STALCO

STALCO PERFECT

STALCO GARDEN



BUILDING ***TRUST***

STALCO is a family company with Polish capital only. Thanks to its people, their friendship, and huge commitment, we have been in business non-stop since 1998.

The milestones of our corporate philosophy and ensured success are high quality of our solutions and strict focus on customer needs.

We are a professional business for which the quality of products and service are top priorities. This is a value for which we take a number of actions to satisfy the ever-increasing, precisely specified expectations of customers who operate on the domestic and international markets.

Our mission of **"Building Trust"** relies on long-term business with our partners and improvement of their business efficiency.

Consistently developing its relationships with customers, suppliers and business partners, Stalco maintains high quality of its products and services, which allows the company to continuously increase its share of the construction market. The company has also been successfully expanding and winning new markets both at home and abroad.

10 PRODUCT **CATEGORIES**

Stalco is involved in both trading and manufacturing operations. Our trading business focuses on the sales of tools in 10 product categories. Our manufacturing business produces fasteners, boards, levels, and shelving rack systems.

HAND TOOLS · EQUIPMENT · CONSTRUCTION TOOLS · PAINTING ACCESSORIES · POWER TOOLS · POWER TOOL ACCESSORIES · FASTENING SYSTEMS · TECHNICAL AND CONSTRUCTION CHEMICALS · OCCUPATIONAL SAFETY AND HEALTH · GARDEN

Today, Stalco is ready to compete with the largest corporations in the world.

We offer our products in two lines - **Stalco and Stalco Perfect.** The addition of the Stalco Perfect line of professional products has enhanced our reputation for superior quality. Stalco provides products that perfectly meet the expectations of professional, specialized, and retail customers.



STANDARD *PRODUCT LINE*

A perfect balance of quality and price. Thanks to their smart design and the latest technologies coupled with premium quality components, these products not only work great for daily DIY tasks and home projects, but also provide a great alternative for contractors who seek high-quality tools at an attractive price. This product line ensures a long service life and work safety.

PROFESSIONAL *PRODUCT LINE*

The Stalco Perfect line consists of products designed with painstaking attention to detail and superior quality components from global manufacturers. Constant quality control is an integral part of the manufacturing process for these products, ensuring their high durability and ergonomic qualities. These efforts have allowed us to create equipment dedicated to professionals who value high quality and the latest technologies, just as much as they demand high strength and uncompromised performance. The products in this line are built for heavy-duty work in extreme conditions, ensuring reliable performance for extended periods to guarantee that the works done are defect-free and robust, no matter the odds.

REINDEXING

NEW SYMBOL STRUCTURE

S+01+02+XXXXX

S	01	02	XXXXX
STALCO STALCO PERFECT STALCO GARDEN	*Category e.g. 01_Hand tools*	*Subgroup e.g. spirit levels, footwear*	*current symbol*

***BACKWARD COMPATIBILITY** - We are keeping the numerical part of the current symbol, as a nod to our customers and employees who have been familiar with the existing symbols for years. At the same time, it makes the process of re-indexing products easier during the transition period.*

Symbols used in the catalogue

Number of items in the set	3 / 15 / 219
Number of teeth in a ratchet device	45T / 72T / 90T
Manufacturing material	S2 / CrV / NYLON
Conformity, standards, protection levels	CE Cat. II / EN ISO 20345 / S1 FO SR
Bit shank shape / screw socket recess designation	
Drill shank system designation	SDS MAX / SDS PLUS
Clothing material	100% COTTON / 60% COTTON 40% POLYESTER / 75% COTTON 20% POLYESTER 3% POLYAMID 2% SPANDEX
Fabric weight per unit area	65 g/m² / 267 g/m² / 380 g/m²
Key product features	ESD
Technical approval – Construction mark	
European Technical Assessment	ETA CE
European Mark of Conformity	CE
Dedicated industry designation for clothing, gloves and footwear	GENERAL CONSTRUCTION / INDUSTRY / INSTALLATION / PAINTING / SERVICE / TRANSPORT AND LOGISTICS / UNIVERSAL / PAVING / AGRICULTURE AND HORTICULTURE / CARPENTRY / CONSTRUCTION / ROAD CONSTRUCTION

Symbols used in the tables

Index no.	
Key information	
Specification	
Product colour	
Packaging	
Unit of measurement	
Rod / screw / bolt diameter	mm / mm
Screw / wall plug length	mm / mm
Threaded section length	mm
Max through drill capacity	mm max
Drilling diameter	mm
Drill hole depth	mm
Drill working length	
Max thickness of item to be fixed	mm
Effective anchorage depth	mm
Wrench size / screw slot	
Material thickness	mm
Basic dimensions	mm
Clamping diameter range	mm

TABLE OF CONTENTS

HAND TOOLS

STALCO		STALCO PERFECT	
Measuring tools	9	Measuring tools	48
Bits and screwdrivers	11	Bits and screwdrivers	52
Wrenches and spanners	17	Wrenches and spanners	53
Cutting tools	27	Cutting tools	67
Pliers and pipe wrenches	31	Pliers and pipe wrenches	69
Hammer-type tools	38	Hammer-type tools	71
Manual fastening tools	41	Manual fastening tools	73
Vices and clamps	43	Vices and clamps	75
Chisels and planers	43		
Files and rasps	44		
Ripoff and scraping tools	45	Ripoff and scraping tools	76
Brushes	45		
Installation tools	45	Installation tools	76
Automotive tools	46	Automotive tools	77

EQUIPMENT

STALCO		STALCO PERFECT	
Transport and storage	80	Transport and storage	94
Ladders	86	Ladders	97
Articles for pneumatics	88	Articles for pneumatics	98
Extension cords and wiring accessories	89	Extension cords and wiring accessories	98
Safety devices	89		
Articles for cleaning	90	Articles for cleaning	99
		Car lifts	99

CONSTRUCTION TOOLS

STALCO		STALCO PERFECT	
Trowels and ladles	101	Trowels and ladles	111
Floats and trowels	102	Floats and trowels	112
Tiling tools	106	Tiling tools	116
Excavation work tools	107	Excavation work tools	118
Pistols and squeezers	108	Pistols and squeezers	119
Welding technology	109		
Building site containers	109	Building site containers	119

PAINTING ACCESSORIES

STALCO		STALCO PERFECT	
Painting tools	121	Painting tools	130
Adhesive tapes	124	Adhesive tapes	134
Foils	127	Foils	136
		Technical tapes	137

POWER TOOLS

STALCO		STALCO PERFECT	
Laser and electronic devices	141	Laser and electronic devices	178
Cordless equipment	142	Cordless equipment	180
Powered tools	159	Powered tools	192
Equipment with combustion engine	175	Equipment with combustion engine	205

POWER TOOL ACCESSORIES

STALCO		STALCO PERFECT	
Screwdriver bits	207	Screwdriver bits	221
Drills	209	Drills	223
Openers and diamond technology	212	Openers and diamond technology	235
Saws and blades	214	Saws and blades	239
Grinding wheels and brushes	216	Grinding wheels and brushes	241
Abrasives	217	Abrasives	242
Saw blades and milling cutters	218	Saw blades and milling cutters	241
Accessories for machines	218		
Stirrers	219	Stirrers	245

FASTENING SYSTEMS

STALCO		STALCO PERFECT	
General fasteners	248	General fasteners	291
Insulation fasteners	256	Insulation fasteners	295
Designed for medium to heavy loads	258	Designed for medium to heavy loads	300
		Chemical anchors	301
Screws	261		
Self-drilling screws	266	Self-drilling screws	304
Rivets	270		
Handles and ties	271	Handles and ties	306
Carpentry joints	275	Carpentry joints	308
Retail packaging – bags	282	Retail packaging – bags	308

TECHNICAL AND CONSTRUCTION CHEMICALS

STALCO PERFECT	
Anchoring chemical products	314
Technical chemistry	314
Car detailing chemical products	315
Household chemicals	316
Health and safety pastes and creams	317
Construction chemicals	317

OSH (OCCUPATIONAL SAFETY AND HEALTH)

STALCO		STALCO PERFECT	
Clothing	327	Clothing	361
Footwear	341	Footwear	369
Gloves	347	Gloves	377
Head and face protection	353	Head and face protection	380
Respiratory protection	355	Respiratory protection	381
Eye protection	356	Eye protection	381
Hearing protection	359	Hearing protection	382
		Fall protection	382

GARDEN

STALCO GARDEN	
Irrigation systems	387
Garden tools	401

Additional information

The manufacturer reserves the right to amend the product sheet without previous notice. The figures and images are for convenience only. Individual colours and technical details might differ as a result of product modification. All the images are the property of Stalco. All the images and descriptions, including all the graphic symbols and text descriptions, are protected by copyright and by other laws designed to protect organisational interest. Any copying, public and online distribution, as well as any other use of this content is prohibited. It is forbidden to copy, share or use the content of this folder in any way without obtaining a relevant written consent from Stalco. STALCO Spółka z ograniczoną odpowiedzialnością S.K.A. reserves the right to make changes and correct errors in this publication.

Any comments or error notifications should be shared by e-mail at: catalogs@stalco.pl

STALCO



HAND TOOLS

Measuring tools

Pocket rule



- non-slip rubber Housing
- magnetic bit makes measurements easy
- nylon-coated tape witH a HigHer resistance to abrasion
- automatic tape lock

S-10003	3 m x 19 mm	1/12/72	pc
S-10005	5 m x 25 mm	1/6/48	pc
S-10007	7.5 m x 25 mm	1/6/48	pc

Tape measure



- non-slip ABS housing with TPS rubber absorbing shock during drops
- three rivets securing the tape hook
- tape accuracy class II
- the measure is equipped with a durable wrist strap
- tape made of high-quality carbon steel, 0.125 mm thick
- total tape thickness (steel + coating): 0.135–0.145 mm
- spring made of 65 Mn manganese steel

S010124202	2 m x 16 mm	1/145/120	pc
S010124203	3 m x 16 mm	1/12/120	pc
S010124205	5 m x 19 mm	1/12/120	pc
S010124208	8 m x 25 mm	1/6/60	pc
S010124210	10 m x 25 mm	1/6/48	pc

Fiberglass tape measure



- impact-resistant housing
- made of reinforced glass fiber
- resistant to abrasion
- folding handle
- scale every 2 mm

S-10620	20 m x 15 mm	1/40	pc
S-10630	30 m x 15 mm	1/32	pc
S-10650	50 m x 15 mm	1/20	pc

Steel tape measure



- non-slip impact-resistant housing
- quick and easy winding thanks to the 3:1 drive gear
- end hook equipped with an additional hook
- tape width 12.5 mm

S-10720	20 m x 12.5 mm	1/40	pc
S-10730	30 m x 12.5 mm	1/32	pc

Steel tape measure



- impact-resistant plastic housing
- folded handle
- tape finished with metal hitch

S-10830	30 m x 13 mm	1/12	pc
S-10850	50 m x 13 mm	1/12	pc

Wooden folding rule



- tough and resilient connection
- lock in 180° position
- scale highly resistant to abrasion
- section thickness 3.2 mm
- hidden joints

S-10321	1 m	1/20/200	pc
S-10322	2 m	1/10/100	pc

Feeler gauge



- 16 blades – standard blade sizes used in mechanics: 0.127 / 0.152 / 0.178 / 0.203 / 0.229 / 0.254 / 0.279 / 0.305 / 0.330 / 0.356 / 0.381 / 0.406 / 0.432 / 0.457 / 0.483 / 0.508 mm
- curved blade design – facilitates access during adjustment
- 65Mn steel – high-quality stainless spring steel 65Mn providing durability and tool accuracy

S010510216	16 blades ; 0,127 - 0,508 mm	1/20/120	pc

Feeler gauge



- most blade sizes used in mechanics: 0.05 / 0.10 / 0.15 / 0.20 / 0.25 / 0.30 / 0.35 / 0.40 / 0.45 / 0.50 / 0.55 / 0.60 / 0.65 / 0.70 / 0.75 / 0.80 / 0.85 / 0.90 / 0.95 / 1.00 mm
- 65Mn steel – high-quality stainless spring steel 65Mn providing durability and tool accurac

S010510220	20 blades ; 0,05 - 1.0 mm	1/20/120	pc

Feeler gauge



- 26 blades – standard blade sizes used in mechanics:
- 0.04 / 0.05 / 0.06 / 0.08 / 0.10 / 0.13 / 0.15 / 0.18 / 0.20 / 0.23 / 0.25 / 0.28 / 0.30 / 0.33 / 0.35 / 0.38 / 0.40 / 0.43 / 0.45 / 0.48 / 0.50 / 0.53 / 0.55 / 0.58 / 0.60 / 0.63 mm
- 65Mn steel – high-quality stainless spring steel 65Mn providing durability and tool accuracy

S010510226	26 blades ; 0,04 - 0,63 mm	1/20/120	pc

Aluminum spirit level



- solid, durable aluminum profile with a wall thickness of 1.4 mm
- measurement accuracy of 0.5 mm/m
- vials resistant to extreme weather conditions, UV radiation and electrostatically neutral
- made in Poland

S-11220	40 cm	1/3	pc
S-11223	60 cm	1/3	pc
S-11226	80 cm	1/3	pc
S-11229	100 cm	1/3	pc
S-11232	120 cm	1/3	pc
S-11235	150 cm	1/40	pc
S-11238	200 cm	1/40	pc

Water level



- facilitates leveling between spaced points
- tight plugs prevent the outflow of water in measuring spots
- unbreakable vials with a clear scale for easy leveling

S-11515	15 m	1/15	pc
S-11520	20 m	1/15	pc
S-11525	25 m	1/15	pc

Aluminum angle bracket



- carpenter's square
- legible scale
- possibility of setting an angle of 45° and 90°

S-11925	250 mm	1/12/60	pc
S-11930	300 mm	1/12/60	pc
S-11935	350 mm	1/12/60	pc
S-11940	400 mm	1/12/60	pc

Adjustable bevel square



- legible scale

S-11983	350 mm	1/10	pc
S-11985	500 mm	1/10	pc
S-11987	750 mm	1/10	pc

Carpenter pencil



- 17.5 cm

S-47007	set 12 pcs	1/12/240	set

Chalk line reel



- handy winder – ensures quick and efficient winding of the chalk line
- foldable crank – makes storage easier
- chalk container – allows easy and trouble-free filling of the reservoir

S010611033	30 m + chalk 120 g	1/6/24	pc

Chalk line powder



- durability – the chalk is waterproof and adheres very well to surfaces
- ease of use – thanks to the specially designed tapered funnel-shaped cap, applying the product is easy and trouble-free
- strength – the solid container protects the contents, ensuring resistance to damage and adverse weather conditions

S010611031	120 g ; blue	1/10/100	pc
S010611032	120 g ; red	1/10/100	pc

Builders line



- various colors
- basketwork
- high resistance to abrasion

S-47050	50 m	1	pc

Bits and screwdrivers

Flat-head screwdriver

CrV



S-12354	3 x 75 mm	1/12/360	pc
S-12356	4 x 100 mm	1/12/360	pc
S-12358	5 x 100 mm	1/12/240	pc
S-12360	6 x 150 mm	1/12/144	pc
S-12362	8 x 150 mm	1/6/96	pc

Philips screwdriver

CrV



S-12330	PH0 x 75 mm	1/12/360	pc
S-12332	PH1 x 100 mm	1/12/240	pc
S-12334	PH2 x 38 mm	1/12/240	pc
S-12336	PH2 x 100 mm	1/12/144	pc
S-12338	PH2 x 150 mm	1/12/144	pc
S-12340	PH3 x 150 mm	1/6/96	pc

Pozidriv screwdriver

CrV



S-12345	PZ0 x 75 mm	1/12/360	pc
S-12347	PZ1 x 100 mm	1/12/240	pc
S-12349	PZ2 x 100 mm	1/12/144	pc
S-12351	PZ3 x 150 mm	1/6/96	pc

Torx screwdriver

CrV



S-12370	T6 x 75 mm	1/12/360	pc
S-12372	T8 x 75 mm	1/12/360	pc
S-12374	T10 x 100 mm	1/12/240	pc
S-12376	T15 x 100 mm	1/12/240	pc
S-12378	T20 x 100 mm	1/12/240	pc
S-12380	T25 x 100 mm	1/12/144	pc
S-12382	T27 x 100 mm	1/12/144	pc
S-12384	T30 x 100 mm	1/12/144	pc
S-12386	T40 x 125 mm	1/6/96	pc

Socket screwdriver



S011117272	1/4" 150 mm	1	pc

Flat screwdriver with a hammer

S2



S-12610	SL6 x 150 mm	1/1	pc
S-12614	SL8 x 200 mm	1/1	pc

Philips screwdriver with hammer end

S2



S-12612	PH2 x 150 mm	1/1	pc
S-12616	PH3 x 200 mm	1/1	pc

Philips screwdriver

S2



S-12550	PH0 x 75 mm	1/1	pc
S-12552	PH1 x 100 mm	1/1	pc
S-12606	PH1 x 250 mm	1/1	pc
S-12554	PH2 x 38 mm	1/1	pc
S-12556	PH2 x 100 mm	1/1	pc
S-12558	PH2 x 150 mm	1/1	pc
S-12608	PH2 x 250 mm	1/1	pc
S-12560	PH3 x 150 mm	1/1	pc

Pozidrive screwdriver

S2



S-12562	PZ0 x 75 mm	1/1	pc
S-12564	PZ1 x 100 mm	1/1	pc
S-12566	PZ2 x 38 mm	1/1	pc
S-12568	PZ2 x 100 mm	1/1	pc
S-12570	PZ3 x 150 mm	1/1	pc

Flat screwdriver

S2



S-12572	SL3 x 75 mm	1/1	pc
S-12574	SL4 x 100 mm	1/1	pc
S-12576	SL5 x 100 mm	1/1	pc
S-12578	SL6 x 38 mm	1/1	pc
S-12580	SL6 x 150 mm	1/1	pc
S-12602	SL4 x 250 mm	1/1	pc
S-12604	SL6 x 250 mm	1/1	pc
S-12582	SL8 x 150 mm	1/1	pc

Torx screwdriver

S2



S-12584	TT6 x 75 mm	1/1	pc
S-12586	TT8 x 75 mm	1/1	pc
S-12588	TT10 x 100 mm	1/1	pc
S-12590	TT15 x 100 mm	1/1	pc
S-12592	TT20 x 100 mm	1/1	pc
S-12594	TT25 x 100 mm	1/1	pc
S-12596	TT27 x 100 mm	1/1	pc
S-12598	TT30 x 100 mm	1/1	pc
S-12600	TT40 x 125 mm	1/1	pc

Socket screwdriver



S011119090	1/4" 150 mm	1	pc

Flexible screwdriver with bits



S-12401	SL5 SL6 SL7 PH1 PH2 PH3 T10 T15 T20 T30 1/4"x25 mm	1/6/24	pc

Ratchet screwdriver with bits



S-12403	SL5, SL6, SL7 PH1, PH2, PH3 T20, T15, T20 H4, H5, H6 1/4" x 25 mm	1/6/24	pc

Set of 4 locksmith screwdrivers for malleting

CrV



▪ 4 pcs.

S-12395	SL6x100 SL8x150 PH2x100 PH3x150	1/6/24	pc

Set of 6 screwdrivers

CrV



▪ 6 pcs.

S-12391	SL4x80 SL5,5x125 SL6,5x150 PH0x75 PH1x80 PH2x100	1/6/24	pc

2-piece screwdriver set

S2



S-12618	SL1.2x6.5x100 mm PH2x100 mm	1	set

Set of 7 screwdrivers

CrV



▪ 7 pcs.

S-12389	SL3x75 SL5x100 SL5x150 SL6x100 PH0x75 PH1x75 PH2x150	1/6/24	pc

4-piece screwdriver set

S2



S-12620	SL 1.0 x 5.5 x 75 mm, 1.2 x 6.5 x 100 m PH1 x 75 mm, PH2 x 100 mm	1	set

Set of 7 screwdrivers

CrV



▪ 7 pcs.

S-12393	SL3x75 SL4x75 SL5,5x125 SL6,5x150 PH0x75 PH1x75 PH2x100	1/6/24	pc

Set of 8 screwdrivers.

S2



S-12622	SL1.6x8.0x150 mm SL1.2x6.5x100 mm SL1.0x5.5x75 mm PH3x150 mm PH2x100 mm PH1x75 mm TT25x100 mm TT15x100 mm	1	set

Set of 114 screwdrivers

CrV



S-12399	3x75 5x75 5x100 6x100 6x150 [mm] PH0x75 PH1x75 PH1x100 PH2x100 PH2x150 PH3x150 [mm] T10x75 T15x75 T20x75 [mm] S1x75 S2x100 [mm] 2.5x40 3.0x40 [mm] PH00x40 PH0x40 [mm] T6x40 mm T8x40 [mm] SL3 SL4 SL4.5 SL5 SL5.5 SL6 SL7 SL8 PH0 PH1 PH2 PH3 PZ0 PZ1 PZ2 PZ3 T6 T8 T10 T15 T20 T25 T27 T30 T35 T40 S0 S1 S2 S3 H1.5 H2.5 H3.0 H3.5 H4.0 H4.5 H5.0 H5.5 H6 H8 PH000 PH00 PH0 PH1 H0,7 H0,9 T4 T5 T6 T7 T8 T9 T10 T15 T20 SL1,5 SL2,0 SL2,5 SL3,0 SL4,0 1/4" x 25 mm 6 7 8 9 10 11 [mm] 1.5 2.0 2.5 3.0 4.0 5.0 5.5 6.0 [mm] 1/16" 5/64" 3/32" 1/8" 5/32" 3/16" 7/32" 1/4"	1/0/3	pc

Voltage tester



S010800140	140 mm	1	pc
S010800140	190 mm	1	pc

Electrical screwdriver 1000 V



- quality and safety confirmed by the VDE GS certificate and the IEC 60900
- standard screwdriver tips made of S2 steel- magnetic
- non-slip, ergonomic 3 component material handle
- the working part of the screwdriver with „SLIM" insulation enabling work in hard-to-reach places

S-12490	SL0.4 x 2.5 x 75 mm	1/12/240	pc
S-12491	SL0.5 x 3.0 x 100 mm	1/12/240	pc
S-12492	SL0.6 x 3.5 x 100 mm	1/12/240	pc
S-12493	SL0.8 x 4.0 x 100 mm	1/12/240	pc
S-12494	SL1.0 x 5.5 x 125 mm	1/12/120	pc
S-12495	SL1.2 x 6.5 x 150 mm	1/12/120	pc
S-12496	PH0 x 60 mm	1/12/240	pc
S-12497	PH1 x 80 mm	1/12/120	pc
S-12498	PH2 x 100 mm	1/12/120	pc
S-12499	PZ0 x 60 mm	1/12/240	pc
S-12500	PZ1 x 80 mm	1/12/120	pc
S-12501	PZ2 x 100 mm	1/12/120	pc
S-12502	T15 4 x 100 mm	1/12/240	pc
S-12503	T20 5.5 x 125 mm	1/12/120	pc
S-12504	T25 5.5 x 125 mm	1/12/120	pc
S-12270	SL/PH1 x 80 mm	1/12/120	pc
S-12274	SL/PH2 x 100 mm	1/12/120	pc
S-12272	SL/PZ1 x 80 mm	1/12/120	pc
S-12276	SL/PZ2 x 100 mm	1/12/120	pc

Electrotechnical screwdrivers 6 pcs.

S2



- steel S2
- 1000 V

S-12280	3 x 100, 4 x 100 [mm] PH0 x 60, PH1 x 80, PH2 x 100 [mm] Tester napięcia 140 mm	1/6/24	set

Electrical screwdrivers 2 pcs.

S2




- steel S2
- 1000 V

S-12282	5,5 x 125 [mm] PH2 x 100 [mm]	1/6/36	set

Electrotechnical screwdrivers 6 pcs.

S2



- steel S2
- 1000 V

S-12284	2,5 x 75, 4.0 x 100, 5,5 x 125 [mm] PH0 x 60, PH1 x 80, PH2 x 100 [mm]	1/6/24	set

4-piece screwdriver set

S2



- quality and safety confirmed by the VDE GS certificate and the IEC 60900 standard

S-12624	1.0 x 5.5 x 75 [mm] PH1 x 75 [mm] Slim VDE: 1.0 x 5.5 x 125 [mm] Slim VDE: PH2 x 100 [mm]	1	set

4-piece screwdriver set

S2



- quality and safety confirmed by the VDE GS certificate and the IEC 60900 standard

S-12626	1.0 x 5.5 x 75, 1.2 x 6.5 x 100 [mm] PH1 x 75, PH2 x 100 [mm] Slim VDE: 1.0 x 5.5 x 125 [mm] Slim VDE: PH2 x 100 [mm]	1	set

Electrical screwdrivers 8 pcs.

CrV



- CrV steel
- 1000 V

S-12286	3 x 100, 4 x 100, 5,5 x 125 [mm] PH1 x 80, PH2 x 100 [mm]	1/6/24	set

Electrical screwdrivers 12 pcs.

CrV



- CrV steel
- 1000 V

S-12288	3 x 100, 5,5 x 125, 6,5 x 100 [mm] PH1 x 80, PH2 x 100 [mm] T10 x 100, T15 x 100, T20 x 100 [mm]	1/12	set

Electrical screwdrivers 13 pcs.

CrV



- CrV steel
- 1000 V

S-12290	3 x 100, 5,5 x 125, 4 x 100, 6,5 x 100 PH1 x 80, PH2 x 100 [mm] PZ1 x 80, PZ2 x 100 [mm] T10 x 100, T15 x 100, T20 x 100 [mm] Tester napięcia & uchwyt	1/12	set

Electrotechnical screwdrivers 6 pcs.

S2



- S2 steel
- 1000 V

S-12292	0.3 x 1.8 x 50, 0.4 x 2.0 x 50, 0.4 x 2.5 x 65, 0.5 x 3.0 x 65 [mm] PH00 x 65, PH0 x 65 [mm]	1/6/48	set

Set of 7 precision screwdrivers

CrV



- 7 pcs.

S-12397	SL1,5x50 SL2x50 SL2,5x50 SL3x50 PH0x75 PH1x80 PH2x100	1/6/24	pc

A set of hooks for precision work



- four types of workshop hooks
- designed for removing O-rings, prying seals and cleaning hard-to--reach places

S-12408	4 items	1/12/48	set

Set of bits and ratchet sockets 36 pcs.

S2



- bits made of S2 steel
- sockets made of CrV

S-13738		1/6/24	set

A set of precision knives



- for precise cutting of foil
- useful in electronics
- sharpener included

S-17544	29 items	1/6/24	set

Screw extractors



- Ø 4" - Ø 24"

S-20950	5 el.	1/20/100	set

Screw extractors



- Ø 4" - Ø 24"

S-20951	8 el.	1/10/100	set

Wrenches and spanners

Ratchet open-end wrench



- made of chrome vanadium steel
- ratchet in the ring spanner
- polished
- anti-corrosion coating

S-56108	8 mm	1/5/200	pc
S-56109	9 mm	1/5/200	pc
S-56110	10 mm	1/5/200	pc
S-56111	11 mm	1/5/100	pc
S-56112	12 mm	1/5/100	pc
S-56113	13 mm	1/5/100	pc
S-56114	14 mm	1/5/100	pc
S-56115	15 mm	1/5/100	pc
S-56116	16 mm	1/5/100	pc
S-56117	17 mm	1/5/50	pc
S-56118	18 mm	1/5/50	pc
S-56119	19 mm	1/5/50	pc

Ratchet open-end wrench, jointed



- made of chrome vanadium steel
- ratchet in the ring spanner
- joint
- polished
- anti-corrosion coating

S-56208	8 mm	1/5/200	pc
S-56210	10 mm	1/5/200	pc
S-56213	13 mm	1/5/100	pc
S-56215	15 mm	1/5/100	pc
S-56217	17 mm	1/5/50	pc
S-56219	19 mm	1/5/50	pc

Ratchet combination wrenches



- made of chrome vanadium steel
- ratchet in the ring spanner
- polished
- anti-corrosion coating
- S-56146: 8, 10, 13, 15, 17, 19 mm
- S-56152: 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm

S-56146	8 - 13 mm	1/5/15	set
S-56152	8 - 19 mm	1/5/15	set

Ratchet open-end wrenches, jointed



- made of chrome vanadium steel
- ratchet in the ring spanner
- joint
- polished
- anti-corrosion coating
- 8, 10, 13, 15, 17, 19 mm

S-56246	8 - 19 mm	1/5/20	set

Swivel ratchet



- 72 teeth

S011154724	1/4" 145 mm	1/10/50	pc
S011154728	3/8" 195 mm	1/5/25	pc
S011154722	1/2" 255 mm	1/5/25	pc

Composite coated swivel ratchet



- 72 teeth

S-54041	1/4" 150 mm	1/10/50	pc
S-54043	3/8" 200 mm	1/5/25	pc
S-54045	1/2" 250 mm	1/5/25	pc

Telescopic ratchet



- 72 teeth

S-54047	1/4" 150-200 mm	1/10/50	pc
S-54049	3/8" 215-315 mm	1/10/50	pc
S-54051	1/2" 305-445 mm	1/5/25	pc

Straight ratchet



- 45 teeth

S-54090	1/4” 150 mm	1/10/50	pc
S-54092	3/8” 210 mm	1/5/25	pc
S-54094	1/2” 265 mm	1/5/20	pc

Tilt ratchet



- 72 teeth

S-54102	1/2” 285 mm	1/5/20	pc

Straight ratchet



- 90 teeth
- metal handle

S011154080	1/4" 135 mm	1/10/50	pc
S011154082	3/8" 200 mm	1/5/25	pc
S011154084	1/2" 245 mm	1/5/100	pc

Bit and socket drive ratchet handle



- 72 teeth

S-54104	1/4” 105 mm	1/10/50	pc

The ratchet is bent



- 90 teeth
- metal handle

S011154114	1/4" 145 mm	1	pc
S011154238	3/8" 195 mm	1	pc
S011154312	1/2" 255 mm	1	pc

Straight ratchet



- 24 teeth durable mechanism made of CrMo
- steel body made of CrV steel
- handy and durable plastic packaging
- ratchet designed for 3/4” sockets and accessories

S-56260	3/4” | 500 mm	1/6	pc

360° ratchet



- 72 teeth

S-54096	1/4” 155 mm	1/10/50	pc
S-54098	3/8” 200 mm	1/5/25	pc
S-54100	1/2” 250 mm	1/5/20	pc

Construction rattle



- CrV steel

S011154000	19 x 22 mm	-	pc

Repair kit for 72 teeth ratchet

CrMo



S-54108	1/4” 72 teeth	1/50	set
S-54110	3/8” 72 teeth	1/25	set
S-54112	1/2” 72 teeth	1/25	set
S-54114	1/4” 45 teeth	1/50	set
S-54116	3/8” 45 teeth	1/25	set
S-54118	1/2” 45 teeth	1/25	set
S-54069	1/4" 90 teeth	1/50/1000	set
S-54071	1/2" 90 teeth	1/25/100	set

Pipe handle 1/2”

CrV



S-54053	250 mm	1/10/50	pc

Swivel handle 1/2”

CrV



S-54055	380 mm	1/5/20	pc

Telescopic handle with joint

CrV



- for sockets or L-keys in size 1/2˝
- made of high-quality CrV steel
- for unscrewing or loosening very tightly tightened connections

S-56272	1/2˝ | 470-620 mm	1/5/20	pc

1/4” extensions set

CrV 3



S-54067	1/4” 3 el.	1/5/50	set

Universal joint set 1/4” 3/8” 1/2”

CrV 3



S-54063	CrV 1/4” 3/8” 1/2”	1/10/50	set

1/2” extensions set

CrV 3



S-54065	1/2” 3 el.	1/5/25	set

Reductions - 3 pcs.



S-76958	1/4, 3/8, 1/2”	1/20/200	set

Pin wrenches and a ratchet for screw connections



- through-hole ratchet mechanism made of CrMo steel
- ratchet body made of CrV steel
- shaft wrenches made of CrV steel
- a set necessary for hydraulic work, containing all the elements needed to work with screw connections

S-56268	3/8” (9.6 mm) ; 29/68” (11.6 mm) ; 1/2” (12.6 mm) 21/32” (16.4 mm) ; 27/32” (21 mm) ; 1/2˝ adapter	1/5/20	pc

Step wrench for screw connections

CrV



- made of CrV steel
- 1/2˝ shank for use with a through ratchet
- necessary in hydraulic work

S-56264	3/8” (9.6 mm) ; 29/68” (11.6 mm) ; 1/2” (12.6 mm) ; 21/32” (16.4 mm) ; 27/32” (21 mm)	1/10/50	pc

Step wrench for screw connections

CrV



- made of CrV steel
- necessary in hydraulic works

S-56266	3/8˝ (9.6 mm) ; 29/68˝ (11.6 mm) ; 1/2˝ (12.6 mm) ; 21/32˝ (16.4 mm) ; 27/32˝ (21 mm)	1/8/48	pc

Bolt extractor socket set

CrMo



- high-quality CrMo steel ensures the tool can be used by professionals
- the internal spiral in the socket automatically grips the damaged bolt or nut, enabling easy removal
- the set includes a punch that allows removing the extracted nut or bolt from the socket
- plastic case – ensures safe storage of the tools

S011133004	11 pcs	1/20	pc

1/2” sockets and ratchet on hanger



- CrV steel
- 72-tooth ratchet
- 12 pieces
- hanger

S011100012	1/2”	1/5/10	pc

1/4” sockets and ratchet on hanger



- CrV steel
- 72-tooth ratchet
- 15 pieces
- hange

S011100015	1/4”	1/5/20	pc

67-piece socket set

CrV 90T HQ



- CrV steel
- 90-tooth ratchet
- 67 pieces
- metal case

S011100067		1/5/10	pc

237-piece socket and tool set

CrV 72T HQ



- CrV steel
- 72-tooth ratchets
- 237 pieces
- plastic tool case

S011100237		1/2	pc

48-piece socket set



- CrV steel
- 90-tooth ratchet
- 48 pieces
- plastic tool cas

S011100048		1/10	pc

Set of 82 socket and combination wrenches



S-54013	1/4" 1/2"	1/0/4	set

84-piece socket set



- CrV steel
- 90-tooth ratchet
- 84 pieces
- plastic tool case

S011100084		1/4	pc

Socket and combination wrench set



- durable and precise ratchet mechanisms – made of CrMo steel, featuring 90 teeth
- combination wrenches included – allow performing most mechanical tasks where a ratchet cannot be used
- 219 pieces – the set contains all essential tools for mechanical and metalworking tasks

S011100219	219 pcs	1/2	pc

94-piece socket set



- CrV steel
- 72-tooth ratchet
- 94 pieces
- plastic tool case

S011100094		1/4	pc

1/4" Torx socket set



- handy plastic case – keeps all sockets organized and safely stored
- standard TORX socket sizes – allows loosening most Torx connections from E4 to E20
- CrV steel – high-quality tool-grade chrome-vanadium steel ensures socket durability

S011100011	11 pcs	1/20	pc

10-piece socket set



- CrV steel
- 90-tooth ratchets
- 110 pieces
- plastic tool case

S011100110		1/4	pc

Torx - HEX - spline screwdriver bits - set. 40 pcs.



S-54106		1/10	set

Set of 3/4” socket wrenches 21 pcs.

CrV 24T 21



S-54007	3/4”	1/0/1	set

Set of 1/4” sockets on a strip 12 pcs.

CrV 12



S-54023	1/4”	1/5/20	set

Socket wrench set



- precision ratchet – 90-tooth mechanism made of CrMo steel
- high-quality CrV steel – ensures resistance to damage and harsh working conditions

S011100025	1/2” 25 pcs	1/4	pc

Set of 1/2” sockets on a strip 8 pcs.

CrV 8



S-54057	1/2”	1/5/20	set

Set of bits on 1/4” sockets on a strip 9 pcs.

CrV 9



S-54019	1/4”	1/10/50	set

Set of 1/2” deep sockets on a strip 8 pcs.

CrV



S-54059	1/2”	1/5/10	set

Set of bits on 1/4” sockets on a strip 11 pcs.

CrV 11



S-54021	1/4”	1/10/20	set

Set of 1/4” deep sockets on a strip 8 pcs.

CrV



S-54061	1/4”	1/5/20	set

Folding hexagonal socket wrenches

CrV



- CrV steel
- 6 sizes for handling hexagonal screws and nuts

S-54022	5, 6, 8, 9, 10, 12 mm	1/6/24	set

T-handle socket wrenches



- type T
- hexagonal socket
- made of high-quality chrome-vanadium steel (CrV)
- allows fast work with hex screws without using additional sockets
- resistant to deformation
- overall length: 310 mm
- handle length: 200 mm

S011199006	6 mm	1/15/60	pc
S011199007	7 mm	1/15/60	pc
S011199008	8 mm	1/15/60	pc
S011199010	10 mm	1/15/60	pc
S011199012	12 mm	1/15/60	pc
S011199013	13 mm	1/15/60	pc
S011199014	14 mm	1/15/60	pc

6-in-1 axle HEX key

CrV



- durability – made of damage-resistant chrome-vanadium steel (CrV)
- ideal solution for removing motorcycle front axles
- prevents the axle from turning while tightening or loosening the wheel nut
- perfect fit – 6 sizes in one tool, suited for front axles of the most popular motorcycle brands
- user convenience – compatible with ratchets as well as socket and combination wrenches

S011348306	12, 14, 17, 19, 22, 24 mm	1/10/60	pc

Set of 8 HEX wrenches

CrV 8



S-46378	9-10-15-20-25-27-30-40, 1.5-2-2.5-3-4-5-6-8 mm	1/12/48	set

hexagonal wrench with ball

CrV



- made of high-quality CrV tool steel, the spherical end allows working with a screw connection
- at an angle

S-48370	1.5 mm	1/200/800	pc
S-48372	2 mm	1/200/800	pc
S-48374	2.5 mm	1/150/600	pc
S-48376	3 mm	1/150/600	pc
S-48378	4 mm	1/150/600	pc
S-48380	5 mm	1/100/400	pc
S-48382	6 mm	1/80/320	pc
S-48384	7 mm	1/50/200	pc
S-48386	8 mm	1/50/200	pc
S-48390	12 mm	1/24/96	pc
S-48388	10 mm	1/40/160	pc
S-48392	14 mm	1/18/72	pc
S-48394	17 mm	1/12/48	pc
S-48396	19 mm	1/8/32	pc
S-48398	21 mm	1/8/16	pc
S-48400	22 mm	1/8/16	pc
S-48402	24 mm	1/6/12	pc
S-48404	27 mm	1/4/8	pc

Set of short HEX wrenches 9 pcs.

CrV



S-46370	H1.5-H2-H2.5-H3-H4-H5-H6-H8-H10	1	set

Set of short hexagonal wrenches with ball 9 pcs.

CrV



S-48368	H1.5-H2-H2.5-H3-H4-H5-H6-H8-H10	1/6/72	set

Set of long hexagonal wrenches with ball 9 pcs.

CrV



S-48366	H1.5-H2-H2.5-H3-H4-H5-H6-H8-H10	1/6/24	set

Set of short HEX wrenches 10 pcs.

CrV



S-46372	H1.5-H2-H2.5-H3-H4-H5-H5.5-H6-H8-H10	1	set

Torx extra long keys with a hole



- the color allows quick identification of sizes
- S2 steel

S-46386	T10,15,20,25,27,30,40,45,50,	1/6/36	set

Set of long Torx wrenches with hole 9 pcs.

CrV



S-46376	TT10-TT15-TT20-TT25-TT27-TT30-TT40-TT45-TT50	1	set

Extra long hexagonal wrenches with ball

S2



- the color allows quick identification of sizes
- S2 steel

S-46384	1.5-2-2.5-3-4-5-6-8-10 mm	1/6/36	set

Set of extra long Torx wrenches with hole 9 pcs.

CrV



S-46374	TT10-TT15-TT20-TT25-TT27-TT30-TT40-TT45-TT50	1	set

HEX bit socket set

CrV S2



- the S2 alloy steel used for the bit shafts is characterized by very high hardness and resistance to deformation and wear, making the screwdrivers meet professional tool standards
- the CrV steel socket provides high hardness and resistance to damage
- the plastic packaging allows safe storage of the set

S011155055	H4, H5, H6, H7, H8,H10, H12, H14, H17	1/10	pc

Torx bit socket set

CrV S2



- the S2 alloy steel used for the bit shafts is characterized by very high hardness and resistance to deformation and wear, making the screwdrivers meet professional tool standards
- the CrV steel socket provides high hardness and resistance to damage
- the plastic packaging allows safe storage of the set

S011166055	T20, T25,T27, T30, T40, T45, T50, T55, T60	1/10	pc

Double-sided Torx L-keys with handle

S2



- S2 steel
- two-material handle
- ergonomic handle

S-56250	T: 10, 15, 20, 25, 30, 40, 45, 50	1	set

HEX bit socket set

CrV S2



- the S2 alloy steel used for the bit shafts is characterized by very high hardness and resistance to deformation and wear, which makes the screwdrivers meet professional tool standards
- the CrV steel socket provides high hardness and resistance to damage
- the plastic packaging allows safe storage of the set

S011155100	H4, H5, H6, H7, H8,H10, H12, H14, H17	1/10	pc

HEX double-sided L-key wrenches with handle



- S2 steel
- two-component material handle
- ergonomic handle
- ball-shaped tip that makes it easier to press at an angle

S-56252	HEX: 2, 2.5, 3, 4, 5, 6, 8, 10 mm	1	set

Torx bit socket set

CrV S2



- the S2 alloy steel used for the bit shafts is characterized by very high hardness and resistance to deformation and wear, which makes the screwdrivers meet professional tool standards
- the CrV steel socket provides high hardness and resistance to damage
- the plastic packaging allows safe storage of the se

S011166100	T20, T25,T27, T30, T40, T45, T50, T55, T60	1/10	pc

Adjustable spanner

CrV



S-76852	CrV 0-23 mm 150 mm	1/6/120	pc
S-76854	CrV 0-28 mm 200 mm	1/6/60	pc
S-76856	CrV 0-32 mm 250 mm	1/6/48	pc

3/8” oil drain plug keys

CrV



- the set is made of high-quality CrV steel, allowing professionals to use the tools without risk of damage
- 18 pieces – the multi-element set enables servicing most oil drain plugs in combustion engines and gearboxes
- the handy case makes storage easy and helps prevent losing components

S011133001	3/8”	1/10	pc

Adjustable wrench



- made of chrome vanadium steel
- bimaterial handle

S-48006	150 mm	1/5/50	pc
S-48008	200 mm	1/5/50	pc
S-48010	250 mm	1/5/40	pc
S-48012	300 mm	1/5/40	pc

Torque wrench



S011100525	1/4" | 5-25Nm | 72 teeth	1	pc
S011101060	3/8" | 10-60Nm | 72 teeth	1	pc
S011102210	1/2" | 20-210 Nm | 72 teeth	1	pc
S011106535	1/2" | 65-350Nm | 72 teeth	1	pc
S011160330	1/2" | 60-330Nm | 72 teeth	1	pc
S011124022	1/2" | 40-220 Nm | 72 teeth	1	pc
S011101680	3/4" | 160-800 Nm | 24 teeth	1	pc
S011121000	3/4" | 200-1000 Nm | 24 teeth	1	pc

Telescopic wheel wrench



- made of high grade steel
- rubber handle

S-48459	17, 19 mm	1/10/20	pc

Wheel nut wrench



- made of high grade steel

S-48412	17, 19, 21, 23 mm	1/5/20	pc

Wheel wrench

CrV



- made of CrV steel with a double--sided socket 17 x 19 mm (the most popular size of screws or nuts for car wheels)
- the wrench has a rotating structure, thanks to which you can unscrew and tighten the wheels very quickly
- thanks to the sliding arm it is possible to use much greater force when unscrewing
- packed in a practical case

S-56270	17 x 19 mm	1/15	pc

Pipe wrench



- made of chrome vanadium steel
- jaws ground and polished

S-15001	1"	1/36	pc
S-15002	1.5"	1/24	pc
S-15003	2"	1/12	pc

Pipe wrench 90°



- made of chrome vanadium steel
- ground and polished jaws

S-15035	1"	1/36	pc
S-15037	1.5"	1/24	pc
S-15039	2"	1/12	pc

Pipe wrench 45°



- made of chrome vanadium steel
- ground and polished jaws

S-15041	1"	1/36	pc
S-15043	1.5"	1/24	pc
S-15045	2"	1/12	pc

Pipe wrench stillson



- made of chrome vanadium steel
- jaws ground and polished

S-15012	300 mm	1/6/24	pc
S-15014	350 mm	1/6/18	pc
S-15018	450 mm	1/4/12	pc
S-15024	600 mm	1/2/6	pc

Bearing puller



- sturdy, die-cast body
- two-sided

S-48464	4”	1/40	pc
S-48466	6”	1/20	pc
S-48468	8”	1/10	pc

Cutting tools

Hook utility knife with foot



- safe operation under voltage up to 1000 V, safety confirmed by VDE GS and IEC60900 certificates
- dual-material handle – improves ergonomics and provides anti-slip properties
- blade made of high-quality steel allows efficient and safe cutting of wires

S011500155	155 mm	1/4/72	pc

Hook utility knife



- safe operation under voltage up to 1000 V, safety confirmed by VDE GS and IEC60900 certificates
- dual-material handle – improves ergonomics and provides anti-slip properties
- blade made of high-quality steel allows efficient and safe cutting of wires

S011500180	180 mm	1/4/72	pc

Fixed blade knife



- strong aluminum body
- fixed blade with safety lock

S-17542	155 mm	1/12/120	pc

Snap off blade knife



S-17318	18 mm	12/48/576	pc

Snap off blade knife



- body made of durable material
- multi-position slide

S-17320	18 mm	1/12/480	pc

Snap off blade knife



- steel guide for increased safety and longer tool life
- blade lock for improved safety

S-17322	18 mm	1/12/288	pc

Fixed blade knife



- ergonomic grip for comfort
- safety blade lock allows for precise cutting

S-17430	18 mm	1/12/144	pc

Snap off blade knife



S-17541	18 mm	1/12/72	pc

Snap off blades



S-17609	9 mm	1/10/600	set
S-17618	18 mm	1/10/200	set

Hook blade



S-17620	0.6 mm	1/10/200	set

Utility blades



- S-17667 blade for S-37184 scraper

S-17665	0.6 x 60 mm	1/20/400	set
S-17667	0.6 x 60 mm	1/50/500	set

Fixed blade knife



- portable belt pouch
- pocket size
- stainless steel

S-17760	180 mm	1/6/48	pc

Fixed blade knife



- portable belt pouch
- pocket size
- stainless steel

S-17765	180 mm	1/6/48	pc

Multi-function knife



- portable belt pouch
- pocket size
- stainless steel

S-17770	180 mm	1/6/48	pc

Glass cutter



- handle made of wood
- grips for breaking glass on the head

S-17750	-	1/6/240	pc

Stripping kinfe



- wooden handle
- double-sided stainless steel blade for durability and corrosion resistance

S-17780	280 mm	1/6/60	pc

Stripping kinfe



- plastic handle
- stainless steel blade for durability and corrosion resistance
- blade thickness 1.5 mm

S-17782	340 mm	1/10/60	pc

Hand saw



- 10 teeth per 1 inch
- hardened teeth
- for fast cutting - 3 cutting planes for each tooth

S-18316	400 mm	1/6/48	pc
S-18318	450 mm	1/6/48	pc
S-18320	500 mm	1/6/48	pc

Hand saw



- 7 teeth per 1 inch
- hardened teeth
- for fast cutting - 3 cutting planes for each tooth

S-18416	400 mm	1/6/48	pc
S-18418	450 mm	1/6/48	pc
S-18420	500 mm	1/6/48	pc

Pruning saw



- wet wood blade
- two-component profiled handle
- holster with belt clip
- 3 cutting planes on each tooth

S-18479	240 mm	1/24	pc

Hand saw



- 7 teeth per 1 inch
- hardened teeth
- for fast cutting - 3 cutting planes for each tooth

S-18431	400 mm	1/10/40	pc
S-18434	450 mm	1/10/40	pc
S-18437	500 mm	1/10/40	pc

Pruning saw



- folding wet wood blade
- two-component profiled handle
- 3 cutting planes on each tooth

S-18482	150 mm	1/10/40	pc

Hand saw



- 11 teeth per 1 inch
- hardened teeth
- for fast cutting - 3 cutting planes for each tooth

S-18440	400 mm	1/10/40	pc
S-18443	450 mm	1/10/40	pc
S-18446	500 mm	1/10/40	pc

Hole saw



- for cutting out shapes
- 2 cutting planes on each tooth

S-18485	250 mm	1/10/40	pc

Bow saw



- strong buckle ensures correct blade tension
- Wet wood blade included

S-18449	530 mm	1/12/24	pc
S-18452	610 mm	1/12/24	pc
S-18455	760 mm	1/12/24	pc

Back saw



- for precise cutting
- 2 cutting planes on each tooth

S-18491	350 mm	1/10/40	pc

Drywall saw



- saw blade for cutting drywall
- 2 cutting planes on each tooth

S-18406	150 mm	1/6/60	pc

Hacksaw



- steel frame
- ergonomic, comfortable handle

S-18534	300 mm	1/6/36	pc

Drywall saw



- drywall saw blade
- 2 cutting planes on each tooth

S-18488	150 mm	1/12/48	pc

Hacksaw



- aluminum frame
- quick and easy blade change
- precise blade tension mechanism

S-18536	300 mm	1/6/24	pc

Aerated concrete saw



- teeth made of sintered carbides
- for cutting aerated concrete blocks

S-18428	700 mm	1/6/12	pc

Bow saw blade



- for weet/dry wood
- 2 cutting planes for each tooth

S-18458	530 mm / dry wood	1/50/200	pc
S-18461	610 mm / dry wood	1/50/200	pc
S-18464	760 mm / dry wood	1/50/200	pc
S-18467	530 mm / wet wood	1/50/200	pc
S-18470	610 mm / wet wood	1/50/200	pc
S-18473	760 mm / wet wood	1/50/200	pc

Hacksaw



- steel frame
- wooden handle

S-18532	300 mm	1/12/48	pc

Metal-to-metal blade



- two-sided wide blade
- precise workmanship prevents the blade from coming off the cutting line when tensioned correctly

S-18512	300 mm	72/720	pc
S-18712	300 mm	72/720	pc

Bi-metal blades - 3 mm



- versatile application
- extended service life
- intended for saws: S-18532, S-18534, S-18536, S-68301, S-68304, S-68307, S-68310

S-18724	300 mm	10/100/1000	pc

Mitre box



- box made of solid wood
- cutting angle: 45°, 90°

S-18212	300 mm	1/10/40	pc

Mitre box with saw



- box made of plastic
- cutting angle: 45°, 90°
- saw included

S-18412	300 mm	1/40	pc

Mitre box



- made of plastic
- scale in mm and inches
- cutting angle: 45°, 90°

S-18494	300 x 140 x 78 mm	1/24	pc

Tin snips



- made of chrome vanadium steel
- for cutting cold-rolled steel up to 1.2 mm
- for cutting acid-resistant steel up to 0.7 mm

S-16301	left	1/5/50	pc
S-16302	straight	1/5/50	pc
S-16303	right	1/5/50	pc

Bolt croppers



- CrV steel head
- ergonomically shaped handles
- hardened blades

S-16614	350 mm	1/30	pc
S-16618	450 mm	1/20	pc
S-16624	600 mm	1/10	pc
S-16630	750 mm	1/5	pc
S-16636	900 mm	1/5	pc

Bolt croppers - mini



S-16408	200 mm	1/6/60	pc

Pliers and pipe wrenches

Universal pliers



- made of chrome vanadium steel
- bimaterial handle for comfort at work

S-14006	160 mm	1/6/60	pc
S-14007	180 mm	1/6/60	pc
S-14008	200 mm	1/6/60	pc

Universal pliers



- made of chrome vanadium steel
- bimaterial handle for comfort at work

S-14205	115 mm	1/12/120	pc

Side cutters



- made of chrome vanadium steel
- bimaterial handle for comfort at work

S-14016	160 mm	1/6/60	pc
S-14017	180 mm	1/6/60	pc

Long nose pliers, straight



- made of chrome vanadium steel
- bimaterial handle for comfort at work

S-14036	160 mm	1/6/60	pc
S-14038	200 mm	1/6/60	pc

Side cutters



- made of chrome vanadium steel
- bimaterial handle for comfort at work

S-14215	115 mm	1/12/120	pc

Long nose pliers, curved



- made of chrome vanadium steel
- bimaterial handle for comfort at work

S-14046	160 mm	1/6/60	pc
S-14048	200 mm	1/6/60	pc

Front cutters



- made of chrome vanadium steel
- bimaterial handle for comfort at work

S-14027	160 mm	1/6/60	pc
S-14028	180 mm	1/6/60	pc

Long nose pliers, straight



- made of chrome vanadium steel
- bimaterial handle for comfort at work

S-14235	115 mm	1/12/120	pc

Front cutters



- made of chrome vanadium steel
- bimaterial handle for comfort at work

S-14225	115 mm	1/12/120	pc

Pincers



- made of chrome vanadium steel
- bimaterial handle for comfort at work

S-14326	160 mm	1/6/60	pc
S-14327	180 mm	1/6/60	pc
S-14328	200 mm	1/6/60	pc

Tower princers



- made of chrome vanadium steel
- bimaterial handle for comfort at work

S-14310	250 mm	1/6/36	pc

Stripping pliers



- hardended jaws
- for tightening the connector terminals 22-10 AWG (1.5-6.0 mm²)

S-14511	0.2 - 6 mm²	1/6/60	pc

Molly forceps



- „Molly" steel dowel pliers

S-14001	4 - 6 mm	1/12/24	pc

Inner seeger pliers, curved



- made of chrome vanadium steel
- bimaterial handle for comfort at work

S-14439	180 mm	1/12/120	pc

Outer seeger pliers, curved



- made of chrome vanadium steel
- bimaterial handle for comfort at work

S-14441	180 mm	1/12/120	pc

Outer seeger pliers, straight



- made of high quality carbon steel
- comfortable non-slip grip for enhanced comfort

S-14443	180 mm	1/12/120	pc

Inner seeger pliers, straight



- made of high quality carbon steel
- comfortable non-slip grip for enhanced comfort

S-14445	180 mm	1/12/120	pc

Slip joint pliers



- wide working range
- made of chrome-vanadium steel (CrV)
- hardened jaws
- nine-position slip joint gear allo-wing quick adjustment of jaw width

S011915180	180 mm ; 0-30 mm	1/6/60	pc
S011915250	250 mm ; 0-46 mm	1/6/60	pc
S011915300	300 mm ; 0-60 mm	1/6/36	pc

Groove joint pliers



- comfortable non-slip grip for enhanced comfort
- 7 position sliding rack for quick jaw adjustment
- body made of vanadium steel
- strong, grinded jaws

S-15005	250 mm	1/6/60	pc
S-15006	300 mm	1/12/48	pc

Water pump pliers



- made of high quality carbon steel
- comfortable non-slip grip for enhanced comfort

S-15010	250 mm	1/6/48	pc

Morse locking pliers



- made of high quality carbon steel
- jaws adapted for hydraulic works
- screw adjusting clamping force

S-14309	225 mm	1/10/40	pc

Crimping pliers for ferrule terminals



S011877001	0.5-16 mm² (22-6 AWG)	1	pc

Crimping pliers for non-insulated terminals



S011877002	22-8AWG	1	pc

Crimping pliers for connector terminals



S011877003	22-10AWG	1	pc

Crimping pliers with replaceable jaws



S011877004	6 pcs.	1	set

Pliers for telephone terminals



S011877005	4P, 6P, 8P	1	pc

Crimping pliers for ferrule terminals



S011877015	sleeve diameter: 0.25 - 6 mm²	1	pc
S011877016	sleeve diameter: 6 -16 mm²	1	pc

Crimping pliers for photovoltaic connectors



S011877006	MC4	1	pc

Insulation stripper



- range: 0.5 - 6 mm²

S011800099	-	1	pc

Crimping pliers



- range: 10 - 50 mm²

S011877010	390 mm	1	pc
S011877011	620 mm	1	pc
S011877012	145 mm	1	pc
S011877013	145 mm	1	pc

Cu/Al cable cutters



- range: 121 mm²
- made of CrV steel

S011700450	450 mm	1	pc
S011700451	800 mm	1	pc

Crimping pliers - set



- 5 pairs of jaws + pliers 220 mm

S011877014	6 pcs.	1	set

Cu wire and cable cutters



S011700088	140 mm	1	pc

Ratchet Cu/Al cable cutter



- for diameter: 240 mm² / 32 mm

S013700021	280 mm	1	pc
S013700020	280 mm	1	pc

Automatic insulation stripper



- 0.32 mm² - 8 mm²

S011855002	AWG 22 - 8	1	pc

Cu/Al cable cutter



- for diameter: 1 - 16 mm

S013700113	180 mm	1	pc
S013700022	180 mm	1	pc

Wire stripping pliers



- the tool's design allows both stripping insulation and crimping terminals
- the high hardness of the jaws enables high-quality connections
- the working range from 0.05 to 8 mm² allows operation with most wires used in electrotechnics and electrical installations

S011855077	0,05 - 8 mm²	1/10/40	pc

Copper pipe cutter



- for diameter: 1 - 3 mm

S013700013	180 mm	1	pc

Automatic insulation stripper



- 0.2 - 6 mm²

S011855003	AWG 24-10	1	pc

Automatic insulation stripper



- 0.05 mm² - 10 mm²

S011855001	AWG 8-30	1	pc

Insulation stripping pliers



- 0.6 - 2.6 mm²

S011855004	AWG 10-22	1	pc

Side cutting and stripping pliers



- range: 1.5 / 2.5 mm²

S011855005	160 mm	1	pc

Long straight pliers



- 1000 V
- VDE

S-14456	200 mm	1	pc

Adjustable pipe pliers



- 1000 V
- VDE

S-14450	250 mm	1	pc

Cable cutter



- 1000 V
- VDE

S-14458	165 mm	1	pc

Combination pliers



- 1000 V
- VDE

S-14452	180 mm	1	pc

Stripping pliers



- 1000 V
- VDE

S-14460	0.2 - 6 mm²	1	pc

Side cutters



- 1000 V
- VDE

S-14454	160 mm	1	pc

Set of insulated tools - screwdrivers, pliers



- 1000 V
- VDE

S-14462	5 pcs.	1	set

Set of insulated tools - screwdrivers, pliers, tester



- 1000 V
- VDE

S-14464	9 pcs.	1	set

Set of insulated tools - screwdrivers, pliers, tester



- 1000 V
- VDE

S-14466	12 pcs.	1	set

Hammer-type tools

Engineer's hammer



- handle made of flexible material
- head: forged carbon steel
- handle: fiberglass

S-19703	300 g	1/6/60	pc
S-19705	500 g	1/6/36	pc
S-19708	800 g	1/6/24	pc
S-19710	1000 g	1/6/24	pc
S-19715	1500 g	1/6/12	pc
S-19720	2000 g	1/6/12	pc

Engineer's hammer



- head – forged steel, induction-hardened
- handle – ash wood
- metal ring under the head
- rubber shock absorber
- steel ring + wooden wedge + epoxy resin

S012024010	100 g	1/12/120	pc
S012024020	200 g	1/6/72	pc
S012024030	300 g	1/6/48	pc
S012024050	500 g	1/6/36	pc
S012024080	800 g	1/6/24	pc
S012024100	1000 g	1/6/18	pc
S012024150	1500 g	1/6/12	pc
S012024200	2000 g	1/4/8	pc

Blacksmith's hammer



- head – forged steel, induction-hardened
- handle – ash wood
- steel ring + wooden wedge

S012024300	3000 g	1/6	pc
S012024500	5000 g	1/4	pc
S012024600	6000 g	1/2	pc
S012024800	8000 g	1/2	pc

Claw hammer



- head equipped with a magnet
- handle: steel tube

S-19406	600 g	1/6/24	pc

Brick hammer



- handle made of flexible material
- handle: steel tube

S-19426	600 g	1/6/24	pc

Carpenter's hammer



- handle made of fiberglass
- bimaterial non-slip handle

S-19445	450 g	1/6/24	pc

Brick hammer



- bimaterial non-slip handle
- handle: fiberglass

S-19526	600 g	1/6/24	pc

Claw hammer



- head equipped with a magnet
- handle: fiberglass
- bimaterial non-slip handle

S-19506	600 g	1/6/24	pc

Brick hammer



- head and handle made of a single piece of metal
- bimaterial non-slip handle

S-19536	600 g	1/6/24	pc

Claw hammer



- head equipped with a magnet
- head and handle made of a single piece of metal
- bimaterial non-slip handle

S-19516	600 g	1/6/24	pc

Stone mason's hammer



- head – forged steel, induction-hardened
- handle – ash wood
- steel ring + wooden wedge

S012025100	1000 g	1/6/18	pc
S012025150	1500 g	1/6/12	pc

Stone mason's hammer with rubber guard



- head – forged steel, induction-hardened
- handle – ash wood
- steel ring + wooden wedge

S012025151	1500 g	1/6	pc
S12025152		1	pc

Nut splitter set

CrMo



- CrMo steel blades allow professional use and efficient cutting of damaged nuts
- simple construction – the very simple tool design enables fast and effective nut cutting
- plastic case – facilitates storage of the set and protects tools from damage

S012100000	4 pcs	1/10	pc

Rubber hammer



- handle made of flexible material
- handle: fiberglass

S-19060	Ø 60 mm	1/10/40	pc
S-19090	Ø 90 mm	1/10/20	pc
S-19115	Ø 115 mm	1/10/20	pc

Chisel



- high quality finish
- handle with hand protection
- increased cutting edge strength

S-20500	250 x 25 mm	1/6/36	pc
S-20502	300 x 25 mm	1/6/24	pc
S-20504	350 x 25 mm	1/6/24	pc

Rubber hammer



- handle made of flexible material
- handle: steel tube

S-19560	Ø 65 mm	1/10/40	pc
S-19590	Ø 90 mm	1/10/20	pc

Wide head chisel



- high quality finish
- handle with hand protection
- increased strength of the cutting edge

S-20506	215 x 76 mm	1/6/36	pc

Plastic/rubber hammer



- handle made of flexible material
- handle: steel tube

S-19535	Ø 35 mm	1/12/48	pc

Puncher



- high quality finish
- handle with hand protection

S-20600	250 mm	1/6/36	pc
S-20602	300 mm	1/6/24	pc
S-20604	350 mm	1/6/24	pc

Crowbar



- made of high-grade carbon steel
- hexagonal reinforced arm cross-section
- the right angle between the arm and the extractor for easier work with high loads

S-20712	300 mm	1/12/36	pc
S-20724	600 mm	1/18	pc
S-20732	700 mm	1/12	pc

Axe



- head: forged carbon steel
- handle: fiberglass

S-19424	600 g	1/24	pc
S-19434	800 g	1/12	pc
S-19440	1000 g	1/12	pc
S-19450	1250 g	1/12	pc
S-19464	1600 g	1/6	pc

Axe with wooden handle



- head – forged steel, induction-hardened
- handle – ash wood
- steel ring + wooden wedge
- epoxy resin – additionally reinforces and protects the working section from loss of volume of the wooden elements bonded to the head

S012332060	600 g	1/24	pc
S012332080	800 g	1/24	pc
S012332100	1000 g	1/12	pc
S012332125	1250 g	1/12	pc
S012332150	1500 g	1/12	pc

Axe with wedge



- head – forged steel, induction-hardened
- handle – ash wood
- steel ring + wooden wedge
- epoxy resin – additionally reinforces and protects the working section from loss of volume in the wooden elements bonded to the head

S012332200	2000 g	1/6	pc

Splitting maul



- head – forged steel, induction-hardened
- handle – ash wood
- steel ring + wooden wedge
- epoxy resin – additionally reinforces and protects the working section from loss of volume in the wooden elements bonded to the head

S012332250	2500 g	1/6	pc

Manual fastening tools

Type 53 staples (53/A)



- galvanized steel staple
- type 53/530/A

S-21206	6 mm	1/10/200	pack
S-21208	8 mm	1/10/200	pack
S-21210	10 mm	1/10/200	pack
S-21212	12 mm	1/10/200	pack
S-21214	14 mm	1/10/200	pack

Tacker



- steel body
- type of staples: 53/530/A

S-21408	staples: A: 4-8 mm	1/20/40	pc

Tacker



- steel body
- adjustable driving power
- type of staples: 53/530/A

S-21410	staples: A: 4-14 mm	1/16/32	pc

Multi-function tacker



- steel body
- handle coated with flexible material
- type of staples: 53/530/A/I/U/T

S-21414	staples: A: 6-14 mm ; I; U; T	1/10/40	pc

Riveter



- for Ø 2.4 - Ø 4 mm stainless steel rivets and steel/aluminum rivets
- steel body
- replaceable bits for rivets Ø 2.4, 3, 3.2 , 4, 4.8, 5 mm

S-21512	250 mm	1/12/24	pc

Cordless glue gun



- working time 10-15 min (without recharging)
- charging 5-7 min.
- uses cartridges with a diameter of 11.2 mm
- high power and operating temperature ensures quick melting of glue

S-21060	80 W	1/6/24	pc

Riveter



- for stainless steel rivets and steel/aluminum rivets
- steel body
- replaceable bits for rivets Ø 2.4, 3, 3.2 , 4, 4.8, 5 mm

S-21514	250 mm	1/12/24	pc

Glue gun



- uses cartridges with a diameter of 11.2 mm
- high power and operating temperature ensures quick melting of glue

S-21100	80 W	1/12/48	pc

Double-point riveter



- for stainless steel rivets and steel/aluminum rivets
- steel body
- replaceable bits for rivets Ø 2.4, 3, 3.2 , 4, 4.8, 5 mm

S-21516	280 mm	1/12/24	pc

Riveter



- for stainless steel rivets and steel/aluminum rivets
- steel body
- replaceable bits for rivets Ø 2.4, 3, 3.2 , 4, 4.8, 5 mm

S-21510	240 mm	1/12/24	pc

Scissor riveter



- for stainless steel rivets and steel/aluminum rivets
- steel body
- replaceable bits for rivets Ø 2.4, 3, 3.2 , 4, 4.8, 5 mm

S-21522	460 mm	1/10	pc

Transformer soldering gun



- handy transformer soldering iron
- built-in installation spot backlight
- plastic box for storage and transport

S-21610	100 W	1/10	pc

Solder



S-21620	Ø 1 mm, 100 g	1/60/240	pc

Vices and clamps

Spring clamps - set



S-76580	25 mm - 8 pcs.	1/100	pc
S-76582	25 mm - 20 pcs.	1/100	pc

Spring clamp



S-76584	38 mm	1/500	pc
S-76586	50 mm	1/240	pc
S-76588	63 mm	1/120	pc
S-76590	75 mm	1/80	pc

Automatic quick-clamping clamp



S-76592	60 x 150 mm	1/12	pc
S-76594	60 x 300 mm	1/12	pc
S-76596	60 x 450 mm	1/12	pc
S-76598	60 x 600 mm	1/12	pc

Bar clamp



S012870515	50 x 150 mm	1/30	pc
S012870525	50 x 250 mm	1/30	pc
S012870830	80 x 300 mm	1/20	pc
S012870130	120 x 300 mm	1/10	pc
S012870150	120 x 500 mm	1/10	pc
S012870180	120 x 800 mm	1/6	pc
S012870110	120 x 1000 mm	1/6	pc
S012870115	120 x 1500 mm	1/4	pc

Chisels and planers

Wood chisel

CrV



- made of high-quality chrome-vanadium steel (CrV)
- anti-slip, dual-component handle
- excellent sharpness and performance
- metal strike cap enabling hammering
- ground blade working surface
- can be resharpened
- high working comfort

S013000006	6 mm	1/6/36	pc
S013000008	8 mm	1/6/36	pc
S013000010	10 mm	1/6/36	pc
S013000012	12 mm	1/6/36	pc
S013000016	16 mm	1/6/36	pc
S013000018	18 mm	1/6/36	pc
S013000020	20 mm	1/6/36	pc
S013000022	22 mm	1/6/36	pc
S013000025	25 mm	1/6/36	pc
S013000032	32 mm	1/6/36	pc
S013000038	38 mm	1/6/36	pc

Wood chisel set

CrV



- made of high-quality chrome-vanadium steel (CrV)
- anti-slip, dual-component handle
- excellent sharpness and performance
- metal strike cap enabling hammering
- ground blade working surface
- can be resharpened
- high working comfort
- durable case ensuring convenient and safe storage

S013000625	6 - 25 mm	1/4/16	pc

Files and rasps

Metal file



- made of high grade steel
- two-component handle
- packed in blisters

S-40303	200 mm ; flat	1/10/100	pc
S-40305	200 mm ; round	1/10/100	pc
S-40307	200 mm ; semicircular	1/10/100	pc
S-40309	200 mm ; triangular	1/10/100	pc

Metal files



- made of high grade steel
- two-component handle
- packed in blisters

S-40333	200 mm	1/5/30	set

Double-cut files



- made of high grade steel
- two-component handle
- plastic box
- flat, semicircular, round, square, triangular

S-40506	100 mm	1/6/48	set

Double-cut files



- made of high grade steel
- diamond coating
- plastic box
- flat, semicircular, round, square, triangular

S-40610	100 mm	1/12/36	set

Wood rasp



- made of high grade steel
- two-component handle
- packed in blisters

S-40411	200 mm ; flat	1/10/100	pc
S-40413	200 mm ; round	1/10/100	pc
S-40415	200 mm ; semicircular	1/10/100	pc

Wood rasps



- made of high grade steel
- two-component handle
- packed in blisters

S-40433	200 mm	1/5/30	set

Files and rasps



- made of high grade steel
- two-component handle
- plastic box
- files: flat, triangular, semicircular
- rasps: semicircular, round

S-40435	200 mm	1/6	set

Ripoff and scraping tools

Coarse file



- easy blade replacement
- plastic body
- for plasterboard, polistyrene foam etc.

S-18806	145 x 40 mm	1/6/60	pc
S-18810	250 x 40 mm	1/6/60	pc

Coarse file blade



S-18906	145 x 40 mm	1/20/200	pc
S-18910	250 x 40 mm	1/20/200	pc

Paint scraper



- comfortable plastic handle
- replacement utility blades S-17667
- blade protection during storage

S-37184	145 x 62 mm	1/100/500	pc

Brushes

Wire brush



- profiled plastic handle
- brass plated wire

S-47715	250 mm	1/12/120	pc

Wire brush



- solid wood handle, profiled
- hole for hanging

S-47723	3-row	1/10	pc
S-47724	4-row	1/10	pc
S-47725	5-row	1/10	pc
S-47726	6-row	1/10	pc

Installation tools

Cable cutter



- PVC-coated handle
- tempered jaws

S-14512	225 mm	1/5/50	pc

Copper pipe cutter



- deburring blade
- easy and convenient adjustment due to screw with a large head
- accurate guidance of circular knife

S-15020	3 - 28 mm	1/12/144	pc

PVC pipe cutter



- effortless work thanks to the ergonomic shape of the handles and gradual feedrate of the knife
- automatic pressure and blade release regulation
- aluminum body

S-15030	0 - 42 mm	1/12/48	pc

Screw taps and screw plates



- made of high grade steel
- metal case

S-20940	M3 - M12	1/10	set

Screw taps for pipes



- the geometry of the blade provides easier start of threading
- new blade profile to ensure the highest quality thread
- larger and more numerous coolant slots for improved lubrication of the blades
- 1/4", 1/2", 3/8", 3/4", 1", 1 1/4"

S-20947	9 el.	1/4	set

Automotive tools

Sealed oil drain pan



- comfortable handles – ensure a secure grip when carrying the pan
- screwable drain and fill plugs – easy emptying and refilling
- sealed vent – improves flow of drained operating fluids

S011499708	8 L	1/6	pc

STALCO
PERFECT



HAND TOOLS

Measuring tools

Tape measure



- nylon tape coating
- double-sided tape makes it easy to read scale
- shockproof housing
- reinforced hitch
- high-speed roll-up mechanism - 3:1 transmission ratio

S-65520	13 mm x 20 m	1/8/24	pc
S-65530	13 mm x 30 m	1/8/24	pc

Double-sided tape measures with magnetic hook



- durability of the housing and components tested from a height of 3 m
- double-sided measuring tape in two colors; top side fluorescent, bottom side white
- nylon-coated tape increases print abrasion resistance, provides anti--corrosion protection and extends tool lifespan
- tape measure equipped with a strong button brake and an additional lower finger stop
- hook equipped with two strong magnets
- 5 m and 8 m tapes with 27 mm tape width can extend horizontally up to 2.8 m

S010126103	3 m x 19 mm	1/6/72	pc
S010126105	5 m x 27 mm	1/6/48	pc
S010126108	8 m x 27 mm	1/6/36	pc

Double-sided auto-lock tape measures



- double-sided printing on the nylon--coated tape provides abrasion and corrosion resistance
- automatic brake makes tape measure operation easier
- dual stainless-steel end hook
- highly ergonomic tape measure housing
- 4 rivets securing the hook to the tape
- 5 m and 8 m tapes with a 27 mm tape width can extend horizontally up to 2.8 m

S010126203	3 m x 19 mm	1/12/144	pc
S010126205	5 m x 27 mm	1/6/48	pc
S010126208	8 m x 27 mm	1/6/36	pc

Wooden folding rule



- made of high quality beech wood
- increased abrasion resistance with double layer of varnish
- accuracy class III

S-65401	1 m	1/48	pc
S-65402	2 m	1/24	pc

Aluminum level



- measurement accuracy 0.0285° = 0.5 mm/m
- powder coating
- 30-year guarantee on the vial
- indicators resistant to impact and UV
- magnifying lens for easy reading
- two-component safety tips
- electronically tested

S-65033	30 cm	1/5	pc
S-65040	40 cm	1/5	pc
S-65050	50 cm	1/5	pc
S-65060	60 cm	1/5	pc
S-65080	80 cm	1/5	pc
S-65100	100 cm	1/5	pc
S-65122	120 cm	1/5	pc
S-65150	150 cm	1/5	pc
S-65200	200 cm	1/5	pc

Aluminum level



- measurement accuracy 0.0285° = 0.5 mm/m
- measurement at an angle of 45°
- powder coating
- 30-year guarantee on the vial
- indicators resistant to impact and UV
- magnifying lens for easy reading
- two-component safety tips
- electronically tested

S-65155	60 cm / 45°	1/5	pc
S-65157	80 cm / 45°	1/5	pc
S-65159	100 cm / 45°	1/5	pc
S-65161	120 cm / 45°	1/5	pc
S-65163	150 cm / 45°	1/5	pc

Pocket level



- measuring accuracy 0.0285° = 0.5 mm/m
- powder coating
- 30-year guarantee on the eyelet
- indicators resistant to impacts and UV rays
- magnifying lenses for easy readouts
- two-component protective tips
- electronically tested

S-65209	19 cm/with magnet	1/5	pc

Aluminum anodized level



- measurement accuracy 0.0285° = 0.5 mm/m
- anodized
- 30-year guarantee on the vial
- indicators resistant to impact and UV
- magnifying lens for easy reading
- two-component safety tips
- electronically tested

S-65604	40 cm	1/5	pc
S-65606	60 cm	1/5	pc
S-65608	80 cm	1/5	pc
S-65610	100 cm	1/5	pc
S-65612	120 cm	1/5	pc
S-65615	150 cm	1/5	pc
S-65620	200 cm	1/5	pc

Aluminum anodized level with magnet



- measurement accuracy 0.0285° = 0.5 mm/m
- anodized
- 30-year guarantee on the vial
- indicators resistant to impact and UV
- magnifying lens for easy reading
- two-component safety tips
- strong magnets
- electronically tested

S-65740	40 cm	1/5	pc
S-65742	60 cm	1/5	pc
S-65744	80 cm	1/5	pc
S-65746	100 cm	1/5	pc
S-65748	120 cm	1/5	pc
S-65750	150 cm	1/5	pc
S-65752	200 cm	1/5	pc

Aluminum level with magnets



- aluminum I-shaped body for increased stiffness, coated with abrasion--resistant powder paint
- 3 vials
- enlarged vial for easy readouts from all sides
- measuring accuracy 0.5 mm / 1 m
- profile milled on both sides
- ergonomic handles
- plugs made of shock-absorbing material with one-sided projections stabilizing the spirit levels on a flat surface
- strong magnets

S-65797	60 cm	1/5	pc
S-65799	80 cm	1/5	pc
S-65801	100 cm	1/5	pc
S-65803	120 cm	1/5	pc

Aluminum level



- aluminum I-shaped body for increased stiffness, coated with abrasion--resistant powder paint
- 3 vials
- enlarged vial for easy readouts from all sides
- measuring accuracy 0.5 mm / 1 m
- profile milled on both sides
- ergonomic handles
- plugs made of shock-absorbing material with one-sided projections stabilizing the spirit levels on a flat surface

S-65781	40 cm	1/5	pc
S-65783	60 cm	1/5	pc
S-65785	80 cm	1/5	pc
S-65787	100 cm	1/5	pc
S-65789	120 cm	1/5	pc
S-65791	150 cm	1/5	pc
S-65792	180 cm	1/5	pc
S-65793	200 cm	1/5	pc
S-65794	250 cm	1/5	pc
S-65796	300 cm	1/5	pc

Angle bracket with horozontal & vertical vials



- anodized aluminum profile
- measurement accuracy 0.0285° = 0.5 mm/m
- 30-year guarantee on the vial
- indicators resistant to impact and UV
- magnifying lens for easy reading
- two-component safety tips
- electronically tested

S-65754	30 x 50 cm	1	pc
S-65756	40 x 60 cm	1	pc
S-65758	50 x 100 cm	1	pc
S-65760	60 x 120 cm	1	pc

Angle bracket without vials



- anodized aluminum profile
- two-component safety tips

S-65762	30 x 50 cm	1	pc
S-65764	40 x 60 cm	1	pc
S-65766	50 x 100 cm	1	pc
S-65768	60 x 120 cm	1	pc

Type HZ floating rule

HZ



- profile made of aluminum

S-65326	150 cm	1/4	pc
S-65327	200 cm	1/4	pc
S-65328	250 cm	1/4	pc

Type DT floating rule

2T



- profile made of aluminum

S-65331	150 cm	1/4	pc
S-65333	200 cm	1/4	pc
S-65335	250 cm	1/4	pc

Type H floating rule

H



- profile made of aluminum with H section

S-65415	150 cm	1/4	pc
S-65420	200 cm	1/4	pc
S-65425	250 cm	1/4	pc

Floating rule with level vials

M



- profile made of aluminum with a width of 9 cm
- level measurement to the nearest 0.5 mm/m
- 30-year guarantee on the vial

S-65115	150 cm	1/5	pc
S-65120	200 cm	1/5	pc
S-65125	250 cm	1/5	pc
S-65130	300 cm	1/5	pc
S-65140	400 cm	1/5	pc

Floating rule with grips and level vials

M



- profile made of aluminum with a width of 9 cm
- level measurement to the nearest 0.5 mm/m
- comfortable grips
- 30-year guarantee on the vial

S-65215	150 cm	1/5	pc
S-65220	200 cm	1/5	pc
S-65225	250 cm	1/5	pc
S-65230	300 cm	1/5	pc
S-65240	400 cm	1/5	pc

Trapezoid floating rule



- profile made of trapezoidal aluminum

S-65012	120 cm	1/5	pc
S-65015	150 cm	1/5	pc
S-65018	180 cm	1/5	pc
S-65020	200 cm	1/5	pc
S-65025	250 cm	1/5	pc
S-65030	300 cm	1/5	pc
S-65039	400 cm	1/5	pc

Floating rule with level vials



- reinforced profile made of aluminum alloy with increased durability
- measuring accuracy 0.0285° = 0.5 mm/m
- indicators resistant to impacts and UV rays

S-65251	200 cm	1	pc
S-65253	250 cm	1	pc
S-65255	300 cm	1	pc

Floating rule without vials



- profile made of aluminum with a thickness of 9 cm

S-65315	150 cm	1/5	pc
S-65320	200 cm	1/5	pc
S-65325	250 cm	1/5	pc
S-65330	300 cm	1/5	pc

Steel tule



- material: aluminum, plastic
- for sheet metal and roofing works

S-65339	400 mm	1	pc

Permanent marker



- line width: 1,5 mm - 3,0 mm
- waterproof
- quick drying
- low-smell ink without Toluene / Xylene
- 10 pcs in box
- for writing and marking on almost any material - plastic, glass, metal, rubber, wood, cardboard, etc.

S-76020	black	1/10	pack
S-76023	red	1/10	pack

Industry marker



- line width: 4mm
- waterproof
- quick drying
- highly opaque ink
- 10 pcs in box
- for writing and marking on almost any material - plastic, glass, metal, rubber, wood, cardboard, etc.

S-76026	black	1/10	pack
S-76029	white	1/10	pack

Masonry pencil 300 mm



- 300 mm

S-76001	bricklayer	12/144/1008	pc

Carpenter'S pencil 300 mm



- 300 mm

S-76003	carpenter	12/144/1008	pc

Pencil 240 mm



- 240 mm

S-76005	bricklayer	12/144/1008	pc
S-76007	carpenter	12/144/1008	pc
S-76009	glass and ceramics	12/144/1008	pc
S-76011	wet surfaces	12/144/1008	pc

Chalk line reel



- handy winder – ensures quick and efficient winding of the chalk line
- foldable crank – makes storage easier
- aluminum reel housing – ensures durability and strength
- chalk container – allows easy and trouble-free filling of the reservoi

S010611034	30 m + chalk 120 g	1/6/24	pc

Alignment tool



- acid-resistant stainless steel
- for sheet metal and roofing works

S-65337	100 mm	1	pc

Lumber crayon



- waterproof
- 12 x 120 mm
- 12 pcs in box
- for writing and marking dry and wet surfaces - brick, concrete, stone, paving stones, wet wood, etc.

S010676032	yellow	1/36/432	pack
S010676033	white	1/36/432	pack
S010676035	red	1/36/432	pack
S010676038	blue	1/36/432	pack

Bits and screwdrivers

Screwdriver set



- tip made of high grade steel S2
- strongly magnetic tip
- handle coated with flexible material for comfort

S-66109	9 el.	1/12	pc

Smartphone servicing kit



S-13800	145 pcs.	1	set

Precision bit set



S-13802	38 pcs.	1	set

Wrenches and spanners

Double open end spanners, polished



- made of chrome vanadium steel
- anti-corrosion coating
- polished

S-76810	10/11 mm	1/25/200	pc
S-76812	12/13 mm	1/25/200	pc
S-76814	14/15 mm	1/25/200	pc
S-76816	16/17 mm	1/10/150	pc
S-76818	18/19 mm	1/10/150	pc
S-76820	20/22 mm	1/10/90	pc
S-76821	21/23 mm	1/10/90	pc
S-76824	24/27 mm	1/10/60	pc
S-76830	30/32 mm	1/10/40	pc

Combination open-end wrench, polished



- made of chrome vanadium steel
- anti-corrosion coating
- polished

S-76706	6 mm	1/25/200	pc
S-76707	7 mm	1/25/200	pc
S-76708	8 mm	1/25/200	pc
S-76709	9 mm	1/25/200	pc
S-76710	10 mm	1/25/200	pc
S-76711	11 mm	1/25/200	pc
S-76712	12 mm	1/25/200	pc
S-76713	13 mm	1/25/200	pc
S-76714	14 mm	1/25/200	pc
S-76715	15 mm	1/25/200	pc
S-76716	16 mm	1/10/150	pc
S-76717	17 mm	1/10/150	pc
S-76718	18 mm	1/10/120	pc
S-76719	19 mm	1/10/120	pc
S-76720	20 mm	1/10/90	pc
S-76721	21 mm	1/10/90	pc
S-76722	22 mm	1/10/90	pc
S-76723	23 mm	1/10/80	pc
S-76724	24 mm	1/10/80	pc
S-76727	27 mm	1/10/60	pc
S-76730	30 mm	1/10/40	pc
S-76732	32 mm	1/10/40	pc
S-76733	33 mm	1/5/30	pc
S-76734	34 mm	1/5/30	pc
S-76735	35 mm	1/5/30	pc
S-76736	36 mm	1/5/20	pc
S-76738	38 mm	1/5/20	pc
S-76741	41 mm	1/5/20	pc
S-76746	46 mm	1/4/16	pc
S-76750	50 mm	1/3/12	pc

Combination wrench with ratchet and switch

CrV



- high-quality CrV tool steel
- switch enabling change of direction
- durable ratchet mechanism

S-76930	8 mm	1/12/120	pc
S-76931	9 mm	1/12/120	pc
S-76932	10 mm	1/12/120	pc
S-76933	11 mm	1/12/120	pc
S-76934	12 mm	1/12/120	pc
S-76936	13 mm	1/6/120	pc
S-76938	14 mm	1/6/120	pc
S-76940	15 mm	1/6/60	pc
S-76941	16 mm	1/6/60	pc
S-76942	17 mm	1/6/60	pc
S-76943	18 mm	1/6/60	pc
S-76944	19 mm	1/6/60	pc
S-76946	21 mm	1/6/60	pc
S-76948	22 mm	1/6/60	pc
S-76950	24 mm	1/6/48	pc
S-76952	27 mm	1/6/30	pc
S-76954	30 mm	1/6/24	pc
S-76956	32 mm	1/6/24	pc

Long double-ended socket wrench with ratchet



- ratchet mechanism with 72 teeth allows precise operation of screw connections
- a wrench with an elongated design allows you to reach bolts located deep in the engine compartment or hard-to-reach bolts in the suspension
- the elongated design allows you to operate with a greater torque compared to a standard wrench

S-76790	8 mm | 235 mm	1/10/200	pc
S-76792	10 mm | 289 mm	1/10/100	pc
S-76794	12 mm | 325 mm	1/5/200	pc
S-76796	13 mm | 360 mm	1/5/100	pc
S-76798	14 mm | 363 mm	1/5/100	pc
S-76800	16 mm | 390 mm	1/5/50	pc
S-76802	17 mm | 403 mm	1/5/50	pc
S-76804	19 mm | 425 mm	1/5/50	pc
S-76806	22 mm | 450 mm	1/5/50	pc

Combination wrench

CrV



- special design facilitating work in hard-to-reach places
- high-quality CrV tool steel
- galvanic coating

S-76900	8 x 90 mm	1/10/300	pc
S-76902	9 x 95 mm	1/10/300	pc
S-76904	10 x 100 mm	1/10/300	pc
S-76906	11 x 105 mm	1/10/300	pc
S-76908	12 x 109 mm	1/10/200	pc
S-76910	13 x 115 mm	1/10/200	pc
S-76912	14 x 118 mm	1/10/200	pc
S-76914	15 x 124 mm	1/10/100	pc
S-76916	16 x 127 mm	1/10/100	pc
S-76918	17 x 134 mm	1/10/100	pc
S-76920	18 x 134 mm	1/10/100	pc
S-76922	19 x 141 mm	1/10/100	pc

Semi-open ring spanner for brake lines

CrV



- high-quality CrV tool steel
- special notch for handling nuts on hydraulic lines
- galvanic coating

S-76880	8 x 9 mm	1/10/400	pc
S-76882	8 x 10 mm	1/10/400	pc
S-76884	11 x 12 mm	1/10/200	pc
S-76886	13 x 14 mm	1/10/200	pc
S-76888	15 x 17 mm	1/5/100	pc
S-76890	16 x 18 mm	1/5/100	pc
S-76892	17 x 19 mm	1/5/100	pc

C-type combination wrench set

CrV



- special shape allowing operation in hard-to-reach places
- high-quality CrV
- tool steel the set includes the most popular sizes
- galvanized coating

S-76896	8 x 10 mm ; 12 x 13 mm ; 14 x 15 mm ; 16 x 17 mm ; 19 x 22 mm	1/6/24	set

Torx ring spanner set

CrV



- the set includes the most popular sizes E6 x 8, E10 x 12, E14 x 18, E20 x 24
- high-quality CrV
- tool steel perfect fit for Torx screws and nuts
- galvanic coating

S-76898	E6 x 8 ; E10 x 12 ; E14 x 18 ; E20 x 24	1/10/10	set

Set of semi-open ring spanners for brake lines, 4 pcs

CrV



- high-quality CrV tool steel
- special cut for handling nuts on hydraulic lines
- galvanic coating
- set includes the most popular sizes

S-76894	8 x 10 mm ; 11 x 12 mm ; 13 x 14 mm ; 15 x 17 mm	1/6/24	set

Double-sided pipe wrench

CrV



- made of CrV tool steel
- passage in the bent part of the key facilitates work with long thread
- 12-point tip on the shorter arm
- 6-point tip on the longer arm

S-76860	8 mm x 118 mm	1/45/180	pc
S-76862	10 mm x 135 mm	1/40/120	pc
S-76864	12 mm x 153 mm	1/30/120	pc
S-76866	13 mm x 166 mm	1/20/80	pc
S-76868	15 mm x 177 mm	1/15/60	pc
S-76870	17 mm x 190 mm	1/15/60	pc
S-76872	19 mm x 225 mm	1/12/48	pc

Polished spanners



- made of chrome vanadium steel
- polished
- anti-corrosion coating

S-76740	6 - 17 mm ; 6 el.	1/40	set
S-76742	6 - 22 mm ; 8 el.	1/24	set
S-76743	6 - 32 mm ; 12 el.	1/8	set

Combination wrenches, polished



- made of chrome vanadium steel
- polished
- anti-corrosion coating

S-76751	6 - 17 mm ; 6 el.	1/40	set
S-76752	6 - 22 mm ; 8 el.	1/20	set
S-76753	6 - 32 mm ; 12 el.	1/8	set
S-76754	6 - 22 mm ; 12 el.	1/20	set
S-76755	6 - 32 mm ; 25 el.	1/4	set

O-ring spanners, bent



- made of chrome vanadium steel
- polished
- anti-corrosion coating

S-76761	6 - 17 mm ; 6 el.	1/24	set
S-76762	6 - 22 mm ; 8 el.	1/16	set
S-76763	6 - 32 mm ; 12 el.	1/6	set

Combination spanner set



- made of chrome vanadium steel
- polished
- anti-corrosion coating

S-76772	6 - 22 mm ; 12 el.	1/16	set

Combination wrenches, polished



- made of chrome vanadium steel
- polished
- anti-corrosion coating
- keys packed on a plastic stand

S-76783	6 - 32 mm ; 12 el.	1/2/8	set
S-76784	6 - 22 mm ; 12 el.	1/4/16	set

1/4” Hexagon socket

CrV



S-85217	4 mm	1/25/200	pc
S-85219	4,5 mm	1/25/200	pc
S-85221	5 mm	1/25/200	pc
S-85223	5,5 mm	1/25/200	pc
S-85225	6 mm	1/25/200	pc
S-85227	7 mm	1/25/200	pc
S-85229	8 mm	1/25/200	pc
S-85231	9 mm	1/25/200	pc
S-85233	10 mm	1/25/200	pc
S-85235	11 mm	1/15/150	pc
S-85237	12 mm	1/15/150	pc
S-85239	13 mm	1/15/150	pc
S-85241	14 mm	1/15/150	pc

1/4” Deep hexagon socket

CrV



S-85243	4 mm	1/25/200	pc
S-85245	4,5 mm	1/25/200	pc
S-85247	5 mm	1/25/200	pc
S-85249	5,5 mm	1/25/200	pc
S-85251	6 mm	1/25/200	pc
S-85253	7 mm	1/25/200	pc
S-85255	8 mm	1/25/200	pc
S-85257	9 mm	1/25/200	pc
S-85259	10 mm	1/25/200	pc
S-85261	11 mm	1/15/150	pc
S-85263	12 mm	1/15/150	pc
S-85265	13 mm	1/15/150	pc
S-85267	14 mm	1/15/150	pc

1/4” Torx socket

CrV



S-85269	E4	1/25/200	pc
S-85271	E5	1/25/200	pc
S-85273	E6	1/25/200	pc
S-85275	E7	1/25/200	pc
S-85277	E8	1/25/200	pc

Universal joint 1/4”

CrV



S-85643	1/4”	1/30/300	pc

Swivel extension 1/4”

CrV



S-85603	50 mm	1/50/500	pc
S-85605	75 mm	1/50/500	pc
S-85607	100 mm	1/25/250	pc
S-85609	150 mm	1/25/200	pc

Adapter for 1/4” bits

CrV



S-85577	bit: 6,35 mm	1/25/250	pc

Reduction 1/4 „f - 3/8” m

CrV



S-85583	1/4”f - 3/8”m	1/25/250	pc

Sliding handle 1/4”

CrV



S-85651	110 mm	1/4/100	pc

Swivel handle 1/4”

CrV



S-85663	140 mm	1/10/60	pc

Flexible extension 1/4”

CrV



S-85639	140 mm	1/24/168	pc

Extension 1/4”

CrV



S-85595	50 mm	1/50/500	pc
S-85597	75 mm	1/50/250	pc
S-85599	100 mm	1/25/250	pc
S-85601	150 mm	1/25/200	pc

3/8” Hexagon socket

CrV



S-85279	8 mm	1/20/200	pc
S-85281	10 mm	1/20/200	pc
S-85283	11 mm	1/20/200	pc
S-85285	12 mm	1/20/200	pc
S-85287	13 mm	1/20/200	pc
S-85289	14 mm	1/20/200	pc
S-85291	15 mm	1/20/200	pc
S-85293	16 mm	1/20/200	pc
S-85295	17 mm	1/20/200	pc
S-85297	18 mm	1/20/200	pc
S-85299	19 mm	1/20/200	pc
S-85301	20 mm	1/20/200	pc
S-85303	21 mm	1/20/200	pc
S-85305	22 mm	1/20/200	pc

3/8” Deep hexagon socket

CrV



S-85307	8 mm	1/20/200	pc
S-85309	10 mm	1/20/200	pc
S-85311	11 mm	1/20/200	pc
S-85313	12 mm	1/20/200	pc
S-85315	13 mm	1/20/200	pc
S-85317	14 mm	1/20/200	pc
S-85319	15 mm	1/20/200	pc
S-85321	16 mm	1/20/200	pc
S-85323	17 mm	1/20/200	pc
S-85325	18 mm	1/20/200	pc
S-85327	19 mm	1/20/200	pc
S-85329	20 mm	1/20/100	pc
S-85331	21 mm	1/20/100	pc
S-85333	22 mm	1/20/100	pc

Universal joint 3/8”

CrV



S-85645	3/8”	1/30/300	pc

Adapter for 3/8” bits

CrV



S-85579	bit: 5/16” 8 mm	1/20/200	pc

Reduction 3/8 „f - 1/4” m

CrV



S-85585	3/8”f - 1/4”m	1/25/250	pc

Reduction 3/8 „f - 1/2” m

CrV



S-85587	3/8”f - 1/2”m	1/25/250	pc

Sliding handle 3/8”

CrV



S-85653	250 mm	1/10/100	pc

Extension 3/8”

CrV



S-85611	75 mm	1/20/200	pc
S-85613	150 mm	1/20/100	pc

Swivel extension 3/8”

CrV



S-85615	75 mm	1/20/200	pc
S-85617	150 mm	1/20/100	pc
S-85619	250 mm	1/10/50	pc

1/2” Hexagon socket



CrV

S-85335	8 mm	1/20/200	pc
S-85337	9 mm	1/20/200	pc
S-85339	10 mm	1/20/200	pc
S-85341	11 mm	1/20/200	pc
S-85343	12 mm	1/20/200	pc
S-85345	13 mm	1/20/200	pc
S-85347	14 mm	1/20/200	pc
S-85349	15 mm	1/20/200	pc
S-85351	16 mm	1/20/200	pc
S-85353	17 mm	1/20/200	pc
S-85355	18 mm	1/20/200	pc
S-85357	19 mm	1/20/200	pc
S-85359	20 mm	1/20/200	pc
S-85361	21 mm	1/20/200	pc
S-85363	22 mm	1/20/200	pc
S-85365	23 mm	1/20/200	pc
S-85367	24 mm	1/20/200	pc
S-85369	25 mm	1/10/100	pc
S-85371	26 mm	1/10/100	pc
S-85373	27 mm	1/10/100	pc
S-85375	28 mm	1/10/100	pc
S-85377	29 mm	1/10/100	pc
S-85379	30 mm	1/10/100	pc
S-85381	31 mm	1/10/100	pc
S-85383	32 mm	1/10/100	pc
S-85974	34 mm	1/10/100	pc
S-85385	36 mm	1/8/40	pc

1/2” Deep Hexagon socket



CrV

S-85387	8 mm	1/20/200	pc
S-85389	9 mm	1/20/200	pc
S-85391	10 mm	1/20/200	pc
S-85393	11 mm	1/20/200	pc
S-85395	12 mm	1/20/200	pc
S-85397	13 mm	1/20/200	pc
S-85399	14 mm	1/20/200	pc
S-85401	15 mm	1/20/200	pc
S-85403	16 mm	1/20/200	pc
S-85405	17 mm	1/20/200	pc
S-85407	18 mm	1/20/200	pc
S-85409	19 mm	1/20/200	pc
S-85411	20 mm	1/20/100	pc
S-85413	21 mm	1/20/100	pc
S-85415	22 mm	1/20/100	pc
S-85417	23 mm	1/20/100	pc
S-85419	24 mm	1/20/100	pc
S-85421	27 mm	1/10/50	pc
S-85423	30 mm	1/10/50	pc
S-85425	32 mm	1/10/50	pc
S-85976	34 mm	1/10/51	pc
S-85427	36 mm	1/4/40	pc

Extension 1/2”

CrV



S-85621	75 mm	1/20/200	pc
S-85623	125 mm	1/20/100	pc
S-85625	250 mm	1/10/50	pc

Swivel extension 1/2”

CrV



S-85627	75 mm	1/20/200	pc
S-85629	125 mm	1/20/100	pc
S-85631	250 mm	1/10/50	pc

Flexible extension 1/2”

CrV



S-85641	200 mm	1/10/20	pc

Universal joint 1/2”

CrV



S-85647	1/2”	1/10/50	pc

Reduction 1/2 „f - 3/8” m

CrV



S-85589	1/2”f - 3/8”m	1/12/120	pc

Swivel handle 1/2”

CrV



S-85665	375 mm	1/5/20	pc
S-85667	450 mm	1/5/20	pc

Reduction 1/2 „f - 3/4” m

CrV



S-85591	1/2”f - 3/4”m	1/12/120	pc

Extension 3/4”

CrV



S-85633	100 mm	1/8/40	pc
S-85635	200 mm	1/6/30	pc
S-85637	400 mm	1/5/10	pc

Adapter for 1/2” bits

CrV



S-85581	bit: 5/16” 8 mm	1/20/200	pc

Universal joint 3/4”

CrV



S-85649	3/4”	1/3/30	pc

Sliding handle 1/2”

CrV



S-85655	250 mm	1/5/25	pc

Reduction 3/4 „f - 1/2” m

CrV



S-85593	3/4”f - 1/2”m	1/4/40	pc

Pipe handle 1/2”

CrV



S-85659	300 mm	1/10/40	pc

Pipe handle 3/4”

CrV



S-85661	450 mm	1/4/8	pc

Sliding handle 3/4”



CrV

S-85657	460 mm	1/2/12	pc

Swivel handle 3/4”



CrV

S-85669	510 mm	1/2/10	pc

1/2” Spline socket



CrV

S-85429	8 mm	1/20/200	pc
S-85431	9 mm	1/20/200	pc
S-85433	10 mm	1/20/200	pc
S-85435	11 mm	1/20/200	pc
S-85437	12 mm	1/20/200	pc
S-85439	13 mm	1/20/200	pc
S-85441	14 mm	1/20/200	pc
S-85443	15 mm	1/20/200	pc
S-85445	16 mm	1/20/200	pc
S-85447	17 mm	1/20/200	pc
S-85449	18 mm	1/20/200	pc
S-85451	19 mm	1/20/200	pc
S-85453	20 mm	1/20/200	pc
S-85455	21 mm	1/20/200	pc
S-85457	22 mm	1/20/200	pc
S-85459	23 mm	1/20/200	pc
S-85461	24 mm	1/20/200	pc
S-85463	27 mm	1/10/100	pc
S-85465	30 mm	1/10/100	pc
S-85467	32 mm	1/10/100	pc
S-85469	36 mm	1/8/40	pc

1/2” Deep spline socket



CrV

S-85471	8 mm	1/20/200	pc
S-85473	9 mm	1/20/200	pc
S-85475	10 mm	1/20/200	pc
S-85477	11 mm	1/20/200	pc
S-85479	12 mm	1/20/200	pc
S-85481	13 mm	1/20/200	pc
S-85483	14 mm	1/20/200	pc
S-85485	15 mm	1/20/200	pc
S-85487	16 mm	1/20/200	pc
S-85489	17 mm	1/20/200	pc
S-85491	18 mm	1/20/200	pc
S-85493	19 mm	1/20/200	pc
S-85495	20 mm	1/20/100	pc
S-85497	21 mm	1/20/100	pc
S-85499	22 mm	1/20/100	pc
S-85501	23 mm	1/20/100	pc
S-85503	24 mm	1/20/100	pc
S-85505	27 mm	1/10/50	pc
S-85507	30 mm	1/10/50	pc
S-85509	32 mm	1/10/50	pc
S-85511	36 mm	1/4/40	pc

12 Piont 1/2” HEX socket



CrV

- chrome-vanadium steel

S-86000	8 mm	1/20/200	pc
S-86002	9 mm	1/20/200	pc
S-86004	10 mm	1/20/200	pc
S-86006	11 mm	1/20/200	pc
S-86008	12 mm	1/20/200	pc
S-86010	13 mm	1/20/200	pc
S-86012	14 mm	1/20/200	pc
S-86014	15 mm	1/20/200	pc
S-86016	16 mm	1/20/200	pc
S-86018	17 mm	1/20/200	pc
S-86020	18 mm	1/20/200	pc
S-86022	19 mm	1/20/200	pc
S-86024	20 mm	1/20/200	pc
S-86026	21 mm	1/20/200	pc
S-86028	22 mm	1/20/200	pc
S-86030	23 mm	1/20/200	pc
S-86032	24 mm	1/20/200	pc
S-86034	25 mm	1/10/100	pc
S-86036	26 mm	1/10/100	pc
S-86038	27 mm	1/10/100	pc
S-86040	28 mm	1/10/100	pc
S-86042	29 mm	1/10/100	pc
S-86044	30 mm	1/10/100	pc
S-86046	32 mm	1/10/100	pc
S-86048	34 mm	1/8/40	pc
S-86050	36 mm	1/8/40	pc

12 Point 1/2” deep HEX socket

CrV



▪ chrome-vanadium steel

S-86052	8 mm	1/20/200	pc
S-86054	9 mm	1/20/200	pc
S-86056	10 mm	1/20/200	pc
S-86058	11 mm	1/20/200	pc
S-86060	12 mm	1/20/200	pc
S-86062	13 mm	1/20/200	pc
S-86064	14 mm	1/20/200	pc
S-86066	15 mm	1/20/200	pc
S-86068	16 mm	1/20/200	pc
S-86070	17 mm	1/20/200	pc
S-86072	18 mm	1/20/200	pc
S-86074	19 mm	1/20/200	pc
S-86076	20 mm	1/20/100	pc
S-86078	21 mm	1/20/100	pc
S-86080	22 mm	1/20/100	pc
S-86082	23 mm	1/20/100	pc
S-86084	24 mm	1/20/100	pc
S-86086	27 mm	1/10/50	pc
S-86088	30 mm	1/10/50	pc
S-86090	32 mm	1/10/50	pc
S-86092	34 mm	1/1	pc
S-86094	36 mm	1/4/40	pc

3/4” Hexagon socket



CrV

S-85513	19 mm	1/10/100	pc
S-85515	21 mm	1/10/100	pc
S-85517	22 mm	1/10/100	pc
S-85519	23 mm	1/10/100	pc
S-85521	24 mm	1/10/100	pc
S-85523	25 mm	1/10/100	pc
S-85525	26 mm	1/6/60	pc
S-85527	27 mm	1/6/60	pc
S-85529	28 mm	1/6/60	pc
S-85531	29 mm	1/6/60	pc
S-85533	30 mm	1/6/60	pc
S-85535	32 mm	1/6/60	pc
S-85537	33 mm	1/6/60	pc
S-85539	34 mm	1/6/60	pc
S-85541	35 mm	1/6/60	pc
S-85543	36 mm	1/6/60	pc
S-85545	38 mm	1/6/60	pc
S-85547	41 mm	1/5/20	pc
S-85549	42 mm	1/5/20	pc
S-85551	43 mm	1/5/20	pc
S-85553	46 mm	1/5/20	pc
S-85555	48 mm	1/4/16	pc
S-85557	50 mm	1/4/16	pc
S-85559	52 mm	1/4/20	pc
S-85561	55 mm	1/4/20	pc
S-85563	60 mm	1/2/20	pc

12 Point 3/4” HEX socket

CrV



▪ chrome-vanadium steel

S-86096	17 mm	1	pc
S-86098	18 mm	1	pc
S-86100	19 mm	1	pc
S-86102	20 mm	1	pc
S-86104	21 mm	1	pc
S-86106	22 mm	1	pc
S-86108	23 mm	1	pc
S-86110	24 mm	1	pc
S-86112	25 mm	1	pc
S-86114	26 mm	1	pc
S-86116	27 mm	1	pc
S-86118	28 mm	1	pc
S-86120	29 mm	1	pc
S-86122	30 mm	1	pc
S-86124	32 mm	1	pc
S-86126	33 mm	1	pc
S-86128	34 mm	1	pc
S-86130	35 mm	1	pc
S-86132	36 mm	1	pc
S-86134	38 mm	1	pc
S-86136	41 mm	1	pc
S-86138	42 mm	1	pc
S-86140	43 mm	1	pc
S-86142	46 mm	1	pc
S-86144	48 mm	1	pc
S-86146	50 mm	1	pc
S-86148	52 mm	1	pc
S-86150	55 mm	1	pc
S-86152	60 mm	1	pc

Magnetic 12-angle socket 3/8” for spark plugs

CrV



S-85565	14 mm	1/10/100	pc

Magnetic 12-angle socket 3/8” for spark plugs with swivel joint

CrV



S-85567	14 mm	1/20/100	pc

Magnetic 6-angle socket 3/8” for spark plugs



S-85569	16 mm	1/20/100	pc

1/2” Plug for spark plugs



S-85571	16 mm	1/15/120	pc
S-85573	18 mm	1/12/60	pc
S-85575	21 mm	1/12/60	pc

Torx spindle spanner on 1/4” socket



S-85671	TT8	1/25/250	pc
S-85673	TT10	1/25/250	pc
S-85675	TT15	1/25/250	pc
S-85677	TT20	1/25/250	pc
S-85679	TT25	1/25/250	pc
S-85681	TT27	1/25/250	pc
S-85683	TT30	1/25/250	pc
S-85685	TT40	1/25/250	pc
S-85687	TT45	1/25/250	pc

HEX spindle spanner on 1/4” socket



S-85689	3 mm	1/25/250	pc
S-85691	4 mm	1/25/250	pc
S-85693	5 mm	1/25/250	pc
S-85695	6 mm	1/25/250	pc
S-85697	7 mm	1/25/250	pc
S-85699	8 mm	1/25/250	pc

Philips spindle spanner on 1/4” socket



S-85701	PH1	1/25/250	pc
S-85703	PH2	1/25/250	pc
S-85705	PH3	1/25/250	pc

Pozidriv spindle spanner on 1/4” socket



S-85707	PZ1	1/25/250	pc
S-85709	PZ2	1/25/250	pc
S-85711	PZ3	1/25/250	pc

1/4” Socket spanner



S-85713	4 mm	1/25/250	pc
S-85715	5,5 mm	1/25/250	pc
S-85717	6,5 mm	1/25/250	pc
S-85719	7 mm	1/25/250	pc

HEX spindle spanner on 1/2” socket

S2 CrV



S-85721	H4 x 55 mm	1/20/160	pc
S-85723	H5 x 55 mm	1/20/160	pc
S-85725	H6 x 55 mm	1/20/160	pc
S-85727	H7 x 55 mm	1/20/160	pc
S-85729	H8 x 55 mm	1/20/160	pc
S-85731	H10 x 55 mm	1/20/160	pc
S-85733	H12 x 55 mm	1/20/160	pc
S-85735	H14 x55 mm	1/20/160	pc
S-85737	H17 x 55 mm	1/20/160	pc
S-85739	H19 x 55 mm	1/20/160	pc
S-85978	H22 x 55 mm	1/20/160	pc

Spline spindle spanner on 1/2” socket

S2 CrV SPLINE



S-85777	M5 x 100 mm	1/20/100	pc
S-85779	M6 x 100 mm	1/20/100	pc
S-85781	M8 x 100 mm	1/20/100	pc
S-85783	M10 x 100 mm	1/20/100	pc
S-85785	M12 x 100 mm	1/20/100	pc
S-85787	M14 x 100 mm	1/20/100	pc
S-85789	M16 x 100 mm	1/20/100	pc
S-85791	M17 x 100 mm	1/20/100	pc

HEX spindle spanner on 1/2” socket

S2 CrV



S-85741	H4 x 100 mm	1/20/100	pc
S-85743	H5 x 100 mm	1/20/100	pc
S-85745	H6 x 100 mm	1/20/100	pc
S-85747	H7 x 100 mm	1/20/100	pc
S-85749	H8 x 100 mm	1/20/100	pc
S-85751	H10 x 100 mm	1/20/100	pc
S-85753	H12 x 100 mm	1/20/100	pc
S-85755	H14 x 100 mm	1/20/100	pc
S-85757	H17 x 100 mm	1/20/100	pc
S-85759	H19 x 100 mm	1/20/100	pc
S-85980	H22 x 100 mm	1/20/100	pc

Torx spindle spanner on 1/2” socket

S2 CrV



S-85793	T20 x 55 mm	1/20/160	pc
S-85795	T25 x 55 mm	1/20/160	pc
S-85797	T27 x 55 mm	1/20/160	pc
S-85799	T30 x 55 mm	1/20/160	pc
S-85801	T40 x 55 mm	1/20/160	pc
S-85803	T45 x 55 mm	1/20/160	pc
S-85805	T50 x 55 mm	1/20/160	pc
S-85807	T55 x 55 mm	1/20/160	pc
S-85809	T60 x 55 mm	1/20/160	pc
S-85811	T70 x 55 mm	1/20/160	pc

Spline spindle spanner on 1/2” socket

S2 CrV SPLINE



S-85761	M5 x55 mm	1/20/160	pc
S-85763	M6 x 55 mm	1/20/160	pc
S-85765	M8 x 55 mm	1/20/160	pc
S-85767	M10 x 55 mm	1/20/160	pc
S-85769	M12 x 55 mm	1/20/160	pc
S-85771	M14 x 55 mm	1/20/160	pc
S-85773	M16 x 55 mm	1/20/160	pc
S-85775	M17 x 55 mm	1/20/160	pc

Torx spindle spanner on 1/2” socket

S2 CrV



S-85813	T20 x 100 mm	1/20/100	pc
S-85815	T25 x 100 mm	1/20/100	pc
S-85817	T27 x 100 mm	1/20/100	pc
S-85819	T30 x 100 mm	1/20/100	pc
S-85821	T40 x 100 mm	1/20/100	pc
S-85823	T45 x 100 mm	1/20/100	pc
S-85825	T50 x 100 mm	1/20/100	pc
S-85827	T55 x 100 mm	1/20/100	pc
S-85829	T60 x 100 mm	1/20/100	pc
S-85831	T70 x 100 mm	1/20/100	pc

Impact reducer 1/4”

CrMo



S-85159	1/4” F × 3/8” M	1/25/250	pc

1/4” Impact ball joint

CrMo



S-85191	1/4”	1/20/200	pc

Impact reducer 3/8”

CrMo



S-85161	3/8” F × 1/4” M	1/25/250	pc
S-85165	3/8” F × 1/2” M	1/25/250	pc

3/8” Impact ball joint

CrMo



S-85193	3/8”	1/20/200	pc

Impact sockets 1/2”

CrMo



S-85001	10 mm	1/20/200	pc
S-85003	11 mm	1/20/200	pc
S-85005	12 mm	1/20/200	pc
S-85007	13 mm	1/20/200	pc
S-85009	14 mm	1/20/200	pc
S-85011	15 mm	1/20/200	pc
S-85013	16 mm	1/20/200	pc
S-85015	17 mm	1/20/200	pc
S-85017	18 mm	1/20/200	pc
S-85019	19 mm	1/20/200	pc
S-85021	20 mm	1/20/200	pc
S-85023	21 mm	1/20/200	pc
S-85025	22 mm	1/20/200	pc
S-85027	23 mm	1/20/200	pc
S-85029	24 mm	1/20/200	pc
S-85031	25 mm	1/10/100	pc
S-85033	26 mm	1/20/200	pc
S-85035	27 mm	1/20/200	pc
S-85037	30 mm	1/10/50	pc
S-85039	32 mm	1/10/50	pc

Impact extension 1/2”

CrMo



S-85175	75 mm	1/20/20	pc
S-85177	125 mm	1/20/20	pc
S-85179	250 mm	1/10/100	pc

1/2” Impact ball joint

CrMo



S-85195	1/2”	1/10/80	pc

Impact reducer 1/2”

CrMo



S-85163	1/2” F × 3/8” M	1/12/120	pc
S-85167	1/2” F × 3/4” M	1/12/120	pc

Impact extension 3/4”

CrMo



S-85181	100 mm	1/6/24	pc
S-85183	175 mm	1/3/30	pc
S-85185	250 mm	1/3/15	pc
S-85187	330 mm	1/2/10	pc

3/4” Impact ball joint

CrMo



S-85197	3/4”	1/3/30	pc

Impact reducer 3/4”

CrMo



S-85169	3/4” F × 1/2” M	1/4/40	pc
S-85171	3/4” F × 1” M	1/5/20	pc

Ball joint set 1/4” 3/8” 1/2”

CrMo 3



S-85199	1/4” / 3/8” / 1/2”	1/10/30	pc

1/2” Deep impact sockets

CrMo



S-85041	10 mm	1/10/100	pc
S-85043	11 mm	1/10/100	pc
S-85045	12 mm	1/10/100	pc
S-85047	13 mm	1/10/100	pc
S-85049	14 mm	1/10/100	pc
S-85051	15 mm	1/10/100	pc
S-85053	16 mm	1/10/100	pc
S-85055	17 mm	1/10/100	pc
S-85057	18 mm	1/10/100	pc
S-85059	19 mm	1/10/50	pc
S-85061	20 mm	1/10/50	pc
S-85063	21 mm	1/10/50	pc
S-85065	22 mm	1/10/50	pc
S-85067	23 mm	1/10/50	pc
S-85069	24 mm	1/10/50	pc
S-85071	25 mm	1/8/40	pc
S-85073	26 mm	1/8/40	pc
S-85075	27 mm	1/8/40	pc
S-85077	30 mm	1/8/40	pc
S-85079	32 mm	1/5/25	pc

Impact sockets 3/4”

CrMo



S-85972	17 mm	1/4/36	pc
S-85081	19 mm	1/4/36	pc
S-85083	21 mm	1/4/36	pc
S-85085	22 mm	1/4/36	pc
S-85087	23 mm	1/4/36	pc
S-85089	24 mm	1/4/36	pc
S-85091	25 mm	1/4/36	pc
S-85093	26 mm	1/4/36	pc
S-85095	27 mm	1/4/36	pc
S-85097	28 mm	1/4/36	pc
S-85099	29 mm	1/4/36	pc
S-85101	30 mm	1/4/36	pc
S-85103	32 mm	1/4/36	pc
S-85105	33 mm	1/4/36	pc
S-85107	34 mm	1/4/36	pc
S-85109	35 mm	1/4/36	pc
S-85111	36 mm	1/4/36	pc
S-85113	38 mm	1/4/36	pc
S-85115	41 mm	1/4/36	pc
S-85117	42 mm	1/4/36	pc
S-85119	43 mm	1/4/16	pc
S-85121	46 mm	1/4/16	pc
S-85123	50 mm	1/4/16	pc
S-85125	52 mm	1/3/12	pc
S-85127	55 mm	1/2/16	pc
S-85129	60 mm	1/3/12	pc

Impact socket 1”



CrMo

S-85131	24 mm	1/2/20	pc
S-85133	27 mm	1/2/20	pc
S-85135	28 mm	1/2/20	pc
S-85137	29 mm	1/2/20	pc
S-85139	30 mm	1/2/20	pc
S-85141	32 mm	1/2/20	pc
S-85143	33 mm	1/2/20	pc
S-85145	34 mm	1/2/30	pc
S-85147	36 mm	1/2/30	pc
S-85149	38 mm	1/2/20	pc
S-85151	41 mm	1/2/20	pc
S-85153	46 mm	1/2/20	pc
S-85155	48 mm	1/2/10	pc
S-85157	50 mm	1/2/10	pc

L-key wrench with Torx 1/2˝ impact socket

CrMo



- made of high-quality CrMo steel
- intended for use with impact tools and handle or ratchet drives

S-85900	T20 | 78 mm	1/20/100	pc
S-85902	T25 | 78 mm	1/20/100	pc
S-85904	T30 | 78 mm	1/20/100	pc
S-85906	T40 | 78 mm	1/20/100	pc
S-85908	T45 | 78 mm	1/20/100	pc
S-85910	T50 | 78 mm	1/20/100	pc
S-85912	T55 | 78 mm	1/20/100	pc
S-85914	T60 | 78 mm	1/20/100	pc
S-85916	T70 | 78 mm	1/20/100	pc

HEX key with 1/2˝ HEX impact socket

CrMo



- made of high-quality CrMo steel
- intended for use with impact tools and handle or ratchet drives

S-85918	H5 | 78 mm	1/20/100	pc
S-85920	H6 | 78 mm	1/20/100	pc
S-85922	H8 | 78 mm	1/20/100	pc
S-85924	H10 | 78 mm	1/20/100	pc
S-85926	H12 | 78 mm	1/20/100	pc
S-85928	H14 | 78 mm	1/20/100	pc
S-85930	H17 | 78 mm	1/20/100	pc
S-85932	H19 | 78 mm	1/20/100	pc

L-key wrench with ribe 1/2˝ impact socket

CrMo



- made of high-quality CrMo steel
- intended for use with impact tools and handle or ratchet drives

S-85934	R5 | 78 mm	1/20/100	pc
S-85936	R6 | 78 mm	1/20/100	pc
S-85938	R7 | 78 mm	1/20/100	pc
S-85940	R8 | 78 mm	1/20/100	pc
S-85942	R9 | 78 mm	1/20/100	pc
S-85944	R10 | 78 mm	1/20/100	pc
S-85946	R12 | 78 mm	1/20/100	pc
S-85948	R13 | 78 mm	1/20/100	pc
S-85950	R14 | 78 mm	1/20/100	pc

Spline 1/2˝ Hexagon socket wrench

CrMo



- made of high-quality CrMo steel
- intended for use with impact tools and handle or ratchet drives

S-85952	M4 | 78 mm	1/20/100	pc
S-85954	M5 | 78 mm	1/20/100	pc
S-85956	M6 | 78 mm	1/20/100	pc
S-85958	M8 | 78 mm	1/20/100	pc
S-85960	M9 | 78 mm	1/20/100	pc
S-85962	M10 | 78 mm	1/20/100	pc
S-85964	M12 | 78 mm	1/20/100	pc
S-85966	M14 | 78 mm	1/20/100	pc
S-85968	M16 | 78 mm	1/20/100	pc
S-85970	M17 | 78 mm	1/20/100	pc

Impact extension 1”

CrMo



S-85189	250 mm	1/2/10	pc

Impact reducer 1”

CrMo



S-85173	1” F × 3/4” M	1/4/40	pc

1/2” Wheel impact sockets



S-85201	17 mm	1/5/50	pc
S-85203	19 mm	1/10/50	pc
S-85205	21 mm	1/5/50	pc
S-85207	22 mm	1/8/40	pc

Adjustable spanner



S-76840	CrV 0-34 mm 150 mm	1/6/96	pc
S-76842	CrV 0-38 mm 200 mm	1/6/72	pc
S-76844	CrV 0-50 mm 250 mm	1/5/30	pc

Adjustable spanner



S-76846	CrV 0-28 mm 150 mm	1/6/72	pc
S-76848	CrV 0-32 mm 200 mm	1/6/60	pc
S-76850	CrV 0-43 mm 250 mm	1/5/30	pc

Cutting tools

Snap off blade knife



- ergonomic body
- automatic blade lock in selected position
- metal guides
- 50% sharper thanks to the three--plane cutting edge

S-67415	9 mm	1/24/244	pc

Snap off blade knife



- ergonomic body
- automatic blade lock in selected position
- metal guides
- 50% sharper thanks to the three--plane cutting edge

S-67416	18 mm	1/24/144	pc

Snap off blade



- snap off blades 18 mm - 7 segments
- blade thickness - 0.5 mm
- 10 blades in the set
- 50% sharper thanks to 3-plane cutting edge

S-17628	18 mm	1/20/160	set

Utility bladee



- blade thickness - 0.6 mm
- 10 blades in the set

S-17662	0.6 x 62 mm	1/20/240	set

Snap off blade - silver



- made of high-quality steel with increased carbon content – 1.25%
- polished surface for increased corrosion resistance

S-67465	18 mm	1/20/480	set

Utility blades - silver



- made of high-quality steel with increased carbon content – 1.25%
- polished surface for increased corrosion resistance

S-67467	0.6 x 62 mm	1/20/480	set

Hook blades - silver



- made of high-quality steel with increased carbon content – 1.25%
- polished surface for increased corrosion resistance

S-67469	0.6 mm	1/20/480	set

Hacksaw mini



- ergonomic handle covered with a soft material
- suspension handle allows using different blade lengths and adjusting them in a wide range
- metal-cutting blade made of high carbon steel
- the small size of the handle and the way of mounting the blade allows it to bend, enabling you to cut in tight and hard to reach places

S-68301	300 mm	1/12/120	pc

Hacksaw



- ergonomic handles coated with a soft material
- fine adjustment of the blade tension force
- possibility of mounting the blade at an angle of 90° or 45°
- complete with metal-cutting blade made of high carbon steel
- replacement and adjustment of blade tension force without tools

S-68304	300 mm	1/6/24	pc

Hacksaw



- ergonomic handles coated with a soft material
- fine adjustment of the blade tension force
- possibility of mounting the blade at an angle of 90° or 45°
- complete with metal-cutting blade made of high carbon steel
- replacement and adjustment of blade tension force without tools

S-68307	300 mm	1/6/36	pc

Hacksaw



- ergonomic handles coated with a soft material
- fine adjustment of the blade tension force
- possibility of mounting the blade at an angle of 90° or 45°
- complete with metal-cutting blade made of high carbon steel
- replacement and adjustment of blade tension force without tools
- snap buckle allows for rapid blade replacement

S-68310	300 mm	1/6/24	pc

Cobalt blade



- 18 teeth/1 inch
- made of steel with the addition of cobalt
- for saws: S-18532, S-18534, S-18536, S-68301, S-68304, S-68307, S-68310

S-68318	300 mm	10/100	pc

Aviation snips



- professional roofing shears made of forged high carbon steel
- hardened induction jaws
- for cutting steel sheets up to 0.87 mm thick
- for cutting stainless steel sheets up to 0.45 mm thick
- for cutting copper sheets up to 0.94 mm thick

S-67303	left	1/6/36	pc
S-67305	right	1/6/36	pc

Aviation snips



- professional roofing shears made of forged high carbon steel
- induction hardened jaws
- for cutting steel sheets up to 0.87 mm thick
- for cutting stainless steel sheets up to 0.45 mm thick
- for cutting copper sheets up to 0.94 mm thick

S-67307	right	1/6/24	pc

Tin snips



- made of chrome-molybdenum steel
- special teeth prevent the cut material from slipping

S-67311	left	1/6/48	pc
S-67313	right	1/6/48	pc

Tin snips



- made of chrome-molybdenum steel
- special teeth prevent the cut material from slipping
- for cutting carbon steel to a thickness of 1.2 mm
- for cutting stainless steel to a thickness of 0.7 mm

S-67321	left	1/6/48	pc
S-67322	straight	1/6/48	pc
S-67323	right	1/6/48	pc

Bolt croppers - mini



- jaws made of chrome-molybdenum steel
- non-slip grip
- safety clip

S-67612	200 mm	1/6/48	pc

Bolt croppers



- head made of chrome-molybdenum steel
- ergonomically shaped handles
- additionally hardened blades

S-67614	350 mm	1/6/24	pc
S-67618	450 mm	1/6/12	pc
S-67624	600 mm	1/2/12	pc
S-67630	750 mm	1/6	pc
S-67636	900 mm	1/4	pc
S-67642	1050 mm	1/2	pc

Cable cutters



- strong jaws made of chrome-molybdenum steel
- double-lever mechanism
- profiled two-component handle
- security cord hole
- for cutting aluminum and copper cables and wires

S-67031	230 mm	1/6/36	pc

Pliers and pipe wrenches

Universal pliers



- CR-V steel body
- electrically insulated handles - VDE 1000 V

S-67001	160 mm	1/5/50	pc
S-67004	180 mm	1/5/50	pc
S-67007	200 mm	1/5/50	pc

Universal pliers



- Cr-V 56HRC steel body
- two-component handle
- serrated gripping surfaces
- wire cutting blades

S-67032	160 mm	1/5/50	pc
S-67034	180 mm	1/5/50	pc
S-67037	200 mm	1/5/50	pc

Long nose pliers, straight



- CR-V steel body
- electrically insulated handles - VDE 1000 V

S-67016	160 mm	1/5/50	pc
S-67022	200 mm	1/5/50	pc

Long nose pliers, straight



- Cr-V 56HRC steel body
- two-component handle
- serrated gripping surfaces
- wire cutting blades

S-67046	160 mm	1/5/50	pc
S-67049	200 mm	1/5/50	pc

Long nose pliers, curved



- Cr-V 56HRC steel body
- two-component handle
- serrated gripping surfaces angled at 45°
- wire cutting blades

S-67052	160 mm	1/5/50	pc
S-67055	200 mm	1/5/50	pc

Side cutters



- CR-V steel body
- electrically insulated handles - VDE 1000 V

S-67010	160 mm	1/5/50	pc

Side cutters



- Cr-V 56HRC steel body
- two-component handle

S-67040	160 mm	1/5/50	pc
S-67043	180 mm	1/5/50	pc

Stripping pliers



- CR-V steel body
- electrically insulated handles - VDE 1000 V

S-67025	160 mm	1/5/50	pc

Water pump pliers



- CR-V steel body
- electrically insulated handles - VDE 1000 V
- 7-step setting mechanism

S-67028	250 mm	1/5/50	pc

Groove joint pliers



- universal jaws
- precise adjustable bar - 17 positions
- lock
- anti-snag and non-slip handle

S-67925	250 mm	1/5/50	pc

Hammer-type tools

Engineer's hammer



- forged hammerhead, hardened in accordance with DIN
- rubber flange protecting the handle
- ash wood handle
- metal wedge for long-lasting hammerhead attachment to the handle

S-69101	100 g	1/10	pc
S-69102	200 g	1/10	pc
S-69103	300 g	1/10	pc
S-69105	500 g	1/10	pc
S-69108	800 g	1/10	pc
S-69110	1000 g	1/10	pc
S-69115	1500 g	1/6	pc
S-69120	2000 g	1/6	pc

Engineer's hammer



- two-component handle
- fiber-glass shaft
- strong hammerhead

S-69203	300 g	1/6/36	pc
S-69205	500 g	1/6/24	pc
S-69208	800 g	1/4/16	pc
S-69210	1000 g	1/4/24	pc
S-69215	1500 g	1/4/16	pc
S-69220	2000 g	1/4/12	pc

Claw hammer



- tubular steel shaft
- two-component handle
- reinforced connection between the hammerhead and the handle with additional protection
- deeply grooved hammerhead tip
- strong spike for levering
- socket with magnet
- slot for pulling nails

S-69406	600 g	1/6/24	pc

Claw hammer



- fiber-glass handle
- two-component handle
- deeply grooved hammerhead tip
- strong spike for levering
- socket with magnet
- slot for pulling nails

S-69416	600 g	1/6/24	pc

Claw hammer



- hammerhead and shaft made from a single piece of steel
- two-component handle
- deeply grooved hammerhead tip
- strong spike for levering
- socket with magnet
- slot for pulling nails

S-69426	600 g	1/6/24	pc

Carpenter's hammer



- fiber-glass shaft
- two-component handle
- claw for pulling nails

S-69445	450 g	1/6/24	pc

Claw hammer



- hammerhead and shaft made from a single piece of steel
- antishock - patented vibration-re-duction system
- two-component handle
- socket with magnet
- claw for pulling nails

S-69465	600 g	1/4/24	pc

Brick hammer



- tubular steel shaft
- two-component handle
- reinforced connection between the hammerhead and the handle with additional protection
- slot for pulling nails

S-69446	600 g	1/6/24	pc

Paving hammer



- replaceable heads made of high--quality rubber or polyurethane
- replaceable beech wood handle
- powder coated cast iron clamps

S-69245	Ø 30 mm / 90sh / guma / 0,3 kg	1/50	pc
S-69246	Ø 30 mm / 90sh guma + 75sh poliuretan	1/50	pc

Paving hammers heads



- replaceable hammerheads made of high-quality rubber or yellow polyurethane

S-69223	Ø 60 mm	1/5	pc
S-69225	Ø 60 mm	1/5	pc

Paving hammer



- replaceable heads made of high--quality rubber
- replaceable beech wood handle
- powder coated cast iron clamps

S-69247	Ø 60 mm / 90sh / 200 mm / 1,90 kg	1/10	pc
S-69248	Ø 60 mm / 90sh / 900 mm / 2,25 kg	1/10	pc

Paving hammer



- replaceable hammerheads made of high-quality rubber or yellow polyurethane
- replaceable ash handle
- powder coated cast iron clamps

S-69231	Ø 60 mm / 340 mm / 40 mm / 1,85 kg	1/10	pc
S-69233	Ø 60 mm / 340 mm / 60 mm / 2 kg	1/10	pc

Paving hammer set



- replaceable heads made of high--quality rubber, hardness 90sh or polyurethane, hardness 65sh and 75sh
- replaceable beech wood handle
- powder-coated cast iron clamps

S-69249	Ø 30 mm / 4 el.	1/10	pc

Paving hammer



- replaceable heads made of high--quality rubber
- replaceable beech wood handle
- powder coated cast iron clamps

S-69235	Ø 50 mm / 90sh / 1150 g	1/20	pc

Paving hammer handle



- beech wood
- non-slip handle

S-69253	Ø 30 mm / 250 mm	1/20	pc
S-69255	Ø 50 mm / 300 mm	1/10	pc
S-69257	Ø 60 mm / 250 mm	1/8	pc
S-69259	Ø 60 mm / 340 mm	1/8	pc
S-69261	Ø 60 mm / 900 mm	1/8	pc

Chisel



- tip made of high quality chrome vanadium steel
- bi-material ergonomic handle protecting the hand

S-69512	25 x 300 mm	1/4/24	pc

Wide head chisel



- tip made of high quality chrome vanadium steel
- bimaterial ergonomic handle protecting the hand

S-69516	76 x 215 mm	1/4/24	pc

Puncher



- tip made of high quality chrome vanadium steel
- bimaterial ergonomic handle protecting the hand

S-69610	250 mm	1/4/24	pc

Axe



- hickory wood shaft
- non-slip shaft coating
- hardened hammerhead, forged of carbon steel
- metal wedges connecting the hammerhead with the shaft

S-69306	600 g	1/6/24	pc
S-69308	800 g	1/6/18	pc
S-69310	1000 g	1/6/18	pc
S-69312	1250 g	1/4/12	pc
S-69314	1400 g	1/8	pc

Multi-purpose axe



- hardened hammerhead, drop--forged from C45 carbon steel
- ash wood handle finished with a non-slip coating
- additional hammerhead protection
- flat bar protecting against loose-ning and breaking the shaft
- blade hardness: 45HRV

S-69316	1150 g	1	pc
S-69318	1150 g	1	pc

Axe



- fiber-glass shaft
- two-component handle
- hardened hammerhead, forged of carbon steel

S-69336	600 g	1/4/24	pc
S-69338	800 g	1/6/24	pc
S-69340	1000 g	1/4/16	pc

Manual fastening tools

Tacker



- professional stapler with wide application
- sturdy metal body
- adjustable driving power
- folding handle

S-21418	staples A: 6 - 14 mm ; T: 14 mm	1/10/20	pc

Tacker



- plastic housing
- super light
- for light upholstery work

S-70410	staples A: 6 - 10 mm	1/10/80	pc

Tacker



- lightweight steel body
- for light upholstery work

S-70412	staples A: 6 - 10 mm	1/10/80	pc

Aluminum tacker



- professional aluminum stapler with a very wide range of applications
- aluminum body ensures low weight and high strength
- handle coated with flexible material for improved comfort
- adjustable driving power

S-70420	staples A: 6 - 10 mm ; T: 12 - 14 mm ; I ; 14 mm	1/10/40	pc

Hammer tacker



- robust steel body
- handle covered with flexible material
- for fixing materials such as thick foil, roofing felt

S-70580	staples: G : 6, 8, 10 mm	1/10/200	pc

Type a staples



- steel staples, hardened, galvanized

S-21436	6 mm	1/5/200	pack
S-21438	8 mm	1/5/200	pack
S-21440	10 mm	1/5/100	pack
S-21442	12 mm	1/5/100	pack
S-21444	14 mm	1/5/100	pack

Type g staples



- steel staples, hardened, galvanized
- for fixing thick materials: thick foil, roofing felt

S-70584	6 mm	1/20/160	pack
S-70586	8 mm	1/20/160	pack
S-70588	10 mm	1/20/160	pack

Type i staples



- steel nails, hardened, galvanized

S-70324	14 mm	1/20/100	pack

Glue gun



- professional glue gun
- max. power: 80 W
- quick melting of the glue cartridge
- non-drip tip precisely distributes the glue
- glue cartridge Ø 11.2 mm

S-21110	80 W	1/6/12	pc

Glue gun



- professional glue gun
- max. power: 55 W
- quick melting of the glue cartridge
- non-drip tip precisely distributes the glue
- glue cartridge Ø 11.2 mm

S-70114	55 W	1/12/24	pc

Glue gun



- professional glue gun
- max. power: 100 W
- built-in power switch
- quick melting of the glue cartridge
- non-drip tip precisely distributes the glue
- glue cartridge Ø 11.2 mm

S-70119	100 W	1/6/12	pc

Hot-melt glue sticks



- professional glue cartridge designed for glue guns working at low and high temperatures

S-70130	Ø 11.2 x 300 mm	1/20/60	set
S-70135	Ø 11.2 x 300 mm	1/20	set

Riveter



- robust steel body
- long handle for easy operation
- 4 replaceable tips for rivets Ø 2, 3, 4, 5 mm

S-21614	270 mm	1/6/24	pc

Vices and clamps

Quick lever clamp



- strong clamp guide made from one piece of steel
- the loosening ratchet opens the lever quickly and easily
- the lever very the desired power quickly reaches, as with screw clamps

S-76120	120 x 200 mm	1/2/10	pc
S-76130	120 x 300 mm	1/2/8	pc
S-76150	120 x 500 mm	1/2/8	pc
S-76160	120 x 600 mm	1/2/8	pc

Automatic quick-clamping clamp



S-76530	80 x 150 mm	1/10	pc
S-76532	80 x 300 mm	1/10	pc
S-76534	80 x 450 mm	1/10	pc
S-76536	80 x 600 mm	1/8	pc
S-76538	80 x 750 mm	1/8	pc
S-76540	80 x 900 mm	1/8	pc

Spring clamp



S-76542	50 mm	1/60	pc
S-76544	65 mm	1/100	pc
S-76546	75 mm	1/48	pc
S-76548	100 mm	1/50	pc

Deep spring clamp



S-76550	50 mm	1/60	pc
S-76552	75 mm	1/48	pc

Reinforced spring clamp



S-76554	85 mm	1/60	pc
S-76556	50 mm	1/80	pc

Reinforced spring clamp



S-76558	100 mm	1/40	pc

Quick-release ratchet lever clamp



S-76560	100 x 250 mm	1/12	pc
S-76562	100 x 300 mm	1/12	pc
S-76564	100 x 400 mm	1/12	pc
S-76566	100 x 600 mm	1/12	pc
S-76568	100 x 800 mm	1/12	pc

Angle clamp



S-76570		1/48	pc

C-clamp



S-76572	Type C 25 mm	1/40/160	pc
S-76574	Type C 50 mm	1/12/48	pc
S-76576	Type C 100 mm	1/12/24	pc
S-76578	Type C 150 mm	1/6/12	pc

Ripoff and scraping tools

Plaster scrubber



- aluminum frame
- 8 x hardened steel blade

S-73590	0	1/20	pc

Floor scrubber



- blade-sheet (hardened carbon steel)
- blade mounting design – reinforced
- reinforcement frame: galvanized carbon steel
- handle – slim beech, 155 cm long
- M6 – screws securing the blade to the rack

S-73591	300 / 155 / 1.2 mm	1	pc

Installation tools

PVC pipe cutter



- aluminum body
- plastic coated ergonomic handle
- lock to prevent accidental opening of the tool
- durable, precise gear
- high-grade steel blade

S-67607	Ø 0 - 42 mm	1/6/36	pc

Al/Cu pipe cutter - mini



- aluminum body
- 2 steel rollers
- smooth adjustment of the cutting diameter
- pocket size
- for cutting Al/Cu/PVC pipes

S-67822	Ø 3 - 25 mm	1/12/72	pc

Al/Cu pipe cutter



- aluminum body
- 4 steel rollers
- smooth adjustment of the cutting diameter
- deburring knife
- for cutting Al/Cu/PVC pipes

S-67825	Ø 3 - 35 mm	1/6/36	pc

Pipe cutting wheel



- made of high quality steel
- Ø 18mm
- for cutting Al/Cu/PVC pipes
- for cutters S-67822, S-67825

S-67827	Ø 18 mm	1	pc

Automotive tools

Strap oil filter wrench

CrV



- simple mechanism – makes it easy to place the wrench on the oil filter
- tool made of high-quality CrV steel, allowing professional use without risk of damage
- steel strap with anti-slip inserts – ensures a secure grip on the oil filter

S011400070	110–155 mm	1/10/50	pc
S011400072	65–110 mm	1/25/50	pc

Strap oil filter wrench

CrV



- simple mechanism – makes it easy to place the wrench on the oil filter
- tool made of high-quality CrV steel, allowing professional use without risk of damage
- steel strap with anti-slip inserts – ensures a secure grip on the oil filter

S011400061	110–155 mm	1/10/50	pc

Oil filter pliers

CrV



- ergonomic handle – significantly increases working comfort
- non-slip jaws – ensure a secure grip on the oil filter
- the tool is made of high-quality CrV steel, allowing professional use without the risk of damage

S011400040	250 mm ; 60–90 mm	1/12/48	pc
S011400042	300 mm ; 60–120 mm	1/12/48	pc
S011400046	350 mm ; 60–140 mm	1/12/24	pc

Oil filter wrench



- includes a 3/8'' to 1/2'' adapter
- profiled jaws make access to the oil filter easier
- wrench made of high-quality tool steel

S011477001	43-102mm	1/20	pc

Oil filter wrench



- working range 64–100 mm
- 3/8'' to 1/2'' adapter
- flat profiled jaws make loosening filters easier
- three-arm design
- wrench made of high-grade tool stee

S011477002	64-100mm	1/20	pc

Oil filter wrench



- working range 64–120 mm
- includes a 3/8'' to 1/2'' adapter
- wrench made of high-grade tool steel
- knurled jaws

S011477003	64-120mm	1/20	pc

Oil filter socket



- fits many passenger car and motor-cycle brands

S011499001	76 mm, 12-point	1/10/60	pc
S011499002	65 mm, 14-point	1/10/60	pc
S011499003	67 mm, 14-point	1/10/60	pc
S011499004	73 mm, 14-point	1/10/60	pc
S011499005	76 mm, 14-point	1/10/60	pc
S011499006	74 mm, 15-point	1/10/60	pc
S011499007	78 mm, 15-point	1/10/60	pc
S011499008	80 mm, 15-point	1/10	pc
S011499009	90 mm, 15-point	1/10/60	pc
S011499010	95 mm, 15-point	1/10/60	pc
S011499011	108 mm, 15-point	1/10/60	pc
S011499012	86 mm, 16-point	1/10/60	pc
S011499013	86 mm, 18-point	1/10/60	pc
S011499014	96 mm, 18-point	1/10/60	pc

Oil filter locking pliers



- adjustment knob for smooth regulation
- specially profiled, serrated jaws
- secure and strong grip on the filter being removed

S011488000	50 – 118 mm	1/6/48	pc

11-Piece trim removal tool set



- pullers made of durable nylon, preventing scratches on removed components
- 11 pullers – ensure precise fit for each disassembled element
- practical fabric pouch – makes storage easy and allows hanging the entire set

S012200011	11 szt.	1/20	pc

STALCO



EQUIPMENT

Transport and storage

Workshop trolley with three shelves



- perforated walls allowing for hanging accessories
- solid construction made of thick sheet metal
- strong, solid handle
- large wheels
- wheels on the side of the handle with a brake
- anti-corrosion coating
- dimensions: 39 x 63 x 81 cm (length x width x height)

S-43060	maximum load capacity 130 kg maximum load per shelf: 43 kg	1	pc

Tool locker



- 7 drawers
- dimensions of the first 5 drawers: 565x395x60 mm (inside)
- dimensions of the last 2 drawers: 565x395x140 mm (inside)
- wheel lock
- lock
- ball guides
- solid handle
- spacious top with resistant covering
- perforated sides enabling the installation of accessories
- inside the drawers EVA lining

S-42252	max. pressure on the entire cabinet: 280 kg | max. unit pressure on shallow drawers: 30 kg | max. unit pressure on deep drawers: 35 kg | max. pressure on the upper tabletop: 60 kg	1	pc

Tool locker



- 7 drawers
- dimensions of the first 5 drawers: 565x395x60 mm (inside)
- dimensions of the last 2 drawers: 565x395x140 mm (inside)
- wheel lock
- lock
- ball guides
- drawer lock
- solid handle
- top made of stainless steel
- compartments on the top
- top perforated sides enabling the installation of accessories
- inside the drawers plastic lining EVA

S-42250	max. pressure on the entire cabinet: 300 kg | max. pressure on shallow drawers, individually: 30 kg | max. pressure on deep drawers, individual: 40 kg | max. pressure on the upper tabletop: 70 kg	1	pc

12-Drawer tool cabinet



- wheel lock
- swivel wheels
- lock
- EVA drawer lining
- sturdy handle
- spacious stainless steel-covered worktop
- perforated side panels for accessory mounting

S026300012	max. load on the entire cabinet: 610 kg | max. load per wide shallow drawer: 30 kg | max. load per wide deep drawer: 35 kg | max. load per narrow shallow drawer: 6 kg | max. load per narrow deep drawer: 8 kg | dimensions of the first 3 drawers (wide/narrow): 557 × 400 × 57 / 237 × 400 × 57 (internal) | dimensions of the last 3 drawers (wide/narrow): 557 × 400 × 138 / 237 × 400 × 138 (internal)	1	pc

Tool cabinet with side compartment



- wheel lock
- swivel wheels
- lock
- sturdy handle
- top with compartments suitable for storing tools and removed parts
- side storage compartment
- chemical storage container inside side compartment
- hooks for mounting inside side compartment for storing tools
- EVA drawer lining

S026300017	max. load on the entire cabinet: 300 kg | dimensions of the first 5 drawers: 565 × 395 × 60 mm (internal) | dimensions of the last 2 drawers: 565 × 395 × 140 mm (internal)	1	pc

Tool cabinet with 169-piece equipment



- S-42250: tool cabinet
- S-12646: PHILLIPS screwdriver set
- S-12648: FLAT screwdriver set
- S-12650: precision & striking screwdriver set
- S026390014: 1/4" socket set, 4–14 mm, 90T
- S026390038: 3/8" socket set, 6–24 mm, 90T
- S026390012: 1/2" socket set, 8–36 mm, 90T
- S026370622: offset ring spanner set 6–22 mm
- S026370619: combination spanner set 6–19 mm
- S026372032: combination spanner set 20–32 mm
- S026370000: Hex, Torx, Spline bit set with adaptors
- S026320000: tool set
- S026360002: plier set

S026399169	-	1	set

Tool cabinet with 165-piece equipment



- S-42252: tool cabinet
- S-12640: PHILLIPS screwdriver set
- S-12642: FLAT screwdriver set
- S-12644: precision & striking screwdriver set
- S026390014: 1/4" socket set, 4–14 mm
- S026390038: 3/8" socket set, 6–24 mm
- S026390012: 1/2" socket set, 8–36 mm
- S026360002: plier set
- S026370619: combination spanner set 6–19 mm
- S026372032: combination spanner set 20–32 mm
- S026370000: Hex, Torx, Spline bit set with adaptors
- S026360001: tool set
- S026320000: tool set

S026399165	-	1	set

Tool cabinet with side compartment and 178-piece equipment



- S026300017: tool cabinet with side compartment
- S-12640: PHILLIPS screwdriver set
- S-12642: FLAT screwdriver set
- S-12644: precision & striking screwdriver set
- S026390014: 1/4" socket set, 4–14 mm
- S026390038: 3/8" socket set, 6–24 mm
- S026390012: 1/2" socket set, 8–36 mm
- S026370622: offset ring spanner set 6–22 mm
- S026370619: combination spanner set 6–19 mm
- S026372032: combination spanner set 20–32 mm
- S026380821: deep socket set 1/2", 8–21 mm
- S026320000: tool set – hammer, punches, chisels
- S026370000: Hex, Torx, Spline bit set with adaptors

S026399178	-	1	set


12-Drawer tool cabinet with 207-piece equipment



- S026300012: 12-drawer tool cabinet
- S-12646: PHILLIPS screwdriver set
- S-12648: FLAT screwdriver set
- S-12650: precision & striking screwdriver set
- S026390014: 1/4" socket set, 4–14 mm
- S026390038: 3/8" socket set, 6–24 mm
- S026390012: 1/2" socket set, 8–36 mm
- S026370622: offset ring spanner set 6–22 mm
- S026370619: combination spanner set 6–19 mm
- S026372032: combination spanner set 20–32 mm
- S026370000: Hex, Torx, Spline bit set with adaptors
- S026320000: tool set – hammer, punches, chisels
- S026360002: plier set
- S026360001: circlip plier set
- S026381024: impact socket set 1/2", 10–24 mm
- S026380821: deep socket set 1/2", 8–21 mm

S026399207	-	1	set

31-Piece tap and die set



- dies: M3, M4, M5, M6, M8, M10, M12
- taps: 3×(M3×0.5; M4×0.7; M5×0.8; M6×1.0; M8×1.25; M10×1.5; M12×1.75)

S026340010	-	1/10	set

Phillips screwdrivers set 6 pcs. - Eva insert

CrV



- 6 x PH: PH0x75, PH1x100, PH2x38,PH2x100, PH2x150, PH3x150 mm

S-12640	-	1/3/12	set

Flat screwdrivers 6 pcs. - Eva insert

CrV



- 6 x SL: 3x75, 4x100, 5x100, 6x38, 6x150, 8x150 mm

S-12642	-	1/3/12	set

Punching and precision screwdrivers, 9 pcs. - Eva insert

CrV



- punching screwdrivers: 2 x SL: 6x100 mm,8x150 mm, 2 x PH: PH2x100 mm, PH3x150 mm, precision screwdrivers: 2 x SL: 2.0x50 mm,3.0x50 mm, 3 x PH: PH00x50 mm, PH0x50 mm, PH1x50 mm

S-12644	-	1/3/12	set

Phillips screwdrivers 6 pcs. - Eva insert

S2



- 6 x PH: PH0x75, PH1x100, PH2x38, PH2x100, PH2x150, PH3x150 mm

S-12646	-	1/3/12	set

Flat screwdrivers 6 pcs. - Eva insert

S2



- 6 x SL: 3x75, 4x100, 5x100, 6x38, 6x150, 8x150 mm

S-12648	-	1/3/12	set

Punching and precision screwdrivers, 9 pcs. - Eva insert

S2



- punching screwdrivers: 2 x SL: 6x150 mm, 8x200 mm, 2 x PH: PH2x150 mm, PH3x200 mm
- precision screwdrivers: 2 x SL: 2.0x5 0mm, 3.0x50 mm 3 x PH: PH00x50 mm; PH0x50 mm; PH1x50 mm

S-12650	-	1/3/12	set

Set of deep sockets 14 pcs. - Eva insert

CrV



- 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21 mm

S026380821	1/2" | 8-21mm	1/10	set

Set of 14-piece combination wrenches. - Eva insert

CrV



- 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm

S026370619	6-19mm	1/10	set

Set of impact sockets 20 pcs. - Eva insert

CrV



- crV steel
- deep CrMo impact sockets: 10, 12, 13, 14, 16, 17, 19, 21, 22, 24 mm
- crMo impact sockets: 10, 12, 13, 14, 16, 17, 19, 21, 22, 24 mm

S026381024	1/2" | 10-24mm	1/6	set

Set of 8-piece curved ring spanners. - Eva insert

CrV



S026370622	6-22mm	1/10	set

Torx bit set – 18 pcs – EVA insert



- TORX bits: T20, T25, T27, T30, T40, T45, T50, T55, T60
- TORX sockets: E10, E11, E12, E14, E16, E18, E20, E22, E24

S026388805	-	10/360	set

Set of 8-piece combination wrenches. - Eva insert

CrV



- 20, 21, 22, 24, 27, 29, 30, 32 mm

S026372032	20-32mm	1/6	set

Hex bit set – 9 pcs – EVA insert



- HEX S2: H4, H5, H6, H7, H8, H10, H12, H14, H17

S026388807	-	10/360	set

Set of bits with adapters 40 pcs. - Eva insert

S2



- bits with adapters made of S2 steel:
- 30 mm: T20, T25, T30, T40, T45,T50, T55
- 75 mm: T20, T25, T30, T40, T45,T50, T55
- 30 mm: M5, M6, M8, M10, M12
- 75 mm: M5, M6, M8, M10, M12
- 30 mm: H4, H5, H6, H7, H8, H10, H12
- 75 mm: H4, H5, H6, H7, H8, H10, H12
- steel bit adapters CRV: 10 mm 3/8", 10 mm 1/2"

S026370000	-	1/10	pc

1/4" Socket set – 53 pcs – EVA insert



- bits on 1/4" sockets: PH1, PH2, PH3, PZ1, PZ2, PZ3, H3, H4, H5, H6, H7, H8, SL4, SL5.5, SL7, TX10, TX15, TX20, TX25, TX27, TX30, TX40
- 90T ratchet
- 1/4" socket and bit driver
- TORX sockets: E4, E5, E6, E7, E8
- 1/4" sockets: 4, 4.5, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14 mm
- 1/4" deep sockets: 7, 8, 9, 10, 11, 12, 13, 14 mm
- universal joint
- 1/4" extensions: 75 mm, 150 mm

S026388808	-	10/360	set

Set of ring pliers 4 pcs. - Eva insert



- for seger rings:
- 180 mm internal straight
- 180 mm external straight
- 180 mm external bent
- 180 mm internal bent

S026360001	-	1/10	pc

27-Piece socket wrench set – EVA insert



- 20 × 1/2" CrV sockets: 8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24, 27, 30, 32, 34, 36 mm
- 1 × extension: 125 mm
- 1 × sliding T-handle
- 1 × 1/2" × 3/8" adaptor
- 1 × 1/2" ratchet, 90T
- 1 × spark plug socket: 16 mm, 21 mm
- 1 × 1/2" universal joint

S026391290	1/2˝ | ratchet 90T	1/6	set

Tool set - hammer, punches, cutters 5 pcs. - Eva insert



- hammer 300 g
- chisels: 10x8x142 mm, 12x10x150 mm
- center punches: 6x10x102 mm, 8x11x115 mm

S026320000	-	1/10	pc

19-Piece socket wrench set – EVA insert



- 13 × 1/4" CrV sockets: 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14 mm
- 1 × sliding T-handle
- 2 × extensions: 50, 100 mm
- 1 × universal joint
- 1 × 1/4" flexible extension
- 1 × 1/4" ratchet, 90T

S026391490	1/4˝| ratchet 90T	1/10	set

Set of pliers 5 pcs. - Eva insert



- combination pliers 180 mm
- side cutting pliers 160 mm
- side cutting pliers 110 mm
- straight extended pliers 130 mm
- straight extended pliers 160 mm

S026360002	-	1/10	pc

22-Piece socket wrench set – EVA insert



- 18 × 3/8" CrV sockets: 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24 mm
- 1 × 3/8" universal joint
- 1 × 3/8" sliding T-handle
- 1 × 3/8" extension, 75 mm
- 1 × 3/8" ratchet, 90T

S026393890	3/8˝; ratchet 90T	1/10	set

27-Piece socket wrench set – EVA insert



- 20 × 1/2" CrV sockets: 8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24, 27, 30, 32, 34, 36 mm
- 1 × extension: 125 mm
- 1 × sliding T-handle
- 1 × 1/2" × 3/8" adaptor
- 1 × 1/2" ratchet, 72T
- 1 × spark plug socket: 16 mm, 21 mm
- 1 × 1/2" universal joint

S026391272	1/2˝; ratchet 72T	1/6	set

6-Piece joint puller – EVA insert



- high-quality tool steel – ensures failure-free operation
- several puller models included – enables removal of most joints and rod ends
- EVA foam insert – fits all STALCO tool cabinets

S026388810	-	1/5	set

19-Piece socket wrench set – EVA insert



- 13 × 1/4" CrV sockets: 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14 mm
- 1 × sliding T-handle
- 2 × extensions: 50, 100 mm
- 1 × universal joint
- 1 × 1/4" flexible extension
- 1 × 1/4" ratchet, 72T

S026391472	1/4˝| ratchet 72T	1/10	set

Rivet gun with rivet set – EVA insert



- extended set – rivet gun with 5 different types of rivets, 15 pcs each, allows making riveted joints for most mechanical and metalworking tasks
- rivet material: aluminium–steel
- EVA insert – suitable for storage in all STALCO tool cabinets

S026388812	Ø3,2 x 9,6 mm, Ø4,0 x 9,6 mm, Ø4,0 x 12,7 mm, Ø4,8 x 9,6 mm , Ø4,8 x 12,7 mm	1/12	set

22-Piece socket wrench set – EVA insert



- 18 × 3/8" CrV sockets: 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24 mm
- 1 × 3/8" universal joint
- 1 × 3/8" sliding T-handle
- 1 × 3/8" extension: 75 mm
- 1 × 3/8" ratchet, 72T

S026393872	3/8˝| ratchet 72T	1/10	set

Pipe wrench plier set – EVA insert



- three sizes of pliers – allow adapting the tool to the material being gripped
- pliers made of CrV steel
- polypropylene handles
- high-hardened jaws – provide a secure grip
- anti-corrosion coating – protects the tool from rust
- insert compatible with all Stalco cabinets

S026388815	300, 250, 180 mm	1/10	set

Locking pliers set



- latch mechanism – allows quick and very strong clamping
- adjusting screw – enables fast and precise jaw adjustment to the thickness of the material being held
- anti-corrosion coating – protects the surface of the tool from rust

S026388811	-	1/10	set

Plastic toolbox



- ergonomic plastic handle
- two transparent organizers built into the lid
- PVC clip
- pull-out shelf
- load capacity 9 kg

S-47532	360x195x183 mm ; 14” ; plastic	1	pc

Plastic toolbox



- ergonomic plastic handle
- two transparent organizers built into the lid
- durable clasp made of two-component para plastic and elastomer
- pull-out shelf
- load capacity 13 kg

S-47534	470x256x238 mm ; 19" ; plastic	1	pc

Tool bag



TNS16
- made from durable 600 D polyester, guaranteeing the bag's long-lasting durability
- 6 external pockets for storing smaller tools
- the adjustable shoulder strap can be adjusted to suit your needs from 60 cm
- up to 122 cm
- double reinforced zipper stitching and a durable zipper
- carrying handle for easy transport
- the bag is made of sturdy polyester
- number of internal pockets: 10
- number of external pockets: 12

S-42205	one size ; 40x22x29 cm	1/10	pc

Tool bag



TNS30
- additionally reinforced bottom for high stability and durability
- strong and resistant polyester fabric
- designed for the storage and transport of tools
- soft, comfortable, adjustable, removable shoulder strap
- strap adjustable from 60 cm to 122 cm
- reinforced bottom
- sturdy aluminium handle with non-slip grip
- 11 pockets on the outside
- quick access to tools

S-42207	one size ; 40x20x30 cm	1/6	pc

Tool backpack



PNS20
- made from durable 600 D polyester, guaranteeing the bag's long-lasting durability
- 3 hand grips
- 16 internal pockets
- removable tool tray for easier work
- reflective elements
- special plastic rubber reinforcements on the underside

S-42209	one size ; 46x22x35 cm	1/4	pc

Tool belt



PNS10
- made from durable 600 D polyester, guaranteeing the bag's long-lasting durability
- has a padded, ergonomic belt for improved comfort during work
- 11 external pockets
- 14 handles

S-42211	one size ; 115 cm	1/5	pc

Stowage belt



- two-piece, made of a weave of polyester fibers
- abrasion resistant, UV and moisture
- strong painted double hook of carbon steel
- massive ratchet buckle, made of galvanized carbon steel
- plastic coated handle for improved comfort

S-47840	50 mm x 8 m	1/6	pc

Stowage belts



- two-piece, made of a weave of polyester fibers
- abrasion resistant, UV and moisture
- strong painted hook of carbon steel
- massive ratchet buckle, made of galvanized carbon steel
- plastic coated handle
- set of 4

S-47842	25 mm x 4.5 m ; 700 kg	1/8	pc

Stowage belt



- two-piece, made of a weave of polyester fibers
- abrasion resistant, UV and moisture
- strong painted hook of carbon steel
- massive ratchet buckle, made of galvanized carbon steel
- plastic coated handle

S-47844	38 mm x 5 m	1/10	pc

Stowage belts



- polypropylene tape
- aluminum buckles
- set of 2

S-47846	25 mm x 2.5 m ; 200 kg	1/50/100	pc

Stowage belt



- polypropylene tape
- ratchet buckle made of carbon steel, galvanized

S-47848	25 mm x 5 m ; 300 kg	1/20/40	pc

Tow tape



- made of high quality material
- resistant to abrasion, UV and moisture
- strong metal hooks with lock
- case for storage and transport

S-47834	4 m x 50 mm; 2000 kg	1/20	pc
S-47836	4 m x 50 mm; 3000 kg	1/20	pc

Flexible cord



- core made of a weave of individual latex rubbers
- metal hooks of steel wire

S-47830	Ø10 mm x 80 cm	1/50/100	pc

Flexible tape



- core made of a weave of individual latex rubbers
- plastic hooks

S-47832	16 mm x 80 cm	1/100/200	pc

Impregnated tarpaulin




- PE tarpaulin made of polypropylene
- effectively protects against rain, sun and wind

S-47635	3 x 5 m	1/12	pc
S-47646	4 x 6 m	1/8	pc
S-47658	5 x 8 m	1/5	pc

Ladders

Domestic ladder 120 kg



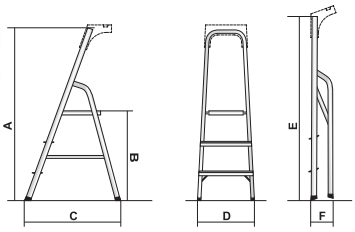


	A	B	C	D	E	F
S-40511	1200	600	640	410	1253	120
S-40514	1410	810	720	430	1483	120
S-40517	1620	1020	940	460	1713	120
S-40520	1830	1230	1090	480	1943	120

- maximum load: 120 kg
- stringers in the upper part form a convenient handrail
- stable platform 25cm: x: 25cm
- non-slip ribbing on the platform
- plastic feet
- wide steps

S-40511	3 steps	1	pc
S-40514	4 steps	1	pc
S-40517	5 steps	1	pc
S-40520	6 steps	1	pc

Sided domestic ladder 15 kg






	A	B	C	D	E
S-40525	350	170	450	420	400
S-40527	370	170	670	640	610

- maximum load: 150 kg
- wide, non-slip steps
- plastic feet

S-40525	2 x 2 steps	1	pc
S-40527	2 x 3 steps	1	pc

Domestic ladder 150 kg






	A	B	C	D	E	F
S-40531	1175	565	610	405	1253	120
S-40534	1396	780	765	430	1483	120
S-40537	1617	995	920	455	1713	120
S-40540	1837	1210	1075	479	1943	120
S-40543	2058	1425	1230	503	2173	120
S-40546	2279	1640	1385	528	2403	120

- made in accordance with EN 131
- maximum load: 150 kg
- stringers in the upper part form a convenient handrail
- stable platform 25cm x 25cm
- non-slip ribbing on the platform
- plastic feet
- wide steps

S-40531	3 steps	1	pc
S-40534	4 steps	1	pc
S-40537	5 steps	1	pc
S-40540	6 steps	1	pc
S-40543	7 steps	1	pc
S-40546	8 steps	1	pc

Painting wooden ladder





	A	B	C	D	E
S-40588	510	130	1320	910	1300
S-40591	550	130	1590	1000	1500
S-40594	580	130	1850	1150	1800
S-40597	620	130	2120	1280	2000
S-40600	660	130	2370	1400	2240

- made of knotless pine wood
- professional hinges with a hook to hang the bucket
- reinforced by steel bars
- 3rd step made of hard beech wood

S-40588	2 x 4 steps	1	pc
S-40591	2 x 5 steps	1	pc
S-40594	2 x 6 steps	1	pc
S-40597	2 x 7 steps	1	pc
S-40600	2 x 8 steps	1	pc
S-40603	2 x 9 steps	1	pc
S-40606	2 x 10 steps	1	pc

Multipurpose ladder



- made in accordance with EN 131
- maximum load: 150 kg
- stable platform with non-slip ribbing
- non-slip plastic feet

S-40230	11.5 kg	1	pc

Telescopic ladder




- made in accordance with EN 131
- maximum load: 150 kg
- non-slip rubber feet
- tape securing the ladder against unfolding
- compact size

S-40614	11 steps	1	pc

Industrial ladder 150 kg



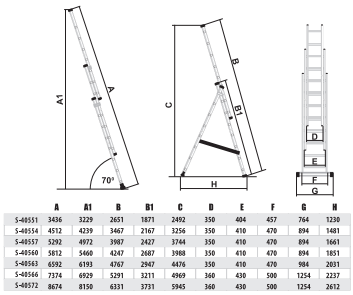

	A	A1	B	B1	C	D	E	F	G	H
S-40551	3436	3229	2651	1871	2492	350	404	457	764	1230
S-40554	4512	4239	3467	2167	3256	350	410	470	894	1481
S-40557	5392	4972	3987	2427	3744	350	410	470	894	1661
S-40560	5812	5460	4247	2687	3988	350	410	470	894	1851
S-40563	6592	6193	4767	2947	4476	350	410	470	984	2031
S-40566	7374	6929	5291	3211	4969	360	430	500	1254	2237
S-40572	8674	8150	6331	3731	5945	360	430	500	1254	2612

- "made in accordance with EN 131
- maximum load: 150 kg
- stroke limiter
- plastic feet"

S-40551	3 elements x 7 steps	1	pc
S-40554	3 elements x 8 steps	1	pc
S-40557	3 elements x 9 steps	1	pc
S-40560	3 elements x 10 steps	1	pc
S-40563	3 elements x 11 steps	1	pc
S-40566	3 elements x 12 steps	1	pc
S-40572	3 elements x 14 steps	1	pc

Articles for pneumatics

Spray gun



- air consumption - 200 l/min
- nozzle size: Ø1.5 mm
- flow regulation
- tank 600 ml
- air pressure - 3 Bar
- quick coupling 1/4”

S-58408	upper tank	1/20	pc

Spray gun



- air consumption - 200 l/min
- nozzle size: Ø1.5 mm
- flow regulation
- tank 1000 ml
- air pressure - 3 Bar
- quick coupling 1/4”

S-58416	lower tank	1/20	pc

Spray gun



- air consumption - 140 l/min
- nozzle size: Ø0.5 mm
- flow regulation
- tank 100 ml
- air pressure - 3 Bar
- quick coupling 1/4”

S-58424		1/20	pc

Washing gun



- nozzle size: Ø2.0 mm
- tank 1000 ml
- quick coupling 1/4”

S-58432	lower tank	1/2/12	set

Blow gun



- quick coupling 1/4”

S-58448	short tip	1/25/100	pc
S-58456	long tip	1/25/100	pc

Tyre-inflating gun



- pressure measurement: 0-12 Bar
- hose length 400 mm
- quick coupling 1/4”

S-58440	0 - 12 Bar	1/10/40	pc

Paint kit



- pneumatic tube 5m
- quick coupling 1/4”
- spray gun
- dispenser gun
- tire inflating gun
- air blow gun

S-58705	5 el.	1/10	set

Air line



- max. operating pressure: 8 Bar
- quick coupling 1/4”

S-58610	10 m	1/50	pc
S-58615	15 m	1/25	pc
S-58620	20 m	1/25	pc

Extension cords and wiring accessories

Booster cables



S-47764	400A / 2.5 m	1/10	pc

Single-socket extension cord



▪ single-socket extension cord for domestic use

S-46620	10m, IP44; 16A;3680 W; H05RR-F 3x1,5 mm²	1/10	pc
S-46623	20m, IP44;16A;3 680W; H05RR-F 3x1,5 mm²	1/5	pc
S-46625	30m, IP44; 16A;368 0 W; H05RR-F 3x1,5 mm²	1/5	pc
S-46627	40m, IP44; 16A;3680 W; H05RR-F 3x1,5 mm²	1/3	pc

Drum extension cord



▪ extension cord for industrial and construction

S-46600	20m, IP44;16A/3680W; 3X1,5 mm²	1	pc
S-46603	25m, IP44;16A/3680W; 3X1,5 mm²	1	pc
S-46605	30m, IP44;16A/3680W; 3X1,5 mm²	1	pc
S-46607	50m, IP44;16A/3680W; 3X1,5 mm²	1	pc

Safety devices

Cast iron padlock



▪ hardened shackle

S024110132	32 mm	1/6/240	pc
S024110138	38 mm	1/6/144	pc
S024110150	50 mm	1/6/72	pc
S024110163	63 mm	1/6/48	pc
S024110175	75 mm	1/6/36	pc

Brass padlock



▪ hardened shackle

S024110230	30 mm	1/12/240	pc
S024110240	40 mm	1/12/120	pc
S024110250	50 mm	1/6/60	pc
S024110260	60 mm	1/6/60	pc

Brass spindle lock



▪ hardened pin

S024120250	50 mm	1/6/60	pc
S024120260	60 mm	1/6/60	pc
S024120270	70 mm	1/6/36	pc
S024120290	90 mm	1/6/24	pc

Articles for cleaning

House broom



- beech wood bristles holder
- threaded hole for handle
- PET bristles Ø0,25mm x 55mm
- compatible with handles S-47776 & S-47778

S-47744	300 mm	1/30	pc
S-47746	350 mm	1/28	pc
S-47748	400 mm	1/24	pc

Industrial broom



- beech wood bristles holder
- plastic handle grip
- PET bristles Ø0,25mm x 55mm
- compatible with handle S-47774

S-47750	500 mm	1/10	pc
S-47752	600 mm	1/10	pc
S-47754	800 mm	1/10	pc

Universal scrub broom



- beech wood bristles holder
- threaded handle grip made of galvanized steel
- PET bristles Ø0,80mm x 55mm
- compatible with handle S-47774

S-47758	220 mm	1/12	pc

Scrub brush



- ergonomic beech wood bristles holder
- PET bristles Ø0,50 mm x 25 mm

S-47760	215 mm	1/10	pc
S-47761	215 mm	1/10	pc

Street broom



- beech wood bristles holder
- plastic handle grip
- PET bristles Ø0.9mm x 55mm
- compatible with handle S-47774

S-47730	300 mm	1/10	pc
S-47732	400 mm	1/10	pc
S-47734	500 mm	1/10	pc
S-47736	600 mm	1/10	pc
S-47738	800 mm	1/10	pc

Street broom with scraper



- beech wood bristles holder
- scraper made of galvanized steel with handle grip
- PET bristles Ø0,9mm x 67mm
- compatible with handle S-47774

S-47740	400 mm	1/10	pc

Street broom with long bristles



- beech wood bristles holder
- threaded hole for handle
- PET bristles Ø1,0mm x 135mm
- compatible with handles S-47776 & S-47778

S-47742	240 mm	1/25	pc

Tar brush



- designed for liquid and viscous substances such as tar or glue
- can be used with S-47774 broom-stick Ø23

S-47763	170 mm	1/50	pc

Broom for grass mower



- beech wood bristles holder
- handle with hole
- plastic scraper
- PET bristles 30mm

S-47770	315 mm	1/15	pc

Broom for sett



- beech wood bristles holder & handle
- scraper made of thick galvanized steel
- steel wire bristles Ø0,4mm x 35mm

S-47772	Ø0,4 x 35 mm	1/10	pc

Broom handle



- beech wood
- hole for hanging

S-47774	23 x 1400 mm	1/10	pc
S-47776	22 x 1200 mm	1/10	pc
S-47778	22 x 1200 mm	1/25	pc
S-47779	28 x 1400 mm	1/10	pc

Broom



- beech wood bristles holder
- handle with hole for hanging
- PET bristles Ø0,25mm x 55mm

S-47756	280 mm	1/64	pc

Metal scoop



- powder coated
- beech wood handle

S-47781	520 x 225 mm	1/5	pc

Rubble sacks



- made from 100% recycled LDPE plastic
- high tear strength

S-47695	60 L; 60 x 80 cm; 10 pcs.	1/4	set
S-47696	120 L; 70 x 110 cm; 10 pcs.	1/4	set

Trash bags



- made from 100% recycled LDPE plastic
- tear strength

S-47690	120 L; 70 x 110 cm; 20 pcs.	1/4	set
S-47688	300 L; 100 x 150 cm ; pack of 5 pcs.	1/4	set
S-47692	160 L; 91 x 110 cm; 10 pcs.	1/4	set
S-47694	240 L; 120 x 150 cm; 10 pcs.	1/4	set

STALCO
PERFECT



EQUIPMENT

Transport and storage

Tool cabinet – 7 drawers



- lock with two folding keys and PERFECT key fob
- 7 drawers:
- – 6 shallow drawers, 74.5 mm high
- – 1 deep drawer, 205.5 mm high
- drawer locking system – prevents more than one drawer from being opened at the same time
- drawer handles with aluminum finish
- heavy-duty handle – made of metal, powder-coated
- worktop made of plastic
- 6 compartments on the top work surface
- perforated side panels for mounting accessories
- drawer liners with PERFECT logo inside
- 4 heavy-duty wheels, including two swivel casters with brake

S026300999	load capacity: shallow drawer: 50 kg / deep drawer: 75 kg / worktop: 625 kg / total: 1000 kg | dimensions: height with casters: 1001 mm / height without casters: 836 mm / width with handle: 778 mm / width without handle: 702 mm / depth: 477 mm | side panel perforation: holes spaced every 25.4 mm / hole diameter: 6.2 mm	1	pc

Waste bin for the tool cabinet



S026300020	-	1/4	pc

Tool container for tool cabinet



- made of metal
- powder-coated for maximum durability
- allows storing tools, small components, or using it as a waste container
- mounting hooks enable installation on perforated tool cabinet panels
- soft inner lining ensures safe storage of tools
- compatible with the Stalco Perfect tool cabinet S026300999

S026300092	-	1/5	pc

Paper holder for a tool cabinet



S026300010	-	1/10	pc

Single hook



- made of metal
- powder-coated for maximum durability
- allows hanging tools such as combination spanners, screwdrivers, and others
- mounting hooks enable installation on perforated tool cabinet panels
- compatible with the Stalco Perfect tool cabinet S026300999

S026300081	-	1/12/120	pc

Double hook



- made of metal
- powder-coated for maximum durability
- allows hanging tools such as combination spanners, screwdrivers, and others
- mounting hooks enable installation on perforated tool cabinet panels
- compatible with the Stalco Perfect tool cabinet S026300999

S026300082	-	1/12/120	pc

Paper holder for tool cabinet



- made of metal
- powder-coated for maximum durability
- allows hanging a paper towel roll up to 300 mm wide
- two side screws prevent the roll from slipping off the holder
- four mounting screws included
- compatible with the Stalco Perfect tool cabinet S026300999

S026300090	-	1/10	pc

Round magnetic tray



- magnet with plastic cover – prevents scratches
- made of stainless steel – prevents corrosion
- helps store and secure removed component

S026111110	Ø 100mm	1/12/48	pc
S026111115	-	1/12/48	pc

Rectangular magnetic tray



- magnet with plastic cover – prevents scratches
- made of stainless steel – prevents corrosion
- helps store and secure removed component

S026111199	245 x 145mm	1/12/24	pc

Tool box



- multifunction toolbox
- body made of high strength polymer blend
- large organizer with compartments and a durable polycarbonate lid
- durable, ergonomic aluminum handle
- internal functional carrier
- durable galvanized steel latches

S-76611	548x274x286 mm ; 22”	1	pc

Tool box



- multifunction toolbox
- body made of high strength polymer blend
- large organizer with compartments and a durable polycarbonate lid
- durable, ergonomic aluminum handle
- internal functional carrier
- durable galvanized steel latches

S-76613	594x288x308 mm ; 25”	1	pc

Tool bag



TNP10L
- double reinforced seam
- robust, solid wheels
- carrying handle
- reinforced, robust material - polyester
- 11 external pockets
- reflective elements
- durable handles reinforced with rivets
- 6 internal pockets
- reinforced, telescopic handle with locking device for towing the bag
- rigid construction
- durable lock

S-76262	49 x 30 x 44 cm	1/2	pc

Tool bag



TNP10M
- double reinforced seam
- carrying handle
- 11 external pockets
- reinforced, robust material - polyester
- durable lock
- 6 internal pockets
- reflective elements
- rigid construction
- durable handles reinforced with rivets

S-76264	42 x 21 x 24 cm	1/4	pc

Tool bag



TNP10S
- 11 external pockets
- carrying handle
- double reinforced seam
- reinforced, robust material - polyester
- durable lock
- 6 internal pockets
- rigid construction
- reflective elements
- durable, reinforced handles

S-76266	37 x 19 x 22 cm	1/6	pc

Tool bag



TNP16
- carrying handle
- double reinforced seam
- 11 external pockets
- tool clamp
- reflective elements
- reinforced plastic base
- adjustable strap
- reinforced, robust material - polyester
- rigid construction
- 8 internal pockets
- carabiner for tools

S-76268	40 x 22 x 34 cm	1/6	pc

Tool bag



TNP18
- double reinforced seam
- pocket for ID badge and screwdrivers
- carrying handle
- reinforced plastic base
- 10 external pockets
- durable lock
- strong snap hook
- 9 internal pockets
- rigid construction
- reflective elements
- adjustable strap

S-76270	43 x 30 x 30 cm	1/2	pc

Tool bag



TNP32
- profiled handle
- covered with soft foam
- strong locks
- window for ID badge
- bottom reinforced with two rails
- tool clamp
- reinforced, robust material - polyester
- 9 external pockets
- 32 inside pockets
- measuring tape clip
- rigid construction
- reflective elements

S-76272	51 x 25 x 32 cm	1/4	pc

Tool bag



TNP20
- soft foam-covered contoured handle
- strong locks
- window for ID badge
- tool holder
- 5 rubber non-slip feet
- buckle and carabiner for tools
- 2 spacious main compartments
- reinforced, robust material - polyester
- measuring tape clip
- reflective elements
- rigid construction
- 32 inside pockets
- 12 external pockets

S-76276	49 x 28 x 46 cm	1/2	pc

Tool bag



TNP22
- rigid construction
- reinforced, robust material - polyester
- two zipped pockets for documents
- dedicated spanner holders
- dedicated screwdriver holder
- 17 internal pockets
- dedicated holders for pliers and other tools
- reflective elements
- carrying handle
- adjustable strap
- removable main compartment divider
- safety bases
- 7 external pockets
- strong locks

S-76278	42 x 22 x 32 cm	1/8	pc

Tool bag



TNP34
- window for ID badge
- carrying handle
- reflective elements
- 31 internal pockets
- 15 external pockets
- functional bit pocket
- reinforced plastic bottom
- functional partition
- strong snap hook
- adjustable strap
- measuring tape clip
- rigid construction

S-76280	28 x 28 x 38 cm	1/4	pc

Tool belt



PNP20
- multifunctional case
- adjustable strap
- ergonomic, breathable belt
- hammer pocket
- holster
- large zipped pocket
- leather strap
- metal rivets
- bottom reinforced with PVC
- reflective elements
- reinforced, robust material

S-76286	[cm] 32 x 24 x 16: 15 x 13 x 5.5 30 x 16 x 5 Belt: 140	1/12	pc

Shoulder tool bag



TNP24
- adjustable shoulder strap
- reflective elements
- durable locks
- 7 external pockets
- reinforced, robust material - polyester
- spacious main compartment
- rigid construction
- key clip

S-76282	31 x 35 x 9 cm	1/30	pc

Tool backpack



PNP28
- carrying handle
- 4 external pockets
- adjustable, detachable straps
- reinforced, robust material - polyester
- reflective elements
- laptop pocket

S-76260	50 x 29,5 x 19 cm	1/6	pc

Tool pouch



TNP26
- 3 inside pockets
- durable locks
- 2 capacious main compartments
- reinforced, robust material - polyester
- reflective elements
- adjustable strap
- 1 external pocket

S-76284	36 x 14 x 8 cm	1/70	pc

Leather belt



P10

S-76298	105 cm	1/100	pc
S-76300	115 cm	1/100	pc
S-76302	125 cm	1/100	pc

Tool pocket



KNP10

S-76288	17 x 30 x 6 cm	1/32	pc

Tool pocket



KNP12

S-76290	32 x 24 x 16 cm	1/16	pc

Tool pocket



KNP14

S-76292	32 x 21,5 x 8 cm	1/20	pc

Tool pocket



KNP16

S-76294	26 x 19 x 7 cm	1/72	pc

Hammer pocket




KNP30

S-76296	15 x 13 x 5,5 cm	1/72	pc

Ladders

Mini slim folding ladder




	A	B	C	D	E
S020140402	440	480	650	720	550
S020140502	440	480	820	900	550
S020140503	660	640	1040	1140	550



- wide aluminum profile
- models with handle – additional stability and safety
- durability – ladder meets safety standards with a maximum load capacity of 150 kg
- compact dimensions – only 5.5 cm thick when folded
- practical platform – wide platform ensures stability and comfort while working at height
- aluminum construction – made of lightweight yet highly durable rectangular-profile aluminum, extremely resistant to mechanical damage and weather conditions

S020140402	408 x 485 x 653 mm; 2 steps, with no handle	1/6	pc
S020140502	408 x 485 x 825 mm; 2 steps, with handle	1/6	pc
S020140503	408 x 638 x 1045 mm; 3 steps, with handle	1/6	pc

Slim folding ladder



	A	B	C	D	E
S020140512	680	750	1290	1400	550
S020140513	910	920	1510	1660	550




- wide aluminum profile
- models with handle – additional stability and safety
- durability – ladder meets safety standards with a maximum load capacity of 150 kg
- compact dimensions – only 5.5 cm thick when folded
- practical platform – wide platform ensures stability and comfort while working at height
- aluminum construction – made of lightweight yet highly durable rectangular-profile aluminum, extremely resistant to mechanical damage and weather conditions

S020140512	1287 x 466 x 750 mm; 3 steps, with handle	1/4	pc
S020140513	1515 x 466 x 921 mm; 4 steps, with handle	1/3	pc

Slim ladder with wood-pattern finish





A	B	C	D	E
440	700	850	910	550

- safety and functionality – ideal for everyday tasks at height. Despite its slim structure, the ladder supports up to 150 kg
- practical design – simple and quick folding system ensures convenient, compact storage
- versatility – additional seating function works well in many daily situations
- elegant stand – can also serve as a decorative plant or ornament shelf

S020140413	460 x 700 x 850 mm	1/6	pc

Articles for pneumatics

Technical hose



- operating temperature range: -10°C to +45°C
- maximum pressure: 65 bar
- colorless slug
- 3-layer
- resistant to mechanical damage
- tight for liquids and gases
- UV-resistant
- resistant to lyes and acids
- contains no cadmium, barium or lead

S-73681	6 x 2.5 mm x 25 mb	1	pc
S-73682	6 x 2.5 mm x 50 mb	1	pc
S-73683	8 x 2.5 mm x 25 mb	1	pc
S-73684	8 x 2.5 mm x 50 mb	1	pc
S-73685	10 x 2.5 mm x 25 mb	1	pc
S-73686	10 x 2.5 mm x 50 mb	1	pc
S-73687	12.5 x 3.0 mm x 25 mb	1	pc
S-73688	12.5 x 3.0 mm x 50 mb	1	pc
S-73689	16 x 3.0 mm x 25 mb	1	pc
S-73690	16 x 3.0 mm x 50 mb	1	pc
S-73691	19 x 3.0 mm x 25 mb	1	pc
S-73692	19 x 3.0 mm x 50 mb	1	pc
S-73693	25 x 4.0 mm x 25 mb	1	pc
S-73694	25 x 4.0 mm x 50 mb	1	pc

Extension cords and wiring accessories

Heavy line specialist drum extension cord



- Dedicated to construction sites and industry

S-75700	30m, IP-44 4x2p+Z, 16A, 3680W, 3x2.5mm H05RR-F-BLACK	1	pc
S-75702	40m, IP-44 4x2p+Z, 16A, 3680W, 3x2.5mm H05RR-F-BLACK	1	pc
S-75704	50m, IP-44 4x2p+Z, 16A, 3680W, 3x2.5mm H05RR-F-BLACK	1	pc

Articles for cleaning

Vehicle wash sponge



WS CAR
- soft, safe for varnish

S-64569	22x10.5 x 6.8 cm	1/100	pc

Microfiber towel



TTB CAR 40/40
- microfibre technology 250 g/m²
- attracts dust well when dry
- wet absorbs water and dirt perfectly
- after rinsing with water, i mmedia-tely ready for re-use

S-64566	40x40 cm, 250 g/m², material: microfiber	1/200	pc

Microfiber towel



TTY CAR 40/40
- microfibre technology 400 g/m²
- attracts dust well when dry
- wet absorbs water and dirt perfectly
- after rinsing with water, immedia-tely ready for re-use

S-64567	40x40 cm, 400 g/m², material: microfiber	1/200	pc

Microfiber towel



TTW CAR 60/90
- very absorbent towel
- 400 g/m² microfibre technology

S-64568	60x90 cm, 400 g/m², material: microfiber	1/1	pc

Jacks

Hydraulic post lift



- central regulation
- solid, welded, uniform structure ensuring tightness
- double sealing of the cylinder

S-42280	2,000 kg | 181-344 mm	1/6	pc
S-42282	3,000kg | 193-373mm	1/6	pc
S-42284	5,000 kg | 210-416 mm	1/4	pc
S-42286	8,000 kg | 230-460mm	1/4	pc
S-42288	12,000 kg |230-440 mm	1/4	pc
S-42290	20,000 kg | 242-452mm	1/2	pc

Car stands



- safe height lock
- made of durable, high-quality steel
- covered with an anti-corrosion layer

S-43050	2000kg | 278-420mm	1	pc
S-43052	3000kg | 285-425mm	1	pc
S-43054	6000 kg | 390-605 mm	1	pc

Hydraulic low profile lift



- a pair of swivel wheels to facilitate proper placement under the vehicle
- a handle of appropriate length, allowing for trouble-free operation of the lift
- low-profile design

S-42292	2500 kg | 75-510mm	1	pc

STALCO



CONSTRUCTION
TOOLS

Trowels and ladles

Triangular trowel



- carbon steel
- lacquered wooden handle

S-37157	190 mm	1/30	pc
S-37159	210 mm	1/30	pc

Trapezoid trowel



- stainless steel
- lacquered wooden handle

S-37362	140 mm	1/12/72	pc
S-37364	140 mm	1/12/72	pc
S-37366	160 mm	1/12/72	pc
S-37368	180 mm	1/12/72	pc

Trapezoid trowel



- stainless steel
- two-component handle

S-37462	140 mm	1/12/72	pc
S-37464	140 mm	1/12/72	pc
S-37466	160 mm	1/12/72	pc
S-37468	180 mm	1/12/72	pc
S-37469	140 mm	1/30	pc
S-37471	160 mm	1/30	pc
S-37473	180 mm	1/30	pc

Grouting trowel



- carbon steel
- lacquered wooden handle

S-37322	8 mm	1/12/120	pc
S-37324	10 mm	1/12	pc
S-37327	12 mm	1/12	pc

Aerated concrete trowel



- thick powder coated sheet
- beech wood handle

S-37751	115 mm	1/10	pc
S-37753	240 mm	1/10	pc

Aerated concrete wall chaser



- powder coated steel sheet
- arm - flat bar
- handle - beech wood

S-37759	600 mm	1/10	pc

Stucco trowel



- stainless steel
- lacquered wooden handle

S-37350	60 mm	1/12/120	pc
S-37351	80 mm	1/12/120	pc
S-37352	100 mm	1/12/120	pc

Stucco trowel



- stainless or carbon steel
- two-component handle

S-37450	60 mm	1/12/120	pc
S-37451	80 mm	1/12/120	pc
S-37452	100 mm	1/12/120	pc
S-37455	80 mm	1/12	pc
S-37457	100 mm	1/12	pc
S-37459	120 mm	1/12	pc

Outdoor stucco trowel



- carbon steel
- lacquered wooden handle

S-37372	80 x 80 mm	1/12	pc

Indoor stucco trowel



- carbon steel
- lacquered wooden handle

S-37374	80 x 80 mm	1/12	pc

Masonry scoop



- galvanized steel
- lacquered wooden handle

S-37170	Ø170 mm	1/10/30	pc

Floats and trowels

Stainless steel float 280 x 130 mm



- top made of stainless steel
- thickness 0.7 mm
- plastic handle

S-37204	smooth	1/24	pc
S-37206	6 x 6 tooth	1/24	pc
S-37208	8 x 8 tooth	1/24	pc
S-37210	10 x 10 tooth	1/24	pc

Stainless steel float 280 x 130 mm



- stainless steel
- lacquered wooden handle

S-37214	smooth	1/30	pc
S-37216	6 x 6 tooth	1/30	pc
S-37218	8 x 8 tooth	1/30	pc
S-37220	10 x 10 tooth	1/30	pc

Stainless steel float 280 x 130 mm



- stainless steel
- two-component handle

S-37224	smooth	1/30	pc
S-37225	4x4 tooth	1/30	pc
S-37226	6 x 6 tooth	1/30	pc
S-37228	8 x 8 tooth	1/30	pc
S-37230	10 x 10 tooth	1/30	pc
S-37232	12 x 12 tooth	1/30	pc


Stainless steel float 380 x 130 mm



- stainless steel
- lacquered wooden handle

S-37300	smooth	1/30	pc
S-37306	6 x 6 tooth	1/30	pc
S-37308	8 x 8 tooth	1/30	pc
S-37310	10 x 10 tooth	1/30	pc

Stainless steel float 480 x 130 mm

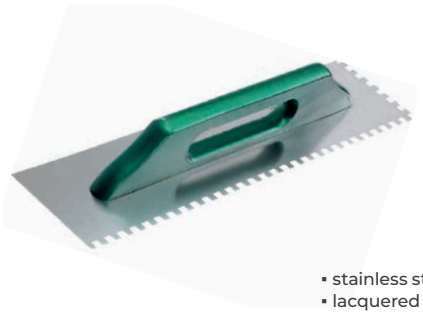

- stainless steel
- lacquered wooden handle

S-37400	smooth	1/30	pc
S-37408	8 x 8 tooth	1/25	pc
S-37410	10 x 10 tooth	1/30	pc

Stainless steel float 580 x 130 mm



- stainless steel
- lacquered wooden handle

S-37500	smooth	1/30	pc

Styrofoam float



- the high hardness of polystyrene foam ensures longer service life

S-37627	270 mm	1/10	pc
S-37632	320 mm	1/10	pc
S-37645	450 mm	1/10	pc
S-37660	600 mm	1/10	pc
S-37675	750 mm	1/10	pc
S-37680	900 mm	1/10	pc

PVC float with felt/rubber



- plastic body
- felt foot with a thickness of 5 mm
- rubber foot with a thickness of 5 mm

S-37513	270 x 130 mm	1/10	pc

PVC float with felt/rubber



S-37515	270 x 130 mm	1/10	pc

PVC float with sponge



- plastic body
- thick sponge - soft, with small pores
- thin sponge - sharp, with large pores

S-37517	270 x 130 mm	1/10	pc

PVC float with sponge



S-37519	270 x 130 mm	1/10	pc

ABS float



- plastic body

S-37520	2 mm	1/10	pc
S-37522	3 mm	1/10	pc

PVC sanding float



- plastic body
- rubber foot with a thickness of 3 mm
- fixing with wing bolts or with a latch

S-37523	225 x 100 mm	1/30	pc
S-37525	210 x 100 mm	1/30	pc

Grate float



- plastic body
- backing of galvanized steel, punched

S-37527	270 mm	1/20	pc
S-37529	400 mm	1/10	pc


PVC float with sandpaper



- ergonomic handle made of polymer
- permanently bonded sandpaper
- large working surface

S030437514	400x180 mm, 0,62 kg, G16	1/10	pc

Pass-through rasp float

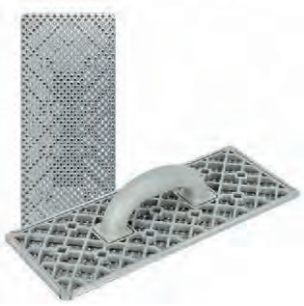

- for leveling joints of Styrofoam boards during thermal insulation work
- reinforced working surface with a grid structure
- large openings
- galvanized steel plate with sharp, densely distributed holes

S030437270	270 mm	1/20	pc

Putty knife for facades



- stainless steel
- plastic handle

S-37715	150 mm	1/50	pc
S-37720	200 mm	1/50	pc
S-37725	250 mm	1/50	pc
S-37735	350 mm	1/25	pc
S-37745	450 mm	1/25	pc

Putty knife



- stainless steel
- lacquered wooden handle

S-37003	30 mm	1/12/240	pc
S-37003	30 mm	1/12/240	pc
S-37004	40 mm	1/12/240	pc
S-37006	60 mm	1/12/240	pc
S-37008	80 mm	1/12/240	pc
S-37010	100 mm	1/12/240	pc
S-37012	120 mm	1/12/240	pc

Putty knife



- stainless steel
- ergonomic comfortable two-component grip

S-37040	40 mm	1/12/240	pc
S-37060	60 mm	1/12/240	pc
S-37080	80 mm	1/12/240	pc
S-37100	100 mm	1/12/240	pc
S-37120	120 mm	1/12/240	pc
S-37125	150 mm	1/12/120	pc

Putty knife



- stainless steel
- ergonomic comfortable two-component grip

S-37127	200 mm	1/12/120	pc
S-37129	240 mm	1/12/120	pc

Bucket spatula



- made of 0.7 mm thick stainless steel
- profiled at the right angle for convenient and accurate removal of material from the bucket
- light, two-component SOFT handle ensures a firm grip and comfort of use

S030537126	165 mm	1/4	pc

Multifunctional scraper



- blade made of stainless steel
- ergonomic, two-component handle made of non-slip material
- wide range of applications: spatula, scraper, device for opening containers, cleaning grouting joints, cracks, crevices, removing rust, cleaning paint rollers, pulling out nails, etc.

S-37186	-	1/10	pc

Plastic surface putty



- precisely made PVC handle
- plugs made of high-quality plastic with the addition of fiberglass - impact and cracking resistant

S030539741	400 x 0.3 mm	1	pc
S030539743	600 x 0.3 mm	1	pc
S030539745	800 x 0.3 mm	1	pc

Plastic putty knife



- cold-rolled stainless steel blade
- width 86 mm, thickness 0.4 mm
- polished working edge
- rounded blade corners to avoid scratches on the walls during work

S030573565	400 x 0.4 mm	1	pc
S030573566	600 x 0.4 mm	1	pc
S030573567	800 x 0.4 mm	1	pc

Japanese putty knife



- made of plastic

S-37130	50 - 120 mm	1/25/200	set

Japanese putty knife



- carbon steel
- plastic handle

S-37140	50 - 120 mm	1/25/200	set

Grouting float



- flexible rubber with high resistance to abrasion
- chamfered edges at different angles
- comfortable plastic handle

S-37531	95 x 255 mm	1/12	pc

Grout spreader



- wooden frame

S-39715	150 mm	1/10	pc
S-39720	200 mm	1/10	pc
S-39730	300 mm	1/10	pc

Grout spreader




- purpose: to level the freshly applied grout
- ergonomic shape allows working in different places
- edges cut at different angles
- flexible rubber with high abrasion resistance

S-39735	0	1/10	pc

Tiling tools

Device for cutting and breaking tiles

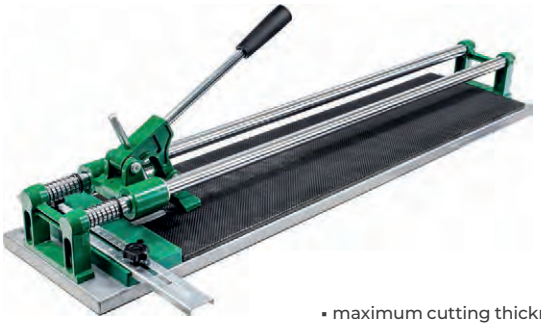

- maximum cutting thickness: 12 mm
- cutting angle: 90 °
- ball-bearing blade slider
- rigid guides
- thick base
- non-slip cover

S-38155	700 mm	1/2	pc
S-38157	1000 mm	1	pc

Device for cutting and breaking tiles



- maximum cutting thickness: 16 mm
- cutting angle: 0° - 60°
- ball-bearing blade slider
- hardened steel guide
- rigid aluminum top
- steel adjustable square

S-38159	600 mm	1/2	pc
S-38161	800 mm	1/2	pc

Glaze cutting knife



- made of hardened steel
- cutting wheel Ø8mm
- for cutting ceramic tiles, porcelain, stoneware
- fits machines S-38153, S-38155, S-38157

S-38162	Ø8 mm	1/20/200	pc

Glaze cutting wheel ø22x5x6mm



- ti coating
- for cutting ceramic tiles, porcelain, stoneware
- fits machines S-38159, S-38161

S-38167	Ø22 mm	1/40/200	pc

Tile wedges



- made of plastic
- comes in packs with euro hangers

S-39520	small	1/50	set
S-39540	large	1/50	set

Tile crosses



- made of plastic
- comes in packs with euro hangers

S-39610	1 mm	1/50	set
S-39615	1.5 mm	1/50	set
S-39620	2 mm	1/40	set
S-39625	2.5 mm	1/40	set
S-39630	3 mm	1/40	set
S-39640	4 mm	1/40	set
S-39650	5 mm	1/40	set
S-39660	6 mm	1/30	set
S-39680	8 mm	1/40	set
S-39690	10 mm	1/30	set

Tile crosses - type t



- made of plastic
- comes in packs with euro hangers

S-39692	6 mm	1/30	set
S-39694	8 mm	1/30	set
S-39696	10 mm	1/30	set

Tiling bucket



- convenient scale
- rolls Ø40 x 230 mm
- grate to remove excess water
- strong grip
- allows using S-39766 wheels

S-39769	22 L	1	pc

Excavation work tools

Sand shovel



- made of hardened steel
- wooden handle, poplar

S-47438	wooden handle	1/5	pc

Shovel for coal



- made of hardened steel
- pressed
- riveted
- wooden handle – beech, finished with a two-component grip

S-47444	wooden handle	1/5	pc

Sand shovel



- for construction and cleaning works

S-47469	metal handle	1/5	pc

Plastic shovel



- used for cleaning work
- high-temperature resistant
- deep, suitable for collecting gravel, sand, soil, stone and ash

S-47480	400 mm	1/10	pc

Straight spade



- for light gardening work

S-47450	wooden handle	1/5	pc

Sharp spade



- for light gardening work

S-47451	wooden handle	1/5	pc

Drain spade



- for nursery and construction work

S-47453	wooden handle	1/5	pc

Straight spade



- for construction and cleaning works

S-47454	metal handle	1/5	pc

Sharp spade



- for construction and cleaning works

S-47456	metal handle	1/5	pc

Pick



- head made of carbon steel
- beech wood shaft

S-47486	1.5 kg	1	pc
S-47488	2.5 kg	1	pc

Pistols and squeezers

Foam gun



- precision brass trigger regulator
- super tight body
- precision brass nozzle

S-47500	-	1/20	pc

Foam gun



- precision brass nozzle

S-47502	-	1/20	pc

Caulking gun



- durable steel body
- strong hexagonal rod
- anti-drip silicone protection

S-37001	230 mm	1/24	pc

Caulking gun



- durable steel body
- anti-drip silicone protection

S-37002	230 mm	1/24	pc

Caulking gun



- durable steel body
- ratchet mechanism
- non-slip handle
- complete with a pin for clearing the applicator

S-37005	230 mm	1/24	pc

Caulking gun



- made of steel and aluminum
- anti-drip silicone protection
- rotary handle
- complete with a pin for clearing the applicator

S-37007	230 mm	1/24	pc

Caulking gun



- made of steel and aluminum
- anti-drip silicone protection

S-37009	225 mm	1/12	pc
S-37011	600 mm	1/12	pc

Caulking gun



- wide strong lock pushing the screw
- heavy-duty steel cap coupling the skeleton and the body
- properly folded thicker and wider sheet adds structural rigidity

S-37013	240 mm	1/12	pc

Caulking gun



- wide, strong lock pushing the screw
- PVC washer fits tightly into the tube
- robust, solid PVC dispenser

S-37015	225 mm	1/12	pc

Welding technology

Welding electrodes



- titanium oxide coating

S-47452	Ø2.5 x 350 mm	5/20	kg
S-47455	Ø3.2 x 350 mm	5/20	kg
S-47458	Ø4.0 x 400 mm	5/20	kg

Building site containers

Bucket



- made of plastic
- metal handle

S-37812	12 L	1	pc
S-37816	16 L	1	pc
S-37822	20 L	1	pc

Round mortar tub



- made of plastic
- carrying grips

S-37833	40 L	1	pc
S-37835	65 L	1	pc
S-37837	90 L	1	pc

Rectangular mortar tub



- made of plastic
- carrying grips

S-37845	40 L	1	pc
S-37865	60 L	1	pc
S-37890	80 L	1	pc

STALCO
PERFECT



CONSTRUCTION
TOOLS

Trowels and ladles

Triangular trowel



- hardened steel 1.2 mm, 46-48 HRC
- handle - lacquered beech
- welded joint - 6 years warranty

S-73049	190 mm	1/20	pc
S-73051	210 mm	1/20	pc

Trapezoid trowel



- hardened stainless steel 1.2 mm, 46-48 HRC
- handle - lacquered beech
- welded joint - 6 years warranty

S-73024	140 mm	1/6/36	pc
S-73026	160 mm	1/36	pc
S-73028	180 mm	1/6/30	pc

Trapezoid trowel



- hardened stainless steel 1 mm, 46-48 HRC
- bimaterial handle
- welded joint - 6 years warranty

S-73034	140 mm	1/6/36	pc
S-73036	160 mm	1/6/36	pc
S-73038	180 mm	1/6/36	pc

Trapezoid trowel



- hardened steel 1.2 mm, 46-48 HRC
- handle - lacquered beech
- welded joint - 6 years warranty

S-73076	160 mm	1/20	pc
S-73078	180 mm	1/20	pc

Stucco trowel



- hardened stainless steel 1 mm, 46-48 HRC
- handle - lacquered beech
- welded joint - 6 years warranty

S-73006	60 mm	1/6/30	pc
S-73008	80 mm	1/6/36	pc
S-73010	100 mm	1/6/36	pc
S-73012	120 mm	1/36	pc

Stucco trowel



- hardened stainless steel 1 mm, 46-48 HRC
- bimaterial handle
- welded joint - 6 years warranty

S-73016	60 mm	1/6/36	pc
S-73018	80 mm	1/6/36	pc
S-73020	100 mm	1/6/36	pc
S-73022	120 mm	1/30	pc

Stucco trowel



- hardened spring steel 1.2 mm, 46-48 HRC
- handle - lacquered beech
- welded joint - 6 years warranty

S-73058	80 mm	1/6/36	pc
S-73060	100 mm	1/6/36	pc
S-73062	120 mm	1/6/36	pc

Stucco trowel



- hardened stainless steel 1.2 mm, 46-48 HRC
- bimaterial handle
- welded joint - 6 years warranty

S-73068	80 mm	1/6/36	pc
S-73070	100 mm	1/6/36	pc
S-73072	120 mm	1/6	pc

Floats and trowels

Stainless steel float



- stainless steel with high hardness
- handle - lacquered beech

S-73100	280 x 130 mm; smooth	1/30	pc
S-73106	280 x 130 mm ; 6 x 6 tooth	1/24	pc
S-73108	280 x 130 mm ; 8 x 8 tooth	1/24	pc
S-73110	280 x 130 mm ; 10 x 10 tooth	1/24	pc

Stainless steel float



- stainless steel with high hardness
- bimaterial handle

S-73200	280 x 130 mm; smooth	1/30	pc
S-73206	280 x 130 mm ; 6 x 6 tooth	1/30	pc
S-73208	280 x 130 mm ; 8 x 8 tooth	1/30	pc
S-73210	280 x 130 mm ; 10 x 10 tooth	1/30	pc

Stainless steel float



- special shape of the teeth elimi-nates voids under the tile
- bi-material handle
- significantly lower glue consumption
- perfect for laying tiles on terraces

S-73211	280 x 130 mm; small teeth	1/30	pc
S-73212	280 x 130 mm; large teeth	1/30	pc

Stainless steel float



- stainless steel with high hardness
- handle - lacquered beech

S-73300	380 x 130 mm; smooth	1/10	pc
S-73308	380 x 130 mm ; 8 x 8 tooth	1/10	pc
S-73310	380 x 130 mm ; 10 x 10 tooth	1/10	pc


Stainless steel float



- stainless steel with high hardness
- handle - lacquered beech

S-73400	480 x 130 mm; smooth	1/10	pc
S-73408	480 x 130 mm ; 8 x 8 tooth	1/10	pc
S-73410	480 x 130 mm ; 10 x 10 tooth	1/10	pc

Long float

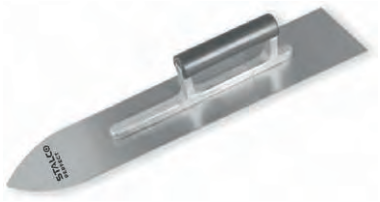

- hardened spring steel 46-48 HRC
- handle - lacquered beech

S-73500	500 mm	1/30	pc

Stainless steel float



- stainless steel with high hardness
- handle - lacquered beech

S-73508	580 x 130 mm; smooth	1/18	pc

Smooth float 2 x 9 mm



- hardened stainless steel
- two-component handle
- venetian plasters, stucco

S-73520	200 x 90 mm	1/20	pc
S-73524	240 x 90 mm	1/20	pc

Smooth float



- ground and polished work surface
- guarantees the best effect of polished Venetian stucco
- aluminum neck, made of a special aluminum alloy, lightweight yet durable
- chamfered side edges to prevent delamination of the applied material on the surface
- hardened stainless steel 46-50 HRC
- handle mounted in a system that allows replacement with a new one
- handle made of natural leather

S-73526	200 mm	1/12	pc
S-73528	240 mm	1/12	pc

Smooth float



- lightweight yet durable aluminum neck made of a special aluminum alloy
- chamfered side edges to prevent delamination of the applied material on the surface
- used to smoothen walls and ceilings with putty and plaster compounds
- hardened stainless steel 46-50 HRC
- handle mounted in a system that allows replacement with a new one
- handle made of natural leather

S-73535	305 mm	1/12	pc
S-73537	365 mm	1/12	pc
S-73539	405 mm	1/12	pc
S-73540	460 mm	1/12	pc

ABS float



- plastic float
- ABS handle
- padding: natural sponge

S-73218	280 x 130 mm	1/16	pc

ABS float



- plastic float
- ABS handle
- padding: hydro-sponge

S-73222	280 x 130 mm	1/12	pc
S-73224	280 x 130 mm	1/12	pc

ABS float



- plastic float
- ABS handle
- padding: rubber

S-73230	280 x 130 mm	1/18	pc

ABS float



- plastic float
- ABS handle
- padding: felt

S-73232	280 x 130 mm	1/18	pc

ABS float



- plastic float
- ABS handle
- padding: white sponge

S-73234	280 x 130 mm	1/12	pc

Articulated putty knife



- aluminum table top
- rubber sponge underlay, natural rubber; 1.8 mm thick
- threaded steel cap for mounting the handle
- joint
- 125 cm beech handle

S-73589	400 x 200 mm	1/10	pc

Putty knife for facades



- stainless steel blade 0.5 mm
- aluminum profile with a very high stiffness
- bi-material handle

S-73280	280 mm	1/10	pc

Putty knife for facades



- stainless steel blade 0.5 mm
- aluminum profile with a very high stiffness
- bi-material handle

S-73479	480 cm	1/10	pc

Putty knife for facades



- stainless steel blade 0.4 mm
- aluminum profile with a very high stiffness
- bi-material handle

S-73380	380 mm	1/10	pc
S-73480	480 mm	1/10	pc
S-73580	580 mm	1/10	pc
S-73680	680 mm	1/10	pc

Plastering spatula set with accessories



- included:
- aluminium putty
- 250 mm - S-73592
- 400 mm - S-73594
- 600 mm - S-73596
- 800 mm - S-73598
- 1000 mm - S-73600
- cork painting putty with Ph2 bit
- 150 mm - S-73371
- painting holder S-73880
- telescopic pole 0.93 - 1.42 m S-73630
- putty knife holder S-73628
- plastering roller S-73927

S-73560	10 elements	1	set

Putty knife 0.3 Mm



- stainless steel blade 0.3mm
- very stiff aluminum handle
- replaceable blade system

S-73592	250 x 0.3 mm	1	pc
S-73594	400 x 0.3 mm	1	pc
S-73596	600 x 0.3 mm	1	pc
S-73598	800 x 0.3 mm	1	pc
S-73600	1000 x 0.3 mm	1	pc
S-73602	1250 x 0.3 mm	1	pc
S-73604	1500 x 0.3 mm	1	pc

Putty knife 0.5 Mm



- 0.5 mm stainless steel blade
- very stiff aluminum handle
- replaceable blade system

S-73606	250 x 0.5 mm	1	pc
S-73608	400 x 0.5 mm	1	pc
S-73610	600 x 0.5 mm	1	pc
S-73612	800 x 0.5 mm	1	pc
S-73614	1000 x 0.5 mm	1	pc
S-73616	1250 x 0.5 mm	1	pc
S-73618	1500 x 0.5 mm	1	pc

Plastic plaster putty set with accessories



- the set includes
- plastic putty knife
- 250 mm – S-73544
- 400 mm – S-73546
- 600 mm - S-73548
- 800 mm – S-73550
- 1000 mm – S-73552
- cork painting putty with Ph2 bit
- 150 mm – S-73371
- painting holder S-73880
- telescopic stick 0.93 - 1.42 m S-73630
- putty holder S-73628
- paint roller for plaster S-73927

S-73558	10 items	1	set

Plastic surface putty



- 0.3 mm stainless steel blade
- handle made of warp-resistant and shatter-proof plastic
- interchangeable blade system

S-73544	250 x 0,3 mm	1	pc
S-73546	400 x 0,3 mm	1	pc
S-73548	600 x 0,3 mm	1	pc
S-73550	800 x 0,3 mm	1	pc
S-73552	1000 x 0,3 mm	1	pc
S-73554	1250 x 0,3 mm	1	pc

Replacement blade for plastic spatula



- stainless steel blade, hardened 48-50 HRC
- spring
- abrasion-resistant

S-73562	250 x 0,3 mm	1/40	pc
S-73563	400 x 0,3 mm	1/30	pc
S-73564	600 x 0,3 mm	1/50	pc
S-73565	800 x 0,3 mm	1/50	pc
S-73566	1000 x 0,3 mm	1/40	pc
S-73567	1250 x 0,3 mm	1/30	pc

Putty knife blade



- hardened stainless steel blade 48-50 HRC
- resilient
- abrasion-resistant

S-73619	250 x 0.3 mm	1/50	pc
S-73621	400 x 0.3 mm	1/50	pc
S-73622	600 x 0.3 mm	1/50	pc
S-73623	800 x 0.3 mm	1/50	pc
S-73624	1000 x 0.3 mm	1/35	pc
S-73625	1250 x 0.3 mm	1/35	pc
S-73627	1500 x 0.3 mm	1/35	pc
S-73582	250 x 0.5 mm	1/50	pc
S-73583	400 x 0.5 mm	1/50	pc
S-73584	600 x 0.5 mm	1/50	pc
S-73585	800 x 0.5 mm	1/50	pc
S-73586	1000 x 0.5 mm	1/35	pc
S-73587	1250 x 0.5 mm	1/35	pc
S-73588	1500 x 0.5 mm	1/35	pc

Case for plastering tools



- made of impact- and shock-resistant plastic,
- the centre is padded with a very high-quality corrugated sponge to prevent movement
- of tools inside the case during transport,
- with four robust snap fasteners,
- made using injection moulding,
- made of high-quality plastic,
- foam filling inside the „Egg-Form" on the lower part,
- flat foam filling inside on the upper part.

S-76610	118 x 35 x 11 cm	1	pc

Telescopic handle for putty knife holder



- made of plastic and aluminum
- quick-release switch for the handle

S-73629	1,2 - 2,0 m	1/6/24	pc
S-73630	0,93 - 1,43 m	1/6/24	pc

Putty knife holder



- made of plastic
- moving head

S-73628	-	1	pc

Facade rasp for styrofoam



- comfortable, ergonomic anodized aluminum profile
- durable and rigid construction
- easy-to-replace modular blades

S030437160	1600 mm	1	pc

Blades for facade rasps for styrofoam



- easy-to-replace modular blades – simple installation using a star-type screwdriver
- the rasp profile and blades form a reusable set

S030437161	1600 mm	1/5	pc

Cork putty knife



- ergonomic handle coated with natural cork
- hardened stainless steel top, thicknessed

S-73361	40 mm	1/12	pc
S-73363	60 mm	1/12	pc
S-73365	80 mm	1/12	pc
S-73367	100 mm	1/12	pc
S-73369	120 mm	1/12	pc

Cork putty knife + bit



- ergonomic handle coated with natural cork
- removable bit Ph2 25mm
- hardened stainless steel top, thicknessed

S-73371	150 mm	1/12	pc

Sealant spatulas



- for smoothening out silicone pulp during tiling works

S-75276	4 pc	1/24	pack

Tiling tools

System 1 wedges



- leveling tiles using the clip/wedge method with a tile thickness of 6 to 14 mm
- for tiling work
- compatible with other SYSTEM 1 components

S-75212	200pcs	1	pack

System 2 wedges



- tile leveling using the clip/wedge method with a tile thickness of 4 to 12 mm
- for tiling work
- compatible with other SYSTEM 2 components

S-75227	350 pc	1	pack

System 3 wedges



- tile leveling using the clip/wedge method with a tile thickness of 6 to 18 mm
- for tiling work
- compatible with other SYSTEM 3 components

S-75246	100 pc	1	pack

Tiling wedges



- for tiling work
- for leveling tiles
- once the glue has dried, break off the clips

S-75283	35 x 8 x 6mm ; 500 pc	1/16	pack
S-75285	50 x 13 x 10mm ; 150 pc	1/16	pack

1mm clips for system 1



- leveling tiles using the clip/wedge method with a tile thickness of 6 to 14 mm
- for tiling work
- compatible with other SYSTEM 1 components

S-75206	1mm ; 250 pc	1	pack
S-75208	1.5mm ; 250 pc	1	pack
S-75210	2mm ; 250 pc	1	pack

1mm clips for system 2



- tile leveling using the clip/wedge method with a tile thickness of 4 to 12 mm
- for tiling work
- compatible with other SYSTEM 2 components

S-75221	1mm ; 250 pc	1	pack
S-75223	1.5mm ; 250 pc	1	pack
S-75225	2mm ; 250 pc	1	pack

1mm clips for system 3



- tile leveling using the clip/wedge method with a tile thickness of 6 to 18 mm
- for tiling work
- compatible with other SYSTEM 3 components

S-75238	1mm ; 130 pc	1	pack
S-75240	1.5mm ; 130 pc	1	pack
S-75242	2mm ; 130 pc	1	pack
S-75244	3mm ; 130 pc	1	pack

1mm clips for system 4



- tile leveling using the clip/wedge method with a tile thickness of 3 to 16 mm
- for tiling work
- compatible with other SYSTEM 4 components

S-75265	1mm ; 300 pc	1	pack
S-75267	1.5mm ; 300 pc	1	pack
S-75269	2mm ; 300 pc	1	pack
S-75271	3mm ; 300 pc	1	pack

Tile spacers



- for tiling work
- for leveling tiles
- once the glue has dried, break off the clips

S-75279	single system/full joint; 80 pc	1/16	pack

Cross spacers



- for tiling work
- for leveling tiles
- once the glue has dried, break off the clips

S-75281	half system/fractional joint; 80 pc	1/16	pack

System 1 leveling kit



- leveling tiles using the clip/wedge method with a tile thickness of 6 to 14 mm
- for tiling work
- compatible with other SYSTEM 1 components

S-75200	1mm ; 100/100 pc	1	pack
S-75202	1.5mm ; 100/100 pc	1	pack
S-75204	2mm ; 100/100 pc	1	pack

System 2 leveling kit



- tile leveling using the clip/wedge method with a tile thickness of 4 to 12 mm
- for tiling work
- compatible with other SYSTEM 2 components

S-75215	1mm ; 150/150 pc	1	pack
S-75217	1.5mm ; 150/150 pc	1	pack
S-75219	2mm ; 150/150 pc	1	pack

System 3 leveling kit



- tile leveling using the clip/wedge method with a tile thickness of 6 to 18 mm
- for tiling work
- compatible with other SYSTEM 3 components

S-75230	1mm ; 50/50 pc	1	pack
S-75232	1.5mm ; 50/50 pc	1	pack
S-75234	2mm ; 50/50 pc	1	pack
S-75236	3mm ; 50/50 pc	1	pack

System 4 leveling kit



- tile leveling using the clip/wedge method with a tile thickness of 3 to 16 mm
- for tiling work
- compatible with other SYSTEM 4 components

S-75249	1mm ; 100/50 pc	1	pack
S-75251	1.5mm ; 100/50	1	pack
S-75253	2mm ; 100/50	1	pack
S-75255	3mm ; 100/50	1	pack

System 4 washer



- tile leveling using the clip/wedge method with a tile thickness of 3 to 16 mm
- for tiling work
- compatible with other SYSTEM 4 components

S-75273	58mm ; 100 pc	1	pack

Pliers for leveling systems



- for tiling work
- for leveling tiles
- once the glue has dried, break off the clips
- compatible with SYSTEMS 1, 2 and 3

S-75274	1 pc	1/16	pack

Excavation work tools

Sand shovel



- made of high-grade Swedish SAAB boron steel
- hardened steel
- pressed worktop
- metal handle covered with a non-slip rubber cap
- two-component handle

S-74001	0	1/5	pc

Straight spade



- made of high-grade Swedish SAAB boron steel
- hardened steel
- pressed worktop
- metal handle covered with a non-slip rubber cap
- two-component handle

S-74003	0	1/5	pc

Pointed spade



- made of high-grade Swedish SAAB boron steel
- hardened steel
- pressed worktop
- metal handle covered with a non-slip rubber cap
- two-component handle

S-74005	0	1/5	pc

Pistols and squeezers

Foam gun



- brass foam flow control
- handle and housing made of aluminum alloy to ensure lightness and strength
- stainless steel striker for a perfect seal

S-76600	0	1/20	pc

Caulking gun for chemical anchors



- 3 of strong steel bars extruding the mixture
- wide, sturdy lock
- thick, wide sheet provides stiffness of the extruder
- sturdy, thick PVC ring accurately matched to the anchor's cartridge

S-73017	205 mm	1/10	pc

Caulking gun



- structure made of 2mm thick sheet
- strong hexagonal rod extruding the mixture
- powerful lever mounted on a strong steel rivet

S-73001	240 mm	1/24	pc

Chute caulking gun



- strong, steel rod extruding the mixture
- wide, strong push lock
- double lock
- heavy-duty steel cap coupling the skeleton to the body
- wide, thick sheet provides stiffness of the extruder

S-73007	245 mm	1/12	pc

Tube caulking gun



- rigid, lightweight body made of aluminum alloy
- wide, strong push lock
- PVC washer fits tightly into the squeezer tube
- robust, solid PVC dispenser

S-73011	225 mm	1/10	pc

Building site containers

Filler container



- for mixing putty, gypsum, joints, plaster
- made of polished stainless steel sheet with a thickness of 0.8 mm

S031773360	-	1/2	pc

STALCO



PAINTING ACCESSORIES

Painting tools

Flat Paintbrush Universal



- for all kinds of oil and nitro paints

S-38970	1" / 51 / 15 mm	1/24	pc
S-38972	1.5" / 51 / 15 mm	1/24	pc
S-38974	2" / 51 / 15 mm	1/24	pc
S-38976	2.5" / 51 / 15 mm	1/24	pc
S-38978	3" / 57 / 15 mm	1/24	pc
S-38980	3.5" / 57 / 15 mm	1/12	pc
S-38982	4" / 57 / 15 mm	1/12	pc

Flat Paintbrush Wood



- for varnishes, stains and wood impregnation

S-38990	1" / 51 / 15 mm	1/24	pc
S-38992	1.5" / 51 / 15 mm	1/24	pc
S-38994	2" / 57 / 15 mm	1/24	pc
S-38996	2.5" / 57 / 15 mm	1/24	pc
S-38998	3" / 57 / 15 mm	1/24	pc
S-39000	3.5" / 57 / 15 mm	1/12	pc

Flat Paintbrush Acryl



- for emulsion, acrylic and latex paints

S-39002	1" / 51 / 15 mm	1/24	pc
S-39004	1.5" / 51 mm	1/24	pc
S-39006	2" / 57 mm	1/24	pc
S-39008	2.5" / 57 mm	1/24	pc
S-39010	3" / 57 / 15 mm	1/24	pc
S-39012	3.5" / 57 / 15 mm	1/12	pc

Flat Paintbrush Nitro



- for all kinds of oil and nitro paints

S-39020	1" / 51 / 15 mm	1/24	pc
S-39022	1.5" / 51 / 15 mm	1/24	pc
S-39024	2" / 51 / 15 mm	1/24	pc
S-39026	2,5" / 57 / 15 mm	1/24	pc
S-39028	3" / 57 / 15 mm	1/24	pc
S-39030	3,5" / 57 / 15 mm	1/12	pc
S-39032	4" / 57 / 15 mm	1/12	pc

Round Brush Universal



- for all kinds of paints and varnishes

S-38940	Ø20 / 44 mm	1/24	pc
S-38942	Ø30 / 44 mm	1/24	pc
S-38944	Ø40 / 51 mm	1/24	pc
S-38946	Ø50 / 57 mm	1/12	pc
S-38948	Ø60 / 57 mm	1/12	pc

Wide Paintbrush Universal



- for emulsion paints
- for uneven and large surfaces, ensures faster painting

S-38984	190 / 83 / 90 mm	1/6	pc
S-38986	180 / 76 / 80 mm	1/6	pc
S-38988	170 / 70 / 70 mm	1/6	pc

Paste Brush Universal



- for emulsion paints and enamels
- for uneven and large surfaces, ensures faster painting

S-38958	70 / 51 / 30 mm	1/12	pc
S-38960	90 / 51 / 30 mm	1/12	pc
S-38962	110 / 57 / 30mm	1/12	pc
S-38964	130 / 57 / 30 mm	1/12	pc
S-38966	140 / 64 / 40 mm	1/12	pc
S-38968	150 / 64 / 50 mm	1/12	pc

Paste Brush Wood



- for varnishes and stains
- for uneven and larger surfaces, ensures faster painting

S-39014	130 / 57 / 30 mm	1/12	pc

Radiator Brush Universal



- for all kinds of paints and varnishes

S-38950	25 / 44 / 8 mm	1/24	pc
S-38952	36 / 44 / 8 mm	1/24	pc
S-38954	50 / 51 / 8 mm	1/24	pc
S-38956	63 / 51 / 8 mm	1/24	pc

Paint Roller - Velur Nitro



- for all types of paint and varnish, including those based on nitro solvents (resistant to them)
- made in thermofusion technology
- leaves a smooth surface
- perfect for paneling, flooring etc.

S-38811	180 mm	1/5/50	pc
S-38813	250 mm	1/5/50	pc

Paint Roller - Gold Line Facade Universal



- polyacrylic roller for emulsion and acrylic paint
- distributes the paint perfectly
- leaves a fine structure

S-38844	180 mm	1/5/30	pc
S-38846	250 mm	1/5/30	pc

Paint Roller - Gold Line Universal



- polyacrylic roller for emulsion, acrylic and latex paint
- perfectly distributes paint
- creates a fine structure

S-38831	60 mm	1/25	set
S-38833	100 mm	1/50	pc
S-38835	150 mm	1/25	set
S-38837	100 mm	1/25	pc
S-38839	150 mm	1/25	pc
S-38841	180 mm	1/5/50	pc
S-38843	250 mm	1/5/50	pc

Paint Roller - Gold Line Angular Universal



- polyacrylic roller
- for painting corners with emulsion, latex and acrylic paints

S-38873	18 mm	1/30	pc

Paint Roller - Green Line Acryl



- polyester roller designed for two-component paints and dense single coating paints
- very strong fabric resistant to tearing and abrasion
- perfect for uneven wall and ceiling surfaces

S-38819	100 mm	1/50	pc
S-38821	150 mm	1/25	set
S-38823	100 mm	1/25	pc
S-38825	150 mm	1/25	pc
S-38827	180 mm	1/5/50	pc
S-38829	250 mm	1/5/50	pc

Paint Roller - Gold Line Universal



- polyester roller for emulsion, acrylic and latex paint
- distributes the paint perfectly
- leaves a fine structure

S-38780	100 mm	1/50	pc
S-38782	180 mm	1/5/50	pc
S-38784	250 mm	1/5/50	pc

Paint Roller - Flock Acryl



- for acrylic paints and varnish stain
- thanks to flocking, it leaves no „bubbles"

S-38921	50 mm	1/150	set
S-38923	70 mm	1/25	set
S-38925	110 mm	1/100	pc
S-38927	160 mm	1/250	set

Paint Roller - Microfaser Wood



- for acrylic paint, glaze and stains
- chamfered
- leaves a slight structure

S-38790	100 mm	1/50	pc
S-38792	180 mm	1/5/50	pc
S-38794	250 mm	1/5/50	pc

Paint Roller - Moltopren Acryl



- standard roller with a thickness of 30 kg /m3
- for water-based, oil-based paints and varnishes based on non-aggressive solvents

S-38875	50 mm	1/25	set
S-38877	70 mm	1/25	set
S-38879	110 mm	1/50	pc
S-38881	160 mm	1/25	set

Telescopic Handle 1,1-2 M



- designed for paint roller holders

S-38883	1.1 - 2.0 m	1/25	pc
S-38885	1.6 - 3.0 m	1/25	pc

Painting Handle



- paint roller handle 5cm / Ø 6 mm

S-38899	50 / Ø 6 mm	1/50	pc
S-38901	100/Ø6 mm – radiator	1/50	pc
S-38903	100 / Ø6 mm	1/50	pc
S-38905	180 / Ø 8 mm	1/50	pc
S-38907	250 / Ø 8 mm	1/50	pc

Painting Set - Velur Nitro



- small tray (15x29 cm)
- 2 rollers designed for all paints and varnishes including nitro solvent--based (resistant to their effect)
- made with thermofusion technology
- leaves a smooth surface
- paint roller handle
- perfect for paneling, flooring etc.

S-38909	100 mm	1/25	set

Painting Set - Green Line Acryl



- small tray (15x29 cm)
- 2 polyester rollers, designed for two-component paints and dense single coating paints
- very strong fabric resistant to tear and abrasion
- paint roller handle
- perfect for uneven wall and ceiling surfaces

S-38911	100 mm	1/25	set

Painting Set - Gold Line Universal



- small tray (15x29 cm)
- 2 polyacrylic rollers designed for acrylic paints and emulsions
- distributes paint perfectly
- creates a fine structure
- paint roller handle

S-38913	100 mm	1/25	set

Painting Set - Microfaser Wood



- small tray (15x29 cm)
- 2 rollers for thin paint - varnish stain, acrylics, thin-layer paints
- with the use of a special fabric, it paints very easily without splashing
- leaves a fine structure
- paint roller handle

S-38917	100 mm	1/25	set

Painting Set - Moltopren Acryl



- small tray (15x29 cm)
- 2 rollers made of foam with a density of 30kg/m3
- paint roller handle
- ideal for oil and nitro paints
- for painting elements with irregular shapes

S-38919	110 mm	1/25	set

Painter Grille, Large



- drains excess paint from the paint rollers

S-38887	270 x 290 mm	1/50	pc
S-38889	200 x 240 mm	1/50	pc

Paint Tray



- mini: for a roller 5 cm wide
- small: for a roller 10 cm wide
- medium: for a roller 18 cm wide
- large: for a roller 25 cm wide

S-38891	100 x 200 mm	1/50	pc
S-38893	150 x 290 mm	1/50	pc
S-38895	240 x 320 mm	1/50	pc
S-38897	330 x 340 mm	1/50	pc

Paint Bucket



- Paint bucket

S-38896	8 L	1/20	pc
S-38898	12 L	1/20	pc

Adhesive tapes

Masking tape



- for basic painting jobs

S042138219	19 mm x 25 m	1/12/48	pc
S042138225	25 mm x 25 m	1/9/36	pc
S042138230	30 mm x 25 m	1/10/40	pc
S042138238	38 mm x 25 m	1/6/24	pc
S042138248	48 mm x 25 m	1/6/24	pc
S042138271	30 mm x 50 m	1/10/40	pc
S042138274	38 mm x 50 m	1/6/24	pc
S042138277	48 mm x 50 m	1/6/24	pc

Blue masking tape



- for painting and general construction work

S042138531	30 mm x 25 m	1/40	pc
S042138534	38 mm x 25 m	1/24	pc
S042138537	48 mm x 25 m	1/24	pc
S042138540	30 mm x 50 m	1/40	pc
S042138543	38 mm x 50 m	1/24	pc
S042138546	48 mm x 50 m	1/24	pc
S042138547	48 mm x 50 m ; 3-pack	1/36	set

Washi universal masking tape



- for painting and general construction work

S042138218	25 mm x 25 m	1/36	pc
S042138220	38 mm x 25 m	1/24	pc
S042138222	48 mm x 25 m	1/20	pc
S042138224	10 mm x 50 m	1/96	pc
S042138226	30 mm x 50 m	1/32	pc
S042138228	38 mm x 50 m	1/24	pc
S042138231	48 mm x 50 m	1/20	pc
S042138232	38 mm x 50 m ; 3-pack	1/8	set

Duct tape



- for repair work, sealing cracks, securing loose elements e.g. during transport, and general DIY

S042238405	48 mm x 5 m	1/72	pc
S042238410	48 mm x 10 m	1/72	pc
S042238425	48 mm x 25 m	1/48	pc
S042238450	48 mm x 50 m	1/24	pc

Double-sided foam mounting tape



- for light mounting tasks

S042238475	19 mm x 5 m	1/90	pc

Double-sided mounting tape



- bonding various smooth surfaces of low weight, e.g. paper, plastic, glass, metal, fabrics

S042238505	48 mm x 5 m	1/72	pc
S042238510	48 mm x 10 m	1/72	pc
S042238525	48 mm x 25 m	1/48	pc

Brown packing tape



- for sealing cartons, boxes, envelopes — for household, office and warehouse use

S042338240	48 mm x 40 m	1/12/36	pc
S042338260	48 mm x 60 m	1/12/36	pc

Transparent packing tape



- for sealing cartons, boxes, envelopes — for household, office and warehouse use

S042338340	48 mm x 40 m	1/12/36	pc
S042338360	48 mm x 60 m	1/12/36	pc

Fiberglass joint tape for drywall



- for reinforcing joints between drywall boards and repairing wall cracks

S042238560	50 mm x 25 m	1/40	pc

Paper packing tape



- for sealing boxes, cartons, envelopes, paper, painter's cardboard

S042338250	48 mm x 50 m	1/60	pc

Red-white warning tape



- for marking hazardous and restricted areas

S042238580	75 mm x 100 m	1/24	pc

Fibermesh joint tape for drywall



- for reinforcing joints between drywall boards and repairing wall cracks

S042238020	50 mm x 20 m	1/72	pc
S042238045	50 mm x 45 m	1/54	pc
S042238090	50 mm x 90 m	1/24	pc

Insulation Tape



- made of PVC
- thickness 0.13 mm
- various colors

S-38615	15 mm x 10 m	10/240	pc
S-38620	15 mm x 10 m	10/240	pc
S-38625	15 mm x 10 m	10/240	pc
S-38630	15 mm x 10 m	10/240	pc
S-38635	15 mm x 10 m	10/240	pc
S-38640	15 mm x 10 m	10/240	pc

Foils

Stretch Film



- 23 microns

S-47680	50 cm	1/6	pc
S-47697	50 cm	1/6	pc
S-47698	50 cm	1/6	pc
S-47699	50 cm	1/6	pc

Stretch Film



- 23 microns

S-47700	10 cm	1/30	pc

Stretch Film



- 23 microns

S-47701	10 cm	1/50	pc

Blue self-adhesive protective film



- for protecting smooth surfaces such as windows, doors, furniture, and medium-rough surfaces

S043147674	500 mm x 75 m	1/6	pc
S043147672	500 mm x 30 m	1/6	pc

Transparent self-adhesive protective film



- for protecting smooth surfaces such as windows, doors, furniture, and medium-rough surfaces

S043147676	500 mm x 75 m	1/6	pc

Waterproof Painting Paper Roll



- floor protection

S043147125	25 m²	1/100	pc

Protective Film BASIC 60



- Lightweight protective film for basic cleaning and painting
- Protects surfaces from dust, paint, and dirt
- Durability rating: 2/5
- Color: transparent

S043147620	4 m x 5 m ; transparent	1/40	pc

Protective Film STRONG 500



- Strong protective film for intensive renovation and construction work
- Provides high resistance to mechanical damage and external factors
- Durability rating: 4/5
- Color: amber

S043147670	4 m x 5 m ; amber	1/30	pc

Protective Film BASIC 300



- Protective film for floors, furniture, and other interior design elements
- Effective during renovations, painting, and finishing work
- Durability rating: 2/5
- Color: gray

S043147630	4 m x 5 m ; szary	1/35	pc

Protective Film STRONG 900



- Strong, reusable protective film
- Effectively protects surfaces from dirt and moisture, both indoors and outdoors
- Durability rating: 4/5
- Color: Black

S043147650	4 m x 5 m ; black	1/10	pc

Protective Film MEDIUM 500



- Durable protective film for renovation and construction applications
- Damage- and tear-resistant
- Durability rating: 3/5
- Color: Black

S043147640	4 m x 5 m ; black	1/20	pc



STALCO
PERFECT

PAINTING ACCESSORIES

Painting tools

American Brush Universal



- for all kinds of oil and nitro paints
- for small painting jobs

S-73700	1" / 51 / 18 mm	1/12	pc
S-73703	1,5" / 51 / 18 mm	1/12	pc
S-73706	2" / 57 / 18 mm	1/12	pc
S-73709	2,5" / 57 / 18 mm	1/12	pc
S-73712	3" / 64 / 22 mm	1/12	pc

Flat Paintbrush Wood



- OREL fiber bristles
- maximum absorption of paint
- guarantee to keep the shape and characteristics of the brush
- beech wood handle, lacquered
- for varnishes, stains and wood impregnation

S-73753	1" / 51 / 18 mm	1/12	pc
S-73755	1,5" / 51 / 18 mm	1/12	pc
S-73757	2" / 57 / 18 mm	1/12	pc
S-73759	2,5" / 57 / 18 mm	1/12	pc
S-73761	3" / 64 / 22 mm	1/12	pc

Flat Paintbrush Acryl



- polyester fiber bristles
- high abrasion resistance
- low water absorption
- beech wood handle, lacquered
- for emulsion, acrylic and latex paints

S-73763	1" / 51 / 18 mm	1/12	pc
S-73765	1,5" / 51 / 18 mm	1/12	pc
S-73767	2" / 57 / 18 mm	1/12	pc
S-73769	2,5" / 57 / 18 mm	1/12	pc
S-73771	3" / 64 / 22 mm	1/12	pc

Flat Paintbrush Nitro



- for all kinds of oil and nitro paints

S-73783	1" / 51 / 18 cm	1/12	pc
S-73785	1.5" / 51 / 18 cm	1/12	pc
S-73787	2" / 57 / 18 cm	1/12	pc
S-73789	2.5" / 57 / 18 cm	1/12	pc
S-73791	3"/ 64 / 22 cm	1/12	pc

Round Brush Universal



- for all kinds of oil and nitro paints
- for uneven and large surfaces with lots of nooks and crannies

S-73739	Ø 25 / 51 mm	1/12	pc
S-73742	Ø 30 / 51 mm	1/12	pc
S-73745	Ø 40 / 57 mm	1/12	pc
S-73748	Ø 50 / 57 mm	1/12	pc

Wide Paintbrush Universal



- for emulsion paints
- for uneven and large surfaces

S-73751	180 / 89 / 80 mm	1/6	pc

Paste Brush Universal



- for emulsion paints and enamels
- for uneven and large surfaces

S-73724	90 / 57 / 30 mm	1/12	pc
S-73727	110 / 64 / 30 mm	1/12	pc
S-73730	130 / 64 / 30 mm	1/12	pc
S-73733	140 / 70 / 40 mm	1/12	pc
S-73736	150 / 70 / 50 mm	1/12	pc

Paste Brush Wood



- OREL fiber bristles
- maximum absorption of paint
- guarantee to keep the shape and characteristics of the brush
- beech wood handle, lacquered

S-73773	130 / 57 / 30 mm	1/12	pc
S-73775	110 / 57 / 30 mm	1/12	pc

Radiator Brush Universal



- for all kinds of oil and nitro paints
- for hard-to-reach surfaces

S-73715	1,5" / 51 / 15 mm	1/12	pc
S-73718	2" / 57 / 15 mm	1/12	pc
S-73721	2,5" / 64 / 15 mm	1/12	pc

Paint Roller - Hard Black Acryl



- 100% dense sponge 55 kg/m3
- leaves no air bubbles
- for acrylic and oil paints

S-73890	110 mm	1/50	pc

Plaster Roller



- nylon fiber roller with a fiber length of 18 mm
- ensures a uniform layer thickness
- designed to coat walls and ceilings

S-73923	180 mm	1/5/10	pc
S-73927	250 mm	1/5/10	pc

Paint Roller - Teflon Nitro



- teflon roller
- for enamels, varnishes

S-73917	250 mm	1/24	pc
S-73919	180 mm	1/36	pc

Paint Roller - Velur Nitro



- 100% wool
- excellent paint absorption and application
- leaves a smooth surface
- for painting with varnishes

S-73844	250 mm	1/5/10	pc
S-73846	180 mm	1/5/10	pc
S-73847	150 mm; set 2 pcs	1/25	set
S-73848	100 mm	1/50	pc
S-73849	60 mm; set 2 pcs	1/25	set
S-73850	100 mm	1/50	pc
S-73851	150 mm	1/25	pc

Paint Roller - Silver Green Acryl



- 100% polyamide
- excellent paint absorption and application
- for painting smooth surfaces, natural plasters, plaster coats

S-73822	100 mm	1/50	pc
S-73824	150 mm; set 2 pcs	1/240	set
S-73830	250 mm	1/5/10	pc
S-73832	180 mm	1/5/10	pc

Paint Roller - Nylon Nitro



- 100% polyamide

S-73837	250 mm	1/5/10	pc
S-73838	250 mm	1/5/10	pc
S-73839	180 mm	1/5/10	pc
S-73840	180 mm	1/5/10	pc
S-73842	100 mm	1/50	pc

Paint Roller - Gold Acryl



- 100% polyamide
- made in thermofusion technology
- optimal paint absorption and application
- long service life
- especially for thick-layered latex and silicate paints

S-73901	180 mm	1/10	pc
S-73903	250 mm	1/10	pc
S-73905	100 mm; set 10 pcs	1/50	set

Paint Roller - Silver Black Universal



- professional roller for smooth surfaces
- made in thermofusion technology with specially reinforced polyamide fabric
- made in endless technology that minimizes wiping and hair loss
- very resistant to wear and tear
- leaves a fine structure

S-73862	100 mm	1/50	pc
S-73864	150 mm; set 2 pcs	1/250	set
S-73866	100 mm	1/50	pc
S-73868	150 mm	1/50	pc
S-73870	180 mm	1/5/10	pc
S-73872	250 mm	1/5/10	pc

Paint Roller - Gold Facade Acryl



- 100% polyamide
- roller insert on a sponge
- optimal paint absorption and application
- long service life
- especially for dispersion and silicate paints

S-73909	270 mm	1/10	pc

Paint Roller - Silver Black Facade Universal



- professional roller for uneven surfaces
- made in thermofusion technology with specially reinforced polyamide fabric
- made in endless technology that minimizes wiping and hair loss
- very resistant to wear and tear
- leaves a fine structure
- ideal for emulsion, latex and acrylic paints
- for painting facades and uneven, rough surfaces

S-73874	200 mm	1/5/10	pc
S-73876	270 mm	1/5/10	pc

Paint Roller - Microfibre Wood



- 100% polyester
- excellent paint absorption and application
- for painting smooth surfaces

S-73882	250 mm	1/5/10	pc
S-73884	180 mm	1/5/10	pc
S-73885	150 mm; set 2 pcs	1/25	set
S-73886	100 mm	1/50	pc
S-73887	150 mm	1/25	pc
S-73888	100 mm	1/50	pc

Paint Roller - Microfibre Wood



- microfiber roller
- for impregnations, stain varnishes and latex paints

S-73911	250 mm	1/12	pc
S-73913	180 mm	1/12	pc
S-73915	100 mm; set 10 pcs	1/50	set

Painting Handle 6/100



- two-component handle

S-73877	100 / Ø 6 mm	1/10/40	pc
S-73878	180 / Ø 8 mm	1/10/50	pc
S-73880	250 / Ø 8 mm	1/10/50	pc

Telescopic Pole



- universal tip fitting to most grips available on the market
- rotary working length lock
- aluminum body
- hole in the bottom

S-73856	1.1 - 2.0 m	1/25	pc
S-73859	1.6 - 3.0 m	1/25	pc

Telescopic Pole Block System



- quick attachment switch for the paint holder on a telescope stick

S-73928	2.0 m	1/12	pc

Paint Tray



- made of polypropylene
- ergonomic shape
- 2 paint tanks with dosing channel

S-73920	170 x 300 mm	1/10/100	pc
S-73922	240 x 300 mm	1/10/70	pc

Paint Bucket + Grille For Paint Bucket



- material: polypropylene
- hooks for hanging painting tools
- ergonomic

S-73924	10 L	1	pc
S-73926	300 mm	1/36	pc

Adhesive tapes

Masking tape for spray painting



- versatile painting work, dedicated for spray application

S042138548	30 mm x 50 m	1/40	pc
S042138550	38 mm x 50 m	1/24	pc
S042138553	48 mm x 50 m	1/24	pc

Masking tape for curves and contours



- versatile painting work, for masking curves and contours

S042176641	30 mm x 50 m	1/40	pc
S042176642	38 mm x 50 m	1/24	pc
S042176643	48 mm x 50 m	1/24	pc

Washi precision masking tape



- precise paint edges with no paint bleeding

S042176644	25 mm x 25 m	1/36	pc
S042176645	38 mm x 25 m	1/24	pc
S042176646	30 mm x 50 m	1/32	pc
S042176647	38 mm x 50 m	1/24	pc
S042176648	48 mm x 50 m	1/20	pc
S042176649	38 mm x 50 m ; 3-pack	1/8	set

Washi UV Proof masking tape



- for painting work outdoors and in humid interiors

S042176651	25 mm x 25 m	1/32	pc
S042176653	38 mm x 25 m	1/20	pc
S042176655	38 mm x 50 m	1/24	pc

Washi delicate masking tape



- for delicate surfaces such as wall-paper and freshly painted walls

S042176621	30 mm x 25 m	1/32	pc
S042176622	38 mm x 25 m	1/24	pc
S042176623	38 mm x 50 m	1/24	pc

Automotive masking tape



- automotive painting

S042176624	25 mm x 50 m	1/36	pc
S042176625	38 mm x 50 m	1/24	pc

Professional masking tape



- versatile painting and automotive refinishing work

S042276656	25 mm x 50 m	1/48	pc
S042276658	38 mm x 50 m	1/24	pc
S042276660	48 mm x 50 m	1/24	pc

Plastering masking tape



- plastering work

S042138461	38 mm x 20 m	1/42	pc
S042138462	38 mm x 50 m	1/28	pc
S042138463	48 mm x 20 m	1/36	pc
S042138465	48 mm x 50 m	1/24	pc

Corrugated PVC masking tape



- for protecting PVC, aluminum and wooden joinery

S042238330	30 mm x 25 m	1/54	pc
S042238338	38 mm x 25 m	1/54	pc
S042238348	48 mm x 25 m	1/54	pc

Tiling & plastering masking tape



- for stabilizing tiles and mirrors during tiling work
- for plastering and painting tasks

S042138466	38 mm x 30 m	1/24	pc
S042138467	48 mm x 20 m	1/24	pc
S042138468	48 mm x 30 m	1/24	pc

Exterior masking tape



- for protecting PVC, aluminum and wooden joinery

S042276652	48 mm x 25 m	1/24	pc
S042276654	48 mm x 50 m	1/24	pc

PVC electrical insulation tape



- top quality and flexibility
- resistant to water, frost, UV, oils and chemicals
- self-extinguishing and exceptionally durable
- operating temperature range from -18°C to +105°C
- available in 5 colours: black, white, blue, red, yellow, and in “rainbow” sets

S042276632	0,18 mm x 19 mm x 18 m ; black	1/10/100	pc
S042276631	0,18 mm x 19 mm x 18 m ; white	1/10/100	pc
S042276633	0,18 mm x 19 mm x 18 m ; red	1/10/100	pc
S042276634	0,18 mm x 19 mm x 18 m ; blue	1/10/100	pc
S042276635	0,18 mm x 19 mm x 18 m ; yellow	1/10/100	pc
S042276630	0,18 mm x 19 mm x 18 m ; mix	1/5/100	pc

Foils

Protective film with washi tape



- for protecting surfaces during painting, plastering, finishing and decorative works

S043147621	550 mm x 33 m	1/60	pc
S043147622	1100 mm x 33 m	1/30	pc
S043147623	1400 mm x 20 m	1/30	pc
S043147624	1800 mm x 20 m	1/30	pc
S043147625	2100 mm x 20 m	1/30	pc
S043147626	2700 mm x 20 m	1/30	pc
S043147627	3600 mm x 17m	1/20	pc

Exterior protective film



- for protecting surfaces during plastering, tiling and painting work

S043147673	1100 mm x 20 m	1/30	pc
S043147675	1400 mm x 20 m	1/30	pc
S043147677	1800 mm x 20 m	1/30	pc
S043147679	2700 mm x 20 m	1/60	pc

Protective Film EXTRA STRONG 500



- Very strong, high-quality protective film for professional use
- perfect for intensive renovation and finishing work
- resistant to tearing and abrasion
- durability rating: 5/5
- color: transparent

S034176650	4 m x 5 m ; transparent	1/20	pc

Plastering Film EXTRA STRONG 700



- Very strong plaster foil for protection during plastering and facade work.
- Resistant to mortar, mechanical damage, and external conditions.
- Durability rating: 5/5
- Color: transparent

S043147645	4 m x 5 m ; transparent	1/15	pc

Protective paper with washi tape



- for painting, decorating and varnishing

S043147600	300 mm x 20 m	1/25	pc
S043147601	600 mm x 20 m	1/25	pc
S043147602	900 mm x 20 m	1/25	pc

Waterproof paper with washi tape



- for painting, decorating and varnishing

S043147605	550 mm x 20 m	1/25	pc
S043147606	900 mm x 20 m	1/25	pc

Adhesive tapes

Reinforced repair tape



SUPER STRONG
- bonds, seals, repairs
- strong. waterproof. universal
- durability in every situation
- repair and protect
- versatile and reliable

S042276661	50 mm x 5 m	1/24	pc

Transparent repair tape



TRANSPARENT
- transparent and strong
- invisible repair
- durable and waterproof
- strong protection without marks

S042276662	50 mm x 5 m	1/24	pc

Waterproof sealing repair tape



WATERPROOF
- flexible and waterproof
- seals and protects
- long-lasting protection against water and dust
- resistant to moisture and UV

S042276663	38 mm x 1,5 m	1/20	pc

Double-sided acrylic mounting tape



DUAL ACRYL
- double-sided, transparent strength — replaces glues
- ultra-strong and fully transparent
- long-lasting bonding of metal, glass, wood and plastic
- alternative to rivets, welding and adhesives
- for indoor and outdoor use

S042276664	19 mm x 2 m	1/24	pc

Double-sided foam mounting tape



DUAL FOAM
- double-sided mounting power — easy, clean, durable
- perfect for mirrors, panels and signage
- foam structure ensures strong adhesion
- for indoor and outdoor use

S042276665	19 mm x 5 m	1/48	pc

Anti-slip tape



ANTISLIP
- safety with every step
- anti-slip protection for home and work
- safety on every surface — indoors and outdoors
- strong and reliable — prevents slipping
- safe stairs, floors and ramps — at home and at work
- strong and durable — anti-slip protection for indoor and outdoor use
- ensure stability — anti-slip tape for increased safety

S042276666	25 mm x 5 m	1/36	pc

Hook-and-loop fastening tape



ORGANIZER
- strong and secure fastening
- fire-resistant and versatile
- ideal for cables, tools and camping
- order and convenience in all conditions

S042276667	16 mm x 5 m	1/24	pc

Self-fusing silicone tape




SILICON-FIX
- flexible and self-fusing
- resistant to water and temperature
- perfect for sealing and electrical insulation
- abrasion-resistant and weatherproof

S042276669	25 mm x 3 m	1/16	pc

STALCO





POWER TOOLS

STALCO PERFECT

60 V MAX LITHIUM-ION

XTR

4 YEARS WARRANTY

LINE 60V XTR



The XTR range is a line of machines powered by a 60 V backpack battery, designed for the toughest jobs. With their design and performance, they can handle even the toughest jobs efficiently.

Thanks to advanced technology and high-quality components, XTR machines ensure fast and efficient operation, enabling users to achieve excellent results in a short time.

With dedicated adapters allowing the Slide-In and XTR line of machines to be seamlessly connected, giving users more freedom to use different machines within a single 60 V system.

STALCO PERFECT

60 V MAX LITHIUM-ION

4 YEARS WARRANTY



LINE 60V SLIDE-IN

The 60 V battery system is an advanced power system used in the STALCO PERFECT range of garden equipment.

It offers higher voltage for more power and performance. The equipment powered by this system is able to effectively handle even the most demanding tasks in the garden.

STALCO

3 YEARS WARRANTY



LITHIUM-ION S-VOLT BATTERY SYSTEM

LINE S-VOLT

STALCO S-VOLT is a cordless system that allows powering multiple power tools from a single battery. The batteries are available in several popular capacities and are compatible with a wide range of devices; this sets a new standard for your convenience, space and money savings, and working more efficiently.

The STALCO S-VOLT system is aimed at a wide range of users, both professional and less demanding, who also value quality.

Laser and electronic devices

Laser distance meter DLS50R



Features:
- measuring range: 50 m
- red laser beam
- continuous measurement
- area and volume measurement
- pythagoras function
- addition and subtraction of measurement results
- wall area measurement
- minimum/maximum value
- built-in battery
- USB Type-C charging
- LCD display

Technical data:
- measuring range: 0.05–50 m

S058297002	-	1/20/40	pc

1.4 m tripod TRS-14



Features:
- 4-section height adjustment
- quick-release
- ergonomic handle
- non-slip feet
- built-in bubble level

Technical data:
- mounting thread size: 1/4", 5/8"
- leg sections: 4 sections
- leg lock type: clamp
- head type: ball head
- pan range: 360°
- tilt range: 180°
- side tilt: 90°
- folded length: 50 cm / 19.7"
- min. height: 48 cm / 18.6"
- max. height: 143 cm / 56.3

S058897011	-	1/12	pc

Cross line laser LLS1XG



Features:
- independent horizontal and vertical lines
- beam brightness adjustment
- built-in battery
- USB Type-C charging
- shock-resistant housing

Technical data:
- reference working distance: 30 m
- self-levelling/compensation range: 4° ± 1°
- levelling accuracy: ±3 mm / 10 m
- mounting size: 1/4"

S058597006	-	1/20	pc

3D cross line laser LLS3DG



Features:
- laser beam: Green beam
- battery included
- USB Type-C charging
- additional accessories

Technical data:
- projection: 12 green laser lines
- reference working distance (60–100 LUX): ≥ 20 m
- reference working distance (with laser receiver): ≥ 40 m
- self-levelling/compensation range: 3° ±1°
- levelling accuracy: ±3 mm / 10 m
- mounting size: 1/4"

S058597004	-	1/18	pc

Li-Ion battery 2.6 ah 7.4 V



Technical data:
- type: Li-ion
- voltage: 7.4 V Li-ion
- battery capacity: 2600 mAh
- designed for models: LLS3DG, LLP3DG

S058897031	-	1/8	pc

Cordless equipment

Cordless drill/driver DS20-55BL



Features:
- clutch adjustment ring
- battery charge indicator (on battery)
- on-off switch
- direction of rotation button
- gearshift
- self-clamping handle 13 mm
- two batteries
- charger
- belt holder

Technical data:
- nominal voltage 20 V
- battery type Battery system Li-Ion S-Volt
- speed at no load:
- 1st gear 0-420 rpm
- 2nd gear 0-1400 rpm.
- max Soft/hard torque 35/55 Nm
- chuck jaw opening range 2-13 mm
- weight approx: 0.9 kg
- number of included batteries 2 pcs.
- 2 Ah battery included
- battery charging time 60 min.

S050197310	-	1	pc

Cordless drill/driver DS20-55BL



Features:
- clutch adjustment ring
- on-off switch
- direction of rotation button
- gearshift
- self-clamping handle 13 mm
- included accessories: belt clip

Technical data:
- nominal voltage 20 V
- battery type Battery system Li-Ion S-Volt
- speed at no load:
- 1st gear 0-420 rpm
- 2nd gear 0-1400 rpm.
- max Soft/hard torque 35/55 Nm
- chuck jaw opening range 2-13 mm
- weight approx: 0.9 kg

S050197312	-	1	pc

Cordless drill/driver with impact IDS20-75BL



Features:
- clutch adjustment ring
- work function change ring
- battery charge indicator (on battery)
- on-off switch
- direction of rotation button
- gearshift
- 13 mm metal self-locking handle
- accessories included: two batteries (4 Ah), rapid charger with active cooling (4 Ah), belt clip, extra handle, depth stop, carrying case

Technical data:
- nominal voltage 20 V
- battery type Battery system Li-Ion S-Volt
- speed at no load:
- 1st gear 0-500 rpm
- 2nd gear 0-2000 rpm.
- stroke frequency:
- 1st gear 0-7500 rpm
- second gear 0-300^{00} min^{-1}
- max Soft/hard torque 50/75 Nm
- chuck jaw opening range 1,5-13 mm
- weight approx: 1.62 kg
- number of included batteries 2 pcs.
- 4Ah battery capacity included
- battery charging time 60 min.

S050197314	-	1	pc

Cordless drill/driver with impact IDS20-75BL



Features:
- clutch adjustment ring
- work function change ring
- battery charge indicator (on battery)
- on-off switch
- direction of rotation button
- gearshift
- 13 mm metal self-locking handle
- included accessories: belt clip, auxiliary handle, depth stop

Technical data:
- nominal voltage 20 V
- battery type Battery system Li-Ion S-Volt
- speed at no load:
- 1st gear 0-500 rpm
- 2nd gear 0-2000 rpm.
- stroke frequency:
- 1st gear 0-7500 rpm
- second gear 0-300^{00} min^{-1}
- max Soft/hard torque 50/75 Nm
- chuck jaw opening range 1,5-13 mm
- weight approx: 1.62 kg

S050197316	-	1	pc

Cordless ha mmer drill RHS20-18BL



Features:
- SDS plus tool holder
- mode selector knob
- anti-vibration handle
- continuously adjustable on/off switch
- direction of rotation button
- battery charge indicator (on battery)
- accessories included: two batteries (4 Ah), rapid charger with active cooling (4 Ah), extra handle, depth limiter, carrying case

Technical data:
- nominal voltage 20 V
- battery type Battery system Li-Ion S-Volt
- speed at no load: 0-1400 rpm.
- impact frequency 0-45^{00} min^{-1}
- single impact energy 2.3 J
- chuck type SDS plus
- weight approx: 2.47 kg
- number of included batteries 2 pcs.
- 4 Ah battery capacity included
- battery charging time 60 min.

S050397325	-	1	pc

Cordless angle grinder AGS20-125BL



Features:
- on-off switch
- ventilation inlets
- transmission lock
- guard repositioning system
- battery charge indicator (on battery)
- accessories included: two batteries (4 Ah), rapid charger with active cooling (4 Ah), accessory holder, flange wrench, inner flange, outer flange, carrying case

Technical data:
- nominal voltage 20 V
- battery type Battery system Li-Ion S-Volt
- speed at no load: 8000 rpm.
- max Disc diameter 125 mm
- spindle thread M14
- weight approx: 1.9 kg
- number of included batteries 2 pcs.
- 4Ah battery capacity included
- battery charging time 60 min.

S0504497301	-	1	pc

Cordless ha mmer drill RHS20-18BL



Features:
- SDS plus tool holder
- mode selector knob
- anti-vibration handle
- continuously adjustable on/off switch
- direction of rotation button
- accessories included: additional handle, depth limiter

Technical data:
- nominal voltage 20 V
- battery type Battery system Li-Ion S-Volt
- speed at no load: 0-1400 rpm.
- impact frequency 0-45^{00} min^{-1}
- single impact energy 2.3 J
- chuck type SDS plus
- weight approx. 2.47 kg

S0503397327	-	1	pc

Cordless multitool drill DS20-60Q



Features:
- clutch adjustment ring
- on-off switch
- direction of rotation button
- gearshift
- self-clamping handle 13 mm
- interchangeable head system
- accessories included: additional handle, drill depth stop, belt clip, keyless chuck, eccentric tool holder, angle adapter

Technical data:
- nominal voltage 20 V
- battery type Battery system Li-Ion S-Volt
- speed at no load:
- 1st gear 0-400 rpm
- 2nd gear 0-1500 rpm.
- max Soft/hard torque 40/60 Nm
- 1/4" HEX-type tool holder
- chuck jaw opening range 2-13 mm
- weight approx: 1.4 kg

S0503197318	-	1	pc

Impact wrench ISS20-300BL



Features:
- 1/4" hexagon mount
- direction of rotation button
- continuously adjustable on/off switch
- control panel in the base of the unit
- included accessories: belt clip, PH bit

Technical data:
- nominal voltage 20 V
- battery type Battery system Li-Ion S-Volt
- no-load speed 0-2100 rpm
- impact frequency 0-3200 min^{-1}
- max Torque 300 Nm
- 1/4" HEX-type tool holder
- min. and max. threaded clamping elements M12-M22
- weight approx: 1.2 kg

S050297341	-	1	pc

Cordless angle grinder AGS20-125BL



Features:
- on-off switch
- ventilation inlets
- transmission lock
- guard repositioning system
- battery charge indicator (on battery)
- included accessories:
- additional handle, flange wrench, inner flange, outer flange

Technical data:
- nominal voltage 20 V
- battery type Battery system Li-Ion S-Volt
- speed at no load: 8000 rpm.
- max Disc diameter 125 mm
- spindle thread M14
- weight approx: 1.9 kg
- battery charging time 60 min.

S050497303	-	1	pc

Impact wrench IWS20-300BL



Features:
- 1/4" hexagon mount
- direction of rotation button
- continuously adjustable on/off switch
- control panel in the base of the unit
- included accessories: belt clip

Technical data:
- nominal voltage 20 V
- battery type Battery system Li-Ion S-Volt
- no-load speed 0-2100 rpm
- impact frequency 0-3200 min^{-1}
- max Torque 300 Nm
- tool holder type 1/2" square
- min. and max. threaded clamping elements M12-M22
- weight approx: 1.2 kg

S050297347	-	1	pc

Cordless grinder AGS20-125BLVS



Features:
- brushless motor
- speed control
- soft start
- anti restart function
- overheating protection
- an overload protection

Technical data:
- rated voltage: 20 V
- battery type: Li-Ion S-Volt battery system
- no-load speed: 3000-8500 rpm
- maks. disc diameter: 125 mm
- spindle threads: M14
- weight: approx: 2.38 kg

S050497305	-	1/8	pc

Cordless straight grinder SGS20-26BLVS



Features:
- brushless motor
- speed control
- soft start
- anti restart function
- overheating protection
- an overload protection

Technical data:
- rated voltage: 20 V
- battery type: Li-Ion S-Volt battery system
- no-load speed: 7000-26000 rpm
- diameter of internal spindle: 8 mm
- internal diameter of the chuck: 6 mm
- weight: approx: 2.03 kg

S050497307	-	1/10	pc

Delta DSS20-140 cordless orbital sander



Features
- sanding pad size 147 x 101.5 mm
- dust collection
- soft handle
- speed adjustment
- accessories: 1 x cloth dust bag

Technical data
- rated voltage: 20 V
- battery type: Li-Ion S-Volt battery system
- no-load speed: 7000 - 11000 min^{-1}
- grinding pad size 147 x 101.5 mm

S050497345	-	1	pc

ESS20-125 cordless eccentric sander



Features
- speed regulation
- dust collection
- soft handle
- accessories: 1 x fabric dust bag

Technical data
- rated voltage 20 V
- battery type Li-Ion S-Volt battery system
- no-load speed: 7000-11000 min^{-1}
- sanding pad: 125 mm,
- eccentricity: 2.5 mm

S050497343	-	1	pc

BSS20-457BL cordless belt sander



Features
- brushless motor
- grinding size 75 x 457 mm
- dust collection
- soft handle
- speed regulation
- accessories: 1 x sanding belt 75 x 457 mm, 1 x dust bag, 1 x dust outlet

Technical data
- rated voltage 20 V
- battery type Li-Ion S-Volt battery system
- no-load speed: 120-380 m/min
- grinding size 75 x 457 mm
- weight: 2.28 kg
- safety class: III

S050497335	-	1	pc

Cordless sabre saw RSS20-115CS



Features:
- stepless speed adjustment using the switch
- keyless accessory change
- type D handle
- soft grip
- swivel handle

Technical data:
- rated voltage: 20 V
- battery type: Li-Ion S-Volt battery system
- idling stroke frequency: 0-2800 min^{-1}
- saw blade working stroke: 26 mm
- wood: 115 mm
- steel (profile/tube) 5/60 mm
- weight: approx: 2.64 kg

S050597359	-	1/5	pc

Cordless handheld circular saw CSS20-165BL



Features:
- lockable switch
- second hand holder
- aluminum foot
- cutting depth adjustment
- cutting angle adjustment
- shield
- spindle lock
- LED
- accessories included: saw blade, Allen key, parallel guide, vacuum cleaner connector

Technical data:
- nominal voltage 20 V
- battery type Battery system Li-Ion S-Volt
- no-load speed 4800 rpm.
- max Diameter of saw blade 165 mm
- mounting hole diameter of saw blade 20 mm
- max Thickness of cutting disc 1,6 mm
- max 90 degree cutting depth 57 mm
- max 45 degree cutting depth 41 mm
- max 50 degree cutting depth 37 mm
- weight approx: 2.9 kg

S050697337	-	1	pc

Cordless jigsaw JSS20-85BLVS



Features:
- lockable switch
- speed control
- feed speed changeover switch
- blade lock on the spindle
- saw blade guide
- shoes
- accessories included: plastic socket, allen key

Technical data:
- nominal voltage 20 V
- battery type Battery system Li-Ion S-Volt
- number of strokes at idling speed 700-3000 min^{-1}
- blade working stroke 26 mm
- pendulum stroke Yes
- weight approx: 2.2 kg

S050597331	-	1	pc

Cordless top spindle moulder PRS20-20BLVS



Features:
- brushless motor
- electronic speed stabilisation
- speed adjustment
- smooth start-up
- overload protection

Technical data:
- rated voltage: 20 V
- battery type: Li-Ion S-Volt battery system
- no-load speed: 10,000-30,000 rpm
- inner diameter of the clamping chuck: 6/8 mm
- milling machine body stroke: 20 mm
- weight: approx: 2 kg

S050997363	-	1/6	pc

PLS20-82BL cordless planer



Features
- brushless motor
- dust extraction (right/left)
- soft handle
- adjustable planing depth
- accessories: 1 x parallel guide holder, 1 x edge guide, 1 x depth guide, 1 x wrench, 1 x key storage box, 1 x wing nut, 1 x internal hex wrench, 1 x dust bag, 1 x square head screw M6 x 12, 3 x fi6 flat washer,
- 2 x butterfly screw

Technical data
- rated voltage: 20 V
- battery type: Li-Ion S-Volt battery system
- no-load speed: 16000 min^{-1}
- maximum width planing: 82 mm
- planing depth: 0-2 mm
- grooving depth: 0-8 mm
- weight: 2.86 kg

S051197333	-	1	pc

Battery concrete mixer HMS20-100CS



Features:
- two gears
- overheating protection
- an overload protection
- stepless speed adjustment using the switch
- ergonomically shaped handles

Technical data:
- rated voltage: 20 V
- battery type: Li-Ion S-Volt battery system
- no-load speed: 1st gear 0-510 rpm
- 2nd gear 0-710 rpm
- tool holder: M14
- maks. Mixer diameter: 100 mm
- weight: approx. 3.18 kg

S051797353	-	1/2	pc

Battery heater HGS20-550



Features:
- low weight
- three interchangeable nozzles

Technical data:
- rated voltage: 20 V
- battery type: Li-Ion S-Volt battery system
- heating temperature: 550 degrees C
- airflow: 200 l/min
- weight: 1.3 kg

S051297365	-	1/6	pc

Battery concrete mixer HMS20-120BLCS



Features:
- brushless motor
- two gears
- overheating protection
- an overload protection
- stepless speed adjustment using the switch
- ergonomically shaped handles

Technical data:
- rated voltage: 20 V
- battery type: Li-Ion S-Volt battery system
- no-load speed: 1st gear 0-420 rpm
- 2nd gear 0-710 rpm
- tool holder: M14
- maks. Mixer diameter: 120 mm
- weight: approx. 3.7 kg

S051797355	-	1/2	pc

Package: LMS40-38BL cordless lawnmower



- LMS40-38BL S-97712 cordless lawnmower
- two BLS20-4AH batteries
- S-97383
- BCS20-2X S-97392 double charger

S052397713	-	1	pc

Package: LMS40-46BL cordless lawnmower



- LMS40-46BL S-97716 cordless lawnmower
- two BLS20-8AHP
- S-97387 batteries
- two BCS20-9AP S-97395 chargers

S052397717	-	1	pc

Cordless lawn mower LMS40-38BL



Features:
- brushless motor
- turbo function
- 5 cutting height positions
- mulching function
- handle height adjustment

Technical data:
- rated voltage: 2 x 20 V
- battery type: Li-Ion S-Volt battery system
- cutting width: 38 cm
- blade speed without load: 2800-3400 rpm
- capacity: grass catcher: 40 l
- mowing height: 25-80 mm
- front wheel size: 178 mm
- rear wheel size: 200 mm
- weight: 11.6 kg
- degree of protection: IPX4

S052397712	-	1/1	pc

Cordless lawn mower LMS40-46BL



Features:
- brushless motor
- 6 cutting height positions
- turbo function
- metal housing
- 4-in-1 system mulching, collection, side discharge, rear discharge

Technical data:
- rated voltage: 2 x 20 V
- battery type: Li-Ion S-Volt battery system
- cutting width: 46 cm
- blade speed without load: 2900-3300 rpm
- capacity: grass catcher: 55 l
- cutting height: 25-80 mm
- front wheel size: 200 mm
- rear wheel size: 250 mm
- 4-in-1 system: mulching, bin collection, side discharge, rear discharge
- weight: 22.8 kg
- degree of protection: IPX4

S052397716	-	1/1	pc

Package: LMS40-51BLSP cordless lawnmower



- LMS40-51BLSP S-97718 cordless lawnmower
- two BLS20-8AHP S-97387 batteries
- two BCS20-9AP S-97395 chargers

S052397719	-	1	pc

Lawn mower blade



S053997110	for mower: LMS40-38BL : 38 cm	1	pc
S053997112	for mower: LMS40-46BL : 46 cm	1	pc

Lawn mower blade



- for mowers: LMP60-51BLSP, LMS40-51BLSP

S053998113	51 cm	1	pc

Cordless mower with drive LMS40-51BLSP



Features:
- brushless motor
- 6 cutting height positions
- turbo function
- metal housing
- 4-in-1 system mulching, collection, side discharge, rear discharge
- drive function
- smooth speed adjustment

Technical data:
- rated voltage: 2 x 20 V
- battery type: Li-Ion S-Volt battery system
- cutting width: 51 cm
- blade speed without load: 2900-3300 rpm
- capacity: grass catcher: 60 l
- mowing height: 25-80 mm
- front wheel size: 200 mm
- rear wheel size: 250 mm
- infinitely variable rear-wheel drive
- speed control: 0-5 km/h
- 4-in-1 system: mulching, bin collection, side discharge, rear discharge
- weight: 25.6 kg
- degree of protection: IPX4

S052397718	-	1/1	pc

Cordless grass trimmer LTS20-30



Features:
- low weight
- length adjustment
- swivel head
- guide wheel

Technical data:
- rated voltage: 20 V
- battery type: Li-Ion S-Volt battery system
- no-load speed: 7500 rpm
- line diameter: 1.6 mm
- cutting diameter: 305 mm
- rotating head: Yes Automatic line feed: Yes
- telescopic adjustment: 35 cm
- weight: 1.9 kg

S052397700	-	1/6	pc

Cordless hedge trimmer HTS20-71



Features:
- laser-cut blades
- quiet operation
- low weight
- can be hung on the wall

Technical data:
- rated voltage: 20 V
- battery type: Li-Ion S-Volt battery system
- blade speed: 1200 min^{-1}
- number of strokes: 2400 min^{-1}
- blade length: 61 cm
- cutting length: 51 cm
- thickness of blade: 1.6 mm
- cutting thickness: max 14 mm
- weight: 2.1 kg

S052397706	-	1/4	pc

Cordless boom hedge trimmer PHS20-45



Features:
- length adjustment
- movable head
- laser-cut blades
- swivel handle

Technical data:
- rated voltage: 20 V
- battery type: Li-Ion S-Volt battery system
- blade length: 45 cm
- cutting length: 41 cm
- cutting thickness: max. 16 mm
- length: 2.2-2.75 m
- rotating head -45 to 90 degrees.

S052397708	-	1/4	pc

Cordless secateurs PSS20-30BL



Features:
- protection against accidental start-up
- three modes of operation
- brushless motor
- an overload protection
- soft grip

Technical data:
- rated voltage: 20 V
- battery type: Li-Ion S-Volt battery system
- maks. Cutting force: 2600 N
- maks. diameter of branches: Operating mode 1: 15 mm
- operating mode 2: 25 mm
- operating mode 3: 30 mm
- weight: 1.19 kg

S052397357	-	1/10	pc

Cordless pruning saw PCS20-20



Features:
- oregon chain
- oregon guide
- length adjustment
- automatic lubrication

Technical data:
- rated voltage: 20 V
- battery type: Li-Ion S-Volt battery system
- no-load speed: 22,000 rpm
- no-load chain speed: 4.5 m/s
- guide length: 203 mm (8")
- width of guide groove: 1.3 mm (0.050")
- chain pitch: 3/8"
- number of chain links: 33
- chain type: Oregon 91P033X
- head angle: 0 to 30 degrees
- length: 1.97-2.52 m
- weight 3.3 kg

S052397710	-	1/4	pc

Cordless branch saw CAS20-13



Features:
- guide bar guard
- soft handle
- super light
- accessories: 1 x guide bar guard 1 x chain tensioning wrench, 1 x oiler

Technical data:
- rated voltage: 20 V max.
- chain length: 5" / (127 mm)
- battery type: lithium-ion
- rated power: 500 W
- chain speed without load: 7 m/s
- engine speed without load: 18500 min^{-1}
- chain pitch: 0.30”
- chain spacing: 1.1 mm (0.043”)
- number of drive chain links: 27

S052397725	-	1	pc

Cordless chainsaw CAS20-25BL



Features:
- brushless motor
- oregon bar and chain
- automatic lubrication
- electronic+mechanical brake

Technical data:
- rated voltage: 20 V
- battery type: Li-Ion S-Volt battery system
- no-load speed: 4200 rpm
- no-load chain speed: 7.9 m/s
- chain: OREGON 90PX040X
- chain pitch: 9.525 mm (3/8”)
- chain groove thickness: 1.1 mm (0.043”)
- number of chain links: 40
- guide bar OREGON 575271
- bar length 254 mm (10”)
- chain length 254 mm (10”)
- oil tank capacity: 115 ml
- automatic oil metering: 3-8 ml/min
- weight: 2.8 kg

S052397714	-	1/4	pc

Chainsaw guide



S053997134	for CAS20-25BL chainsaw : 254 mm (10”)	1	pc
S053997130	for CAS20-13 chainsaw : 127 mm (5”)	1	pc
S053997132	for saw PCS20-20 : 203 mm (8”)	1	pc

Chain for a chainsaw



S053997124	for saw CAS20-25BL : 10” / 254 mm : 40 cells : pitch: 0.30” : spacing: 0.043”	1	pc
S053997120	for CAS20-13 chainsaw : 127 mm (5”) : 27 links : pitch: 0.30” : spacing: 0.043”	1	pc
S053997122	for saw PCS20-20 : 8” / 203 mm : 33 links : pitch: 3/8” : spacing: 0.050”	1	pc

Battery-powered sprayer SPS20-500



Features:
- adjustable lance length
- jet control
- shoulder strap

Technical data:
- rated voltage: 20 V
- battery type: Li-Ion S-Volt battery system
- water flow: 0.5l/min
- pressure max: 2 bar
- nozzle diameter: 1.7 mm
- capacity: tank: 7.5 l
- hose length 1.4 m
- lance length: 0.5 m
- weight: 1.95 kg

S051497373	-	1/2	pc

Cordless pressure washer HPS20-24



Features:
- two modes of operation
- suction and pressure pump
- multifunctional nozzle

Technical data:
- rated voltage: 20 V
- battery type: Li-Ion S-Volt battery system
- maks. Feed water pressure: 5 bar
- pressure 1st gear: 1.9 Mpa/19 bar
- 2nd gear pressure: 2.4 Mpa/24 bar
- maximum water flow 1st gear: 160 l/h
- maximum water flow rate 2nd gear: 170 l/h
- water head: 1.5 m
- weight: 1.95 kg

S051997371	-	1/4	pc

Cordless leaf blower BLS20-140



Features:
- stepless speed adjustment using the switch
- low weight

Technical data:
- rated voltage: 20 V
- battery type: Li-Ion S-Volt battery system
- no-load motor speed: 15000 rpm
- air speed: 140 km/h
- airflow: 498 m3
- speed control: Yes
- weight: 1.3 kg

S052397702	-	1/4	pc

Cordless blower ABS20-63



Features:
- two modes of operation
- switch lock
- speed adjustment

Technical data:
- rated voltage: 20 V
- battery type: Li-Ion S-Volt battery system
- no-load speed: 0-18,000 rpm
- air flow: ².56 m3/min
- air velocity: 63.5 m/s
- maximum suction power 4.5 kPa
- capacity: tank: 0.5 l
- weight: 1.76 kg

S052297369	-	1/6	pc

Cordless leaf extractor/blower BVS40-720BL



Features:
- brushless motor
- two modes of operation
- mulching function
- large leaf hopper
- speed adjustment

Technical data:
- rated voltage: 2 x 20 V
- battery type: Li-Ion S-Volt battery system
- no-load motor speed: 8000-12000 rpm
- air speed (blower mode): 234 km/h
- suction power max. (hoover mode): 720 m²
- mulching: 10:1
- tank capacity: 30 L
- weight: 2.9 kg

S052397704	-	1/2	pc

Cordless hoover VCS20-500



Features:
- long operating time
- two modes of operation

Technical data:
- rated voltage: 20 V
- battery type: Li-Ion S-Volt battery system
- maximum suction power: 3.8 kPa
- capacity: tank: 0.5 l
- weight: 1.3 kg

S052297367	-	1/4	pc

SBS40BL battery snow thrower



Features:
- powerful brushless motor
- large wheels, comfortable handle
- light weight
- LED lighting
- simple throw adjustment

Technical data:
- snow removal width: 20” (508mm)
- snow removal height: 10” (254mm)
- engine type: Brushless
- voltage: 2 x 20 V
- speed no load: 2000 rpm
- inlet height: 10.6” (270 mm)
- auger diameter: 6.7” (172 mm)
- throwing distance: up to 8 m
- wheel size: 2 x 8” (203 mm)
- weight: 15.3 kg

S052297730	-	1	pc

Snow blower SHS40BL



Features:
- brushless motor
- ergonomic handles
- lightweight design
- easy to clean and maintain
- resistant to low temperatures
- convenient to transport and store

Technical data:
- motor type: Brushless
- voltage: 2 x 20 V
- no-load speed: 1700 rpm
- snow clearing width: 290 mm
- snow clearing height: 180 mm
- throw distance: up to 5 m
- weight: 6 kg

S052297732	-	1	pc

Rechargeable work light WLS20-3W



Features:
- body switch button
- head adjustment
- on-off switch
- included accessories: belt clip

Technical data:
- nominal voltage 20 V
- battery type Battery system Li-Ion S-Volt
- LED power 3 W
- luminous flux 180-250 lm
- max Head rotation angle 270 degrees
- lighting time approx. (depending on battery capacity):
- 2 Ah 12 h
- 4 Ah 24 h
- weight approx: 0.4 kg

S052497351	-	1	pc

FLS20-20W battery spotlight



Features
- lumen max. 2000 lm
- diode power: 20 W
- 3 lighting modes
- rotatable head: 360°
- hook for hanging
- tripod connector

Technical data
- rated voltage: 20 V
- battery yyp: Li-Ion S-Volt battery system
- diode power: 20 W
- LED efficiency: 100 LM/W
- lumen max.: 2000 LM
- correlated color temperature (CCT): 5700 K
- 3 lighting modes: 2000 LM /1000 LM /FLASH
- weight: 1.4 kg

S052497350	-	1	pc

Rechargeable lamp FLS20-30W



Features:
- stepless brightness adjustment
- efficient LEDs

Technical data:
- rated voltage: 20 V
- battery type: Li-Ion S-Volt battery system
- LED power: 30 W
- LED output: 133 LM/W
- lumens: 400-4000 LM
- luminous angle: 120 degrees
- correlated CCT colour temperature: 6000 K
- CRI Ra: 74
- LED lifetime approx: 50 000 h
- degree of protection: IP 65
- mechanical strength IK 07
- USB output: 5 V/1 A

S052497352	-	1	pc

Tool set



Features:
- Stalco TNS16 S-42205 tool bag
- CSS20-165BL S-97337 cordless hand saw
- JSS20-85BLVS S-97331 cordless jigsaw
- DS20-55BL S-97312 cordless drill/ driver
- USB UCS20 S-97389 charger
- 4 A 20 V 100 W BCS20-4A S-97393 charger
- two 20 V 4 Ah BLS20-4AH S-97383 batteries

S-97375	-	1	pc

Tool set



Features:
- Stalco TNS16 S-42205 tool bag
- RHS20-18BL S-97327 cordless hammer drill
- IDS20-75BL S-97316 cordless impact drill/driver
- AGS20-125BL S-97303 cordless angle grinder
- 4 A 20 V 100 W BCS20-4A S-97393 charger
- two 20 V 4 Ah BLS20-4AH S-97383 batteries

S-97377	-	1	pc

Tool set



Features:
- Stalco TNS16 S-42205 tool bag
- AGS20-125BL S-97303 cordless angle grinder
- DS20-55BL S-97312 cordless drill/ driver
- WLS20-3W S-97351 rechargeable work light
- 4 A 20 V 100 W BCS20-4A S-97393 charger
- two 20 V 4 Ah BLS20-4AH S-97383 batteries

S-97379	-	1	pc

Battery 20 V 2 ah BLS20-2AH



Features:
- battery charge indicator
- vents
- blockade

Technical data:
- nominal voltage 20 V maks.
- capacity 2 Ah (40 Wh)
- weight approx: 0.4 kg

S052697381	-	1	pc

8 ah battery BLS20-8AHP



Features:
- capacity: 8 Ah (160 Wh)
- cell type: 21700
- weight: approx: 0.98 kg

Technical data:
- cell type: 21700
- charge indicator
- vents

S052697387	-	1/8/24	pc

Battery 20 V 4 ah BLS20-4AH



Features:
- battery charge indicator
- vents
- blockade

Technical data:
- nominal voltage 20 V maks.
- capacity 4 Ah (80 Wh)
- weight approx: 0.68 kg

S052697383	-	1	pc

USB charger UCS20



Features:
- LED
- right/left switch
- USB Connectors

Technical data:
- nominal voltage 20 V
- battery type Battery system Li-Ion S-Volt
- output voltage (current)
- USB1 (Type A) 5 V (1 A)
- USB2 (TypeA) 5 V(1 A)
- LED power 0.6 W
- weight approx: 0.1 kg

S052697389	-	1	pc

4 ah battery BLS20-4AHP



Features:
- charge indicator
- vents

Technical data:
- capacity: 4 Ah (80 Wh)
- cell type: 21700
- weight: approx: 0.6 kg

S052697385	-	1/8/24	pc

Charger 2 A 20 V 55 W BCS20-2A



Features:
- battery status indicators
- battery socket

Technical data:
- nominal capacity 55 W
- nominal voltage 220-240 V
- nominal frequency 50/60 Hz
- output voltage 18-20 VDC
- output current 2 A
- weight approx: 0.36 kg
- charger designed for: S-Volt lithium-ion battery system

S052697391	-	1	pc

Double charger BCS20-2X



Features:
- two charging sockets

Technical data:
- rated power 105 W
- rated voltage: 220-240 V
- rated frequency 50/60 Hz
- output voltage 18-20 VDC
- maximum output current 4 A
- weight approx: 0.93 kg
- charger designed for the system: Li-ion S-Volt battery system

S052697392	-	1	pc

Charger 4 A 20 V 100 W BCS20-4A



Features:
- battery status indicators
- battery socket

Technical data:
- nominal capacity 100 W
- nominal voltage 220-240 V
- nominal frequency 50/60 Hz
- output voltage 18-20 VDC
- output current 4 A
- weight approx: 0.54 kg
- charger designed for: S-Volt lithium-ion battery system

S052697393	-	1	pc

9 A charger BCS20-9AP



Features:
- intelligent battery type recognition system
- active cooling
- super fast charging

Technical data:
- rated power 250 W
- rated voltage: 220-240 V
- rated frequency 50/60 Hz
- output voltage 18-20 VDC
- output current 3.6/5.6/9.6 A
- weight approx.: 0.9 kg
- charger designed for the system: Li-ion S-Volt battery system

S052697395	-	1/10	pc

Cordless drill driver DS12-25



Features:
- two functions – drilling/ screwdriving
- 21-stage adjustable clutch
- ergonomic two-component handle
- two gears and infinitely variable speed
- battery charge indicator
- accessories included: charger, 1 x Li-Ion 12V 2 Ah battery

Technical data:
- rated voltage 12 V
- rotational speed without load: 1st gear 0-450 rpm, 2nd gear 0-1600 rpm
- max. torque 25 Nm
- chuck jaw opening range 1.5-10
- drilling capacity: steel 10, wood 10 [mm]
- weight approx: 0.87 kg
- battery charging time 90 min.

S050197108	-	1	pc

Li-Ion 12 V battery



Features:
- lithium-ion battery for maximum service life, minimum self-discharge and no unwanted memory effect
- compact
- intended for: S-97108

Technical data:
- li-Ion 12 V
- 2 Ah

S052697129	-	1	pc

12 V 1.5 A charger



Features:
- quick charger for Li-Ion batteries
- thanks to the charging parameter monitoring system it helps to extend the battery life
- designed for the battery model: S-97129

Technical data:
- voltage 12 V
- charging current 1.5 A
- power 33 W

S052697124	-	1	pc

LED headlamp HLS320



Features:
- 6 lighting modes
- max. beam distance 22 m
- red light function
- strobe function

Technical data:
- light source: COB LED
- power: floodlight 10 W
- max. beam distance: 22 m
- luminous flux:
- focused white light:
- 320 lm – high mode
- 100 lm – medium mode
- 10 lm – low mode
- 30 lm – red light mode
- runtime:
- 3 h – high mode
- 9 h – medium mode
- 97 h – low mode
- 5 h – red light mode
- power supply: 3 x AAA batteries
- protection class: IPX6
- colour temperature: 6500 K

S052497803	-	1/10/40	pc

Rechargeable LED work light WLS1000



Features:
- 5 lighting modes
- max. beam distance 170 m
- adjustable lighting angle
- practical hook
- magnetic base
- USB-C charging port

Technical data:
- max. beam distance: 170 m
- luminous flux:
- 25, 550, 1000 lm – focused light
- 90, 480 lm – diffused light
- runtime:
- 3 h - 116 h – focused light
- 6.5 h - 29 h – diffused light
- power supply: 3.7 V / 4200 mAh battery
- protection class: IP65
- charging time: 3 h
- colour temperature: 6500 K

S052497807	-	1/8/24	pc

Rechargeable LED work light WLS800



Features:
- 3 lighting modes
- max. beam distance 38 m
- adjustable lighting angle
- practical hook
- magnetic base
- USB-C charging port

Technical data:
- max. beam distance: 38 m
- luminous flux:
- 280 lm – medium light
- 800 lm – high light
- 20 lm – low light
- runtime:
- 10 h – medium focused light
- 5 h – high focused light
- 145 h – low focused light
- power supply: 3.7 V / 4500 mAh battery
- protection class: IPX5
- charging time: 3 h
- colour temperature: 6500 K

S052497809	-	1/8/24	pc

Set of rechargeable LED work lights WLS1000 + WLS800



S052497811	-	1/6/12	pc

Construction spotlight 50 W FLS-50W



Features:
- stable tripod
- protection class IP65
- high colour rendering index
- wide light beam angle
- long-life LEDs
- neutral light colour
- low weight
- tripod height adjustment

Technical data:
- supply voltage: 100-240 V~ 50/60 Hz
- rated power: 50 W
- luminous flux: 4500 lm
- correlated CCT colour temperature: 5000 K
- CRI Ra: 80
- light angle: 120 degrees
- operating temperature: -25 °C to +45 °C
- IP degree of protection: IP 65
- tripod rotation angle: 360 degrees
- power cable length: approx. 3 m
- minimum and maximum adjustable stand height: 60/180 cm
- LED lifetime: 30 000 h
- energy class: F
- weight: 2.6 kg

S055897810	-	1/2	pc

Construction spotlight 2 x 50 W FLS-100W



Features:
- stable tripod
- two light sources
- protection class IP65
- high colour rendering index
- wide light beam angle
- long-life LEDs
- neutral light colour
- low weight
- tripod height adjustment

Technical data:
- supply voltage: 100-240 V~ 50/60 Hz
- rated power: 100 W (2 x 50 W)
- luminous flux: 9000 lm (2 x 4500 lm)
- correlated CCT colour temperature: 5000 K
- CRI Ra: 80
- light angle: 120 degrees
- operating temperature: -25 °C to +45 °C
- IP degree of protection: IP 65
- tripod rotation angle: 360 degrees
- power cable length: approx. 3 m
- minimum and maximum adjustable stand height: 60/180 cm
- LED lifetime: 30 000 h
- energy class: F
- weight: 3.4 kg

S055897812	-	1/2	pc

Construction spotlight 2 x 100 W FLS-200W



Features:
- stable tripod
- two light sources
- protection class IP54
- high colour rendering index
- wide light beam angle
- long-life LEDs
- neutral light colour
- low weight
- tripod height adjustment
- two power sockets
- separate switch for each light source

Technical data:
- supply voltage: 100-240 V~ 50/60 Hz
- rated power: 200 W (2 x 100 W)
- luminous flux: 20 000 lm (2 x 1000 lm)
- correlated CCT colour temperature: 5000 K
- CRI Ra: 80
- light angle: 120 degrees
- operating temperature: -25 °C to +45 °C
- IP degree of protection: IP54
- tripod rotation angle: 360 degrees
- power cable length: approx. 3 m
- minimum and maximum adjustable stand height: 65/185 cm
- LED lifetime: 30 000 h
- energy class: E
- maximum power consumption from sockets: 3840 W
- number of power outlets: 2 pcs. Weight: 5.1 kg

S055897814	-	1/2	pc

Tripod 1.6 m TRS-16



Features:
- stable base
- height adjustment

Technical data:
- height adjustment: 60/180 cm
- weight: approx. 1.8 kg

S053997816	-	1/10	pc

Headlight cover TNS-1



Features:
- material type: Oxford 600D double layer

Technical data:
- designed for the lights: FLS-200W

S053942213	-	1/20	pc

Headlight cover TNS-2



Features:
- type of material: Oxford 600D double layer

Technical data:
- designed for the lights: FLS-50W & FLS-100W

S053942215	-	1/20	pc

Powered tools

Impact drill 600 W IDS13VS



Features:
- on/off switch lock
- on/off switch (speed control on the switch)
- change mode button
- key holder
- accessories included: drill depth stop, extra drill chuck, drill chuck wrench

Technical data:
- nominal capacity 600 W
- nominal voltage 230V
- current consumption at 220-230 V 2 .8 A
- no-load speed 0-2800 min^{-1}, Impact frequency 0-44800 min^{-1}
- weight 1.7 kg
- power cord: 2 m
- handle type Rim handle
- tightening range of chuck 1,5-13 mm

S054197215	-	1	pc

Impact drill 810 W IDS16KVS



Features:
- on/off switch lock
- on/off switch (speed control on the switch)
- change mode button
- keyless grip
- aluminum gearbox housing
- accessories included: drill depth stop, additional handle

Technical data:
- nominal capacity 810 W
- nominal voltage 220-230 V
- nominal frequency 50/60 HZ
- current 3.9 A
- no-load speed 0-2800 rpm
- stroke rate 0-44800 strokes/min
- jaw opening range of drill chuck 1.5-13 mm
- weight approx. 2.3 kg
- protection class II
- length of power cord 2.5 m

S054197217	-	1	pc

Impact drill 1050 W IDS20-2VS



Features:
- on/off switch lock
- on/off switch (speed control on the switch)
- mode selector knob
- gear selector
- keyless grip
- aluminum gearbox housing
- accessories included: drill depth stop, extra drill chuck, drill chuck wrench

Technical data:
- nominal capacity 1050 W
- nominal voltage 230 V
- nominal frequency 50/60 HZ
- current 4.8 A
- speed at no load:
- 1st gear 0-1200 rpm
- 2nd gear 0-2800 rpm.
- stroke frequency:
- 1 gear 0-19200
- 2nd gear 0-44800 bpm
- jaw opening range of drill chuck 1.5-13 mm
- weight approx. 2.9 kg
- protection class II
- length of power cord 3 m

S054197219	-	1	pc

Rotary impact hammer SDS plus RH36VS



Features:
- 3 Operating modes plus chisel adjuster with 8 positions
- speed control
- the gear housing made of magnesium alloy
- a safety clutch
- the 1500 W motor allows drilling with drill bits up to 36 mm in diameter as well as with concrete saws without loss to drilling performance.
- a 4-metre long power cord
- accessories included: 1 x SDS plus 8 x 150 mm drill bit, 1 x SDS plus 10 x 150 mm drill bit, 1 x SDS plus 12 x 150 mm drill bit, SDS plus pointed chisel 250 mm, Flat chisel 14 x 250, extra handle, Drilling depth stop, Chuck grease, Dust protection.

Technical data:
- type of chuck: SDS plus
- rated voltage: 220-240 V ~
- rated frequency: 50 Hz
- rated Input Power: 1500 watts
- rated speed without load: 0-920 r / min
- impact factor: 0-4100 BPM
- impact energy: 5.5 J
- weight (without accessories) approx. 5.4 kg
- protection Class II
- power cord length: 4M
- noise level: 100.46 db

S054297506	-	1	pc

SDS plus hammer drill RHS26



Features:
- SDS plus handle
- auxiliary handle lock
- safety pin for operating mode switch
- switch plus operating modes
- direction of rotation button
- continuously adjustable on/off switch
- switch lock
- swivelable power cord protector
- included accessories:
- 1 x SDS plus 6 x150 drill bit, 1 x SDS plus 8 x150 drill bit, 1 x SDS plus 10 x 150 drill bit, pointed chisel, flat chisel 14 x 250. 13 mm key chuck adapter +, additional handle, drill depth stop.

Technical data:
- nominal capacity 800 W
- nominal voltage 220-240 V
- nominal frequency 50/60 Hz
- handle type: SDS plus
- no-load speed 0-1450 rpm.
- stroke frequency: 0-5900 beats per minute
- impact energy: 2.8 J
- weight approx. 2.8 kg
- length of power cord 3 m
- protection class II

S054297157	-	1	pc

SDS max RH40 rotary impact hammer



Features:
- 2 Operating modes plus chisel adjuster with 8 positions
- a safety clutch
- the gear housing made of magnesium alloy
- a convenient additional handle located close to the tool chuck
- accessories included: 1 x SDS max 16 x 320 mm drill bit, 1 x SDS max 18 x 320 mm drill bit, 1 x SDS max 22 x 320 mm drill bit, SDS max 350 mm pointed chisel, 25 x 350 mm flat chisel, Extra handle, Drilling depth stop, Chuck grease, Dust protection

Technical data:
- SDS max
- rated voltage 230 V-240 V
- rated frequency 50 Hz
- rated input power 1250 W
- rated speed without load 410 r / min
- impact rate 3100 BPM
- impact energy 10 J
- maks. drilling diameter:
- concrete 40 mm
- weight (without accessories) approx. 6.6 kg
- protection Class II
- power cord length: 4M
- noise level: 108 db

S054297509	-	1	pc

Demolition hammer SDS max DH10J



Features:
- 12 The gradual adjustment of the chisel position
- switch with interlock function in „ON" mode
- the gear housing made of magnesium alloy
- anti-dust motor cover
- due to its low weight, small size and high impact energy, the device is an extremely efficient work tool
- accessories included: 1 x Pointed Chisel 350 mm, 1 x Flat Chisel 25 x 350 mm, Chuck grease, Extra handle, Dust protection, 1 x set of carbon brushes.

Technical data:
- type of chuck SDS max
- rated voltage 220-240 V ~
- rated frequency 50 Hz
- rated input power 1050 W.
- impact factor maks. 2100 BPM
- impact energy 10.0 J
- weight (without accessories) approx. 5.3 kg
- protection Class II
- power cord length: 4M
- noise level: 105 dB

S054297520	-	1	pc

Angle grinder AG125



Features:
- disc diameter 125 mm
- the "anti-restart" system prevents restart in case of power failure
- the "Soft Start" system limits the inrush current, in order to avoid sudden current surges and jerking on start-up.
- accessories included: extra handle, protective cover, external flange key, internal flange, external flange, 1 x set of carbon brushes

Technical data:
- rated voltage: 230 V
- rated frequency: 50 HZ
- power: 750 W
- rotation speed: 11,000 rpm
- disc Diameter: 125 mm
- thread Type: M14
- protection Class: II
- power cord length: 2M
- weight: 2 kg

S054397098	-	1	pc

SDS max demolition ha mmer DHS20J



Features:
- SDS Max tool holder
- auxiliary handle
- lockable switch
- chisel adjustment ring
- included accessories: 1 x sharp chisel 350 mm, 1 x flat chisel 25 x 350 mm, 1 x grease for working handle, 1 x additional handle

Technical data:
- nominal capacity 1300 W
- nominal voltage 230-240 V
- nominal frequency 50 Hz
- handle type: SDS Max
- stroke frequency: 2400 bpm
- impact energy: 20 J
- weight approx. 7.5 kg
- length of power cord 4 m
- protection class II

S054297522	-	1	pc

Angle grinder AG125Q



Features:
- disc diameter 125 mm
- the "anti-restart" system prevents restart in case of power failure
- the "Soft Start" system limits the inrush current, in order to avoid sudden current surges and jerking on start-up.
- a quick-release blade guard allows for tool-free adjustment and quick adaptation of the device to the specific task
- special design ventilation inlets and anti-dust protection of the rotor and stator allow you to work in very dusty environments.
- accessories included: extra handle, protective cover, external flange key, internal flange, external flange, 1 x set of carbon brushes

Technical data:
- rated voltage: 230 V
- rated frequency: 50 HZ
- power: 1100 W
- rotation speed: 1100 rpm
- disc Diameter: 125 mm
- thread Type: M14
- protection Class: II
- power cord length: 3M
- weight: 2.3 kg

S054397200	-	1	pc

Angle grinder AG230



Features:
- disc diameter 230 mm
- the “anti-restart” system prevents restart in case of power failure
- the “Soft Start” system limits the inrush current, in order to avoid sudden current surges and jerking on start-up.
- a 270-degree adjustable handle allows you to perfectly adjust the working position to the specific task.
- accessories included: extra handle, protective cover, external flange key, internal flange, external flange, 1 x set of carbon brushes

Technical data:
- rated voltage: 230 V
- rated frequency: 50 HZ
- power: 2400 W
- rotation speed: 6000 rpm
- disc Diameter: 230 mm
- thread Type: M14
- protection Class: II
- power cord length: 3M
- weight: 5.7 kg

S054397106	-	1	pc

Random orbital sander 450 W ESS150VS



Features:
- adjustable switch
- velcro foot
- bag
- additional hand grip for second hand
- accessories included: dust bag, 2x abrasive paper

Technical data:
- nominal capacity 450 W
- nominal voltage 220-240 V
- nominal frequency 50/60 Hz
- current 1.9 A
- no-load speed 4000-13000 rpm.
- no-load oscillation frequency 8000-26000 min^{-1}
- eccentricity 2 mm
- diameter of sanding pad 150 mm
- weight approx. 2.4 kg
- protection class II
- length of power cord 2 m

S054397262	-	1	pc

Random orbital sander 240 W ESS125



Features:
- on-off switch
- velcro foot
- bag
- accessories included: dust bag, 2 x abrasive paper

Technical data:
- nominal capacity 240 W
- nominal voltage 220-230 V
- nominal frequency 50/60 Hz
- current 1 A
- no-load speed 12000 rpm.
- no-load oscillation frequency 24000 rpm.
- eccentricity 2 mm
- diameter of sanding pad 125 mm
- weight approx. 1.5 kg
- protection class II
- length of power cord 2 m

S054397260	-	1	pc

ESS150BLVS eccentric sander



Features:
- brushless motor
- sanding disc diameter 150 mm
- eccentricity 5 mm
- speed regulation
- dust removal
- accessories: 6 x sandpaper (grit: 80-100-120-150-180-220), 2 x adapter, 1 x suction hose 4 m, 1 x wrench, 1 x case

Technical data:
- rated power: 350 W
- abrasive disc: 150 mm
- rated voltage [V]: 230
- frequency [Hz]: 50
- eccentricity [mm]: 5
- no-load speed n0 [min^{-1}]: 4000-10000
- cable length : 5 m
- weight: 1.5 kg
- suction hose: 4 m
- hose diameter: 32 mm

S054397261	-	1	pc

DWS225BL plaster grinder




Features:
- brushless motor
- LED lighting
- speed regulation
- foldable boom
- dust collection
- accessories: 6 x sandpaper (grit: 80-100-120-150-180-220), 3 x vacuum cleaner adapter, 1 x 4 m suction hose, 1 x hex key, 1 x screwdriver, 1 x suitcase, 1 x hard sanding pad

Technical data:
- rated power: 500W
- sanding pad: 225 mm
- rated voltage [V]: 230
- frequency [Hz]: 50
- no-load speed n0 [min^{-1}]: 900- 2100
- weight [kg]: 2.91
- device length [mm]: 1260/2000
- protection class: I
- cable length: 5 m

S054397264	-	1	pc

150 mm soft interface pad




Features:
- flexible design for gentle sanding
- reduced risk of scratches and burn-through
- ideal for sanding rounded and irregular surfaces

Technical data:
- diameter: 150 mm
- type: Soft
- application: Random orbital sanders

S053997200	-	1/100	pc

150 mm hard sanding pad



Features:
- strong adhesion of sanding discs
- even pressure distribution

Technical data:
- diameter: 150 mm
- type: Hard
- application: Random orbital sanders

S053997202	-	1/100	pc

225 mm soft sanding pad



Features:
- strong adhesion of sanding discs
- flexibility for adapting to surface shape
- ideal for precise finishing of fillers and plasters

Technical data:
- diameter: 225 mm
- type: Soft
- application: Drywall sanders

S053997204	-	1/25	pc

225 mm hard sanding pad



Features:
- strong adhesion of sanding discs
- even pressure distribution
- ideal for sanding fillers and plasters

Technical data:
- diameter: 225 mm
- type: Hard
- application: Drywall sanders

S053997206	-	1/25	pc

Planer WCS30



Features:
- cutting depth adjustment
- cutting width adjustment
- connection to vacuum cleaner
- on/off switch lock
- guide wheel
- included accessories: 2 x diamond cutting discs, flange wrench, hex key, hex key with handle, chisel, carbon brush set, support handle, vacuum cleaner adapter

Technical data:
- nominal capacity 1500 W
- nominal voltage 230-240 V
- nominal frequency 50 Hz
- current intensity 7 A
- nominal speed 8500 rpm.
- cutting disc diameter 125 mm
- blade opening diameter 22.23 mm
- maximum thickness of cutting disc 2,2 mm
- cutting depth 5-29 mm
- cutting width 8-30 mm
- spindle thread size M14
- weight approx. 4.85 kg
- length of power cord 3 m
- protection class II

S054397212	-	1	pc

Jigsaw 550 W JSS65VS



Features:
- variable speed switch
- forward switch
- connector for vacuum cleaner
- foot adjustment
- blade lock on the spindle
- included accessories: 1 x saw blade, 1 x Allen wrench, 1 x vacuum cleaner adapter

Technical data:
- nominal capacity 550 W
- nominal voltage 220-230 V
- nominal frequency 50/60 Hz
- current 2.4 A
- number of strokes at idling speed 700-3000 min^{-1}
- working stroke of blade 18 mm
- maximum body tilt angle (left/right) 45/45 degrees
- weight approx. 2 kg
- protection class II
- length of power cord 2 m

S054497230	-	1	pc

1010 W reciprocating saw RSS1010VS



Features:
- on/off switch with lock and speed control
- foot adjustment
- blade lock on the spindle
- rubber boot
- included accessories: 1x saw blade

Technical data:
- nominal capacity 1010 W
- nominal voltage 220-230 V
- nominal frequency 50/60 Hz
- current 4 A
- number of strokes at idling speed 300-2400 min^{-1}
- working stroke of blade 28 mm
- weight approx. 3.7 kg
- protection class II
- length of power cord 3 m

S054497250	-	1	pc

Jigsaw 710 W JSS85VS



Features:
- lockable switch
- speed control
- forward switch
- connector for vacuum cleaner
- foot adjustment
- blade lock on the spindle
- included accessories: 1 x saw blade, hex key, two thumb screws for guide bar, locating pin, parallel/round cutting guide, guide bar, vacuum cleaner adapter.

Technical data:
- nominal capacity 710 W
- nominal voltage 220-230 V
- nominal frequency 50/60 Hz
- current 3.1 A
- number of strokes at idling speed 700-3000 min^{-1}
- working stroke of blade 26 mm
- maximum body tilt angle (left/right) 45/45 degrees
- weight approx. 2.9 kg
- protection class II
- length of power cord 2.5 m

S054497232	-	1	pc

Handheld circular saw 1200 W CSS165



Features:
- lockable switch
- second hand holder
- cutting depth adjustment
- cutting angle adjustment
- shield
- connection to vacuum cleaner
- included accessories: 1 x cutting blade, wrench, parallel guide, vacuum cleaner adapter

Technical data:
- nominal capacity 1200 W
- nominal voltage 220-230 V
- nominal frequency 50/60 Hz
- current 5 A
- no-load speed 5500 rpm.
- min. saw blade diameter 160 mm
- maks. saw blade diameter 165 mm
- mounting hole diameter of saw blade 20 mm
- maks. blade thickness 2 mm
- maks. depth of cut at 90 degrees: 54 mm
- maks. cutting depth 45 degrees: 38 mm
- weight approx. 3.9 kg
- protection class II
- length of power cord 3 m

S054597238	-	1	pc

Handheld circular saw 1500 W CSS190



Features:
- lockable switch
- second hand holder
- cutting depth adjustment
- cutting angle adjustment
- shield
- connection to vacuum cleaner
- included accessories: 1 x cutting blade, wrench, parallel guide, vacuum cleaner adapter

Technical data:
- nominal capacity 1500 W
- nominal voltage 220-230 V
- nominal frequency 50/60 Hz
- current 6.8 A
- no-load speed 5500 rpm.
- min. saw blade diameter 185 mm
- maks. saw blade diameter 190 mm
- mounting hole diameter of saw blade 20 mm
- maks. blade thickness 2 mm
- maks. depth of cut at 90 degrees: 66 mm
- maks. cutting depth 45 degrees: 46 mm
- weight approx. 4.4 kg
- protection class II
- length of power cord 3 m

S054597240	-	1	pc

Tanners 1800 W HGS550



Features:
- switch with three-stage adjustment
- accessories included: scraper, flat nozzle, deflection nozzle, rebound nozzle, spot nozzle.

Technical data:
- nominal capacity
- (stage 1/2/3) 100/800/1800 W
- nominal voltage 220-240 V
- nominal frequency 50/60 Hz
- temperature (degree 1/2/3) 50/450/550 degrees C
- air flow (stage 1/2/3) 250/250/500 l/min
- weight approx. 0.7 kg
- protection class II
- length of power cord 2 m

S055097281	-	1	pc

Metal cutting machine 2400 W MCS355



Features:
- shield
- spindle lock
- lockable switch
- transport lock
- vice with cutting angle
- accessories included: Allen wrench, carbon brush set, metal cutting wheel

Technical data:
- voltage 220-240 V / 50 Hz
- nominal input power: 2400 W
- speed at no load: 4300r/min
- blade diameter: Ø 355 mm
- blade mounting diameter 25.4 mm
- power cord length: 2 m

S054597630	-	1	pc

Tanners 2000 W HGS650E



Features:
- switch with two-stage control
- LED screen with control panel
- additional hand protection
- accessories included: scraper, flat nozzle, deflection nozzle, rebound nozzle, spot nozzle.

Technical data:
- nominal capacity
- (stage 1/2) 100-140/100-2000 W
- nominal voltage 220-240 V
- nominal frequency 50/60 Hz
- temperature (degree 1/2) 50/ 50-650 degrees C
- air flow rate (stage 1/2) 250-500/ 250-500 l/min
- weight approx. 0.9 kg
- protection class II
- length of power cord 2 m

S055097283	-	1	pc

Mixer HM18SC



Features:
- 2-gears
- smooth switch-operated electronic speed control allows you to adjust the speed of the device to the task.
- protection against accidental activation.
- accessories included: Stirrer diameter 140 x 590, 2 x flat wrench for mounting the stirrer

Technical data:
- rated voltage: 230 V
- rated frequency: 50 HZ
- power: 1800 W
- rotation speed: 1 gear 0-440 / 2 gear 0-780 rpm
- thread type: M14
- protection Class: II
- power cord length: 3M
- weight: 4.6 kg

S055197541	-	1	pc

Wet & dry construction vacuum cleaner VCS30SC



Features:
- wet and dry operation
- semi-automatic filter cleaning system
- 30 L metal tank
- 2000 W power outlet
- dust level indicator
- water drain from the tank
- HEPA filter
- power outlet with automatic synchronization function

Technical data:
- rated voltage: 220–240 V
- frequency: 50–60 Hz
- rated power: 1200 W
- suction power: 17 kPa
- air flow: 30 l/s
- tank capacity: 30 L
- suction hose diameter: 35 mm
- suction hose length: 3 m
- sound power level dB(A): 90
- power cord length: 6 m
- weight: 11.8 kg

S055697168	-	1	pc

Wet & dry construction vacuum cleaner VCS20PS



Features:
- wet and dry operation
- 20 L metal tank
- HEPA filter
- foam filter

Technical data:
- rated voltage: 220–240 V
- frequency: 50–60 Hz
- rated power: 1200 W
- suction power: 17 kPa
- air flow: 30 l/s
- tank capacity: 30 L
- suction hose diameter: 35 mm
- suction hose length: 3 m
- sound power level dB(A): 90
- power cord length: 6 m
- weight: 11.8 kg

S055697166	-	1	pc

VCS30AC construction vacuum cleaner



Features:
- wet/dry operation
- automatic filter shaking
- tank PP
- large wheels
- automatic synchronization socket
- two engine cooling fans
- HEPA filter
- telescopic tube
- accessories: 1 x non-woven bag, 1 x metal telescopic tube, 1 x floor brush, 1 x flat suction nozzle , 1 x suction hose 3 m, 2 x adapter for power tools, 1 x HEPA filter

Technical data:
- power: 1600 W
- suction power: 20 kPa
- socket: 2000 W
- rated voltage: 220-240 V
- frequency: 50-60 Hz
- tank capacity: 30 L
- hose diameter : 32 mm
- sound volume: 82 dB
- weight: 14.5 kg
- power cord length: 7.5 m
- suction hose: 3 m
- class I
- IPX4

S055697170	-	1	pc

Paper bags set of 5 pcs.



- for the VCS30AC vacuum cleaner

S053997186	-	1/12	pc

Non-woven bag, set of 5 pcs.



- for the VCP35LAC / VCP35MAC vacuum cleaner

S053997193	-	1/28	pc

Fabric filter for VCS20PS vacuum cleaner



S053997187	-	1/15	pc

Paper bags set of 5 pcs.



- for the VCS30AC vacuum cleaner

S053997180	-	1	pc

Non-woven bag



S053997188	for the VCS20PS vacuum cleaner	1/10	pc
S053997195	for the VCS30SC vacuum cleaner	1/10	pc

Non-woven bag



- for the VCS30AC vacuum cleaner

S053997182	-	1	pc

HEPA filter



S053997190	for the VCS20PS vacuum cleaner	1/28	pc
S053997197	for the VCS30SC vacuum cleaner	1/5	pc

HEPA filter



- for the VCS30AC vacuum cleaner

S053997184	-	1	pc

EHS 2000 heater



Features:
- ceramic heating element (PTC)
- double thermal protection
- power indicator light
- 3 operating modes
- quiet operation
- metal housing

Technical data:
- voltage: 220-240 VAC 50 Hz
- heating setting: 25/1000/2000 W
- heating surface: 20 m²
- air capacity: 197 m³/h
- PTC heating element
- double overheating protection
- power indicator light

S055497640	-	1	pc

350 W grass trimmer LTS25



Features:
- low weight
- length adjustment
- adjustable head
- 90° rotating head
- adjustable handle

Technical data:
- rated voltage: 230–240 V
- frequency: 50 Hz
- rated power: 350 W
- cutting width: 25 cm
- line diameter: 1.3 mm
- no-load speed: 9800–11200 min⁻¹
- weight: 2.9 kg

S055297683	-	1/4	pc

EHS 3000 heater



Features:
- ceramic heating element (PTC)
- double thermal protection
- power indicator light
- 3 operating modes
- quiet operation
- metal housing

Technical data:
- voltage: 220-240 VAC 50 H
- heating setting: 2000/3000 W
- heating surface: 30 m²
- air capacity: 238 m³/h
- PTC heating element
- double overheating protection
- power indicator light

S055497642	-	1	pc

600 W grass trimmer LTS30



Features:
- low weight
- length adjustment
- adjustable head
- 90° rotating head
- guide wheel
- adjustable handle

Technical data:
- rated voltage: 230–240 V
- frequency: 50 Hz
- rated power: 600 W
- cutting width: 30 cm
- line diameter: 1.6 mm
- no-load speed: 9600–10600 min⁻¹
- weight: 2.9 kg

S055297685	-	1/4	pc

Trimmer head for LTS25



- head suitable for trimmer LTS25

S053997103	-	1/4	pc

Trimmer head for LTS30



- head suitable for trimmer LTS30

S053997101	-	1/4	pc

450 W hedge trimmer HTS40



Features:
- hanging hole
- laser-cut blades
- hand guard
- double safety switch
- soft grip

Technical data:
- voltage: 230–240 V
- frequency: 50 Hz
- rated power: 450 W
- strokes per minute: 1750 SPM
- no-load speed: 1750 min^{-1}
- blade length: 450 mm
- blade thickness: 1.5 mm
- max. cutting length: 400 mm
- max. cutting capacity: 16 mm
- weight: 2.5 kg

S055297687	-	1/4	pc

600 W hedge trimmer HTS55



Features:
- laser-cut blades
- hand guard
- double safety switch
- rotating handle
- soft grip

Technical data:
- voltage: 230–240 V
- frequency: 50 Hz
- rated power: 600 W
- strokes per minute: 1700 SPM
- no-load speed: 1700 min^{-1}
- blade length: 610 mm
- blade thickness: 1.5 mm
- max. cutting length: 550 mm
- max. cutting capacity: 20 mm
- weight: 3.2 kg

S055297689	-	1/4	pc

1400 W lawn mower LMS34



Features:
- central cutting height adjustment
- grass box fill indicator
- handle height adjustment

Technical data:
- voltage: 230–240 V
- frequency: 50 Hz
- rated power: 1400 W
- no-load speed: 3500 min^{-1}
- cutting width: 34 cm
- cutting height: 20–70 mm
- grass box capacity: 30 L
- protection rating: IPX4
- weight: 10.03 kg

S055297691	-	1	pc

1800 W lawn mower LMS40



Features:
- central cutting height adjustment
- grass box fill indicator
- mulching function
- handle height adjustment

Technical data:
- voltage: 230–240 V
- frequency: 50 Hz
- rated power: 1800 W
- no-load speed: 3500 min-1
- cutting width: 40 cm
- cutting height: 25–75 mm
- grass box capacity: 40 L
- protection rating: IPX4
- weight: 13.25 kg

S055297693	-	1	pc

Lawn mower blade



S053997114	for mower: LMS34; 34 cm	1	pc
S053997116	for mower: LMS40; 40 cm	1	pc

1500 W 2-in-1 lawn scarifier LSS2in1



Features:
- 2-in-1 – scarifying, aerating
- interchangeable drum
- central height adjustment

Technical data:
- rated voltage: 230–240 V
- frequency: 50 Hz
- rated power: 1500 W
- working width: 36 cm
- protection class: II
- protection rating: IPX4
- no-load speed: 3500 min^{-1}
- working depth: -12, -9, -6, -3, +3, +10 mm
- grass catcher capacity: 45 L
- weight: 13.7 kg

S055297695	-	1	pc

1600 W 4-in-1 lawn scarifier LSS4in1



Features:
- 4-in-1 – scarifying, aerating, leaf collection, sweeping
- central height adjustment
- interchangeable drum

Technical data:
- rated voltage: 230 V
- frequency: 50 Hz
- rated power: 1600 W
- working width: 38 cm
- working depth range: +8 mm to -12 mm
- no-load speed (scarifying/aerating drum): 3500–4000 min^{-1}
- no-load speed (sweeping/leaf collection drum): 800–1000 min^{-1}
- grass catcher capacity: 50 L
- protection rating: IPX4
- weight: 13.4 kg

S055297681	-	1	pc

2800 W garden shredder GSS45



Features:
- brushless motor
- reverse gear
- quiet operation
- overload protection
- easy to transport

Technical data:
- rated voltage: 230–240 V
- frequency: 50 Hz
- rated power: 2800 W
- no-load speed: 42 min^{-1}
- protection rating: IPX4
- max. branch thickness: 45 mm
- container capacity: 60 L
- wheel size: Ø 200 mm
- weight: 28.5 kg

S055297697	-	1	pc

High-pressure cleaner HPC150A



Features:
- brush motor with copper winding
- aluminium suction-and-pressure pump
- total Stop system
- quick connect system
- thermal Protection
- built-in detergent tank
- chemical dosage control
- accessories included: Spray gun, Adjustable lance, Turbo lance, 6 m PU high-pressure hose, Universal brush, Foam gun, Water filter

Technical data:
- rated voltage: 220-230 V
- rated frequency: 50 HZ
- power: 2000 W
- maximum pressure: 150 Bar Max
- working pressure: 110 Bar
- 468 L / H Max
- 6 m hose
- weight: 14.3 kg
- protection Class: II
- power cord length: 5 m

S055397903	-	1	pc

High-pressure cleaner HPC120A



Features:
- brush motor with copper winding
- aluminium suction-and-pressure pump
- total Stop system
- quick connect system
- thermal Protection
- accessories included: Spray gun, Extension Lance, Adjustable Lance, 5 m PVC High-pressure Hose, Foam gun, Water filter

Technical data:
- rated voltage: 220-230 V
- rated frequency: 50 HZ
- power: 1500 watts
- maximum pressure: 120 Bar Max
- working pressure: 80 Bar
- flow Max: 432 L / H Max
- 5 m hose: Weight: 6.2 kg
- protection Class: II
- power cord length: 5 m

S055397901	-	1	pc

High-pressure cleaner HPC170AI



Features:
- induction motor with copper winding
- aluminium suction-and-pressure pump
- total Stop system
- thermal Protection
- built-in detergent tank
- hose drum
- chemical dosage control
- accessories included: Spray gun with brass fittings, Turbo Lance, Adjustable Lance, High-pressure hose
- 8 m steel braided, Universal Brush, Adapter, Water filter

Technical data:
- rated voltage: 220-230 V
- rated frequency: 50 HZ
- power: 2500 watts
- maximum pressure: 170 Bar Max
- working pressure: 130 Bar
- 468 L / H Max
- 8 m hose
- weight: 24.5 kg
- protection Class: AND
- power cord length: 5M

S055397905	-	1	pc

3/4” water filter with quick coupling



Features:
- prevents solid particles from entering the device, helps to extend the service life of the device

Technical data:
- compatible with cleaner models: S-97901, S-97903, S-97905, S-98902

S053997930	-	1	pc

3/4 „water filter



Features:
- prevents solid particles from entering the device
- helps to extend the service life of the cleaner
- thanks to the large filtering surface it significantly improves the water flow

Technical data:
- compatible with cleaner models: S-97901, S-98902, S-97905, S-97903

S053997932	-	1	pc

Kit: spray gun, extension lance, adjustable lance



Features:
- this kit is designed for high pressure cleaners equipped with quick couplings for easy connection of the gun, lance and high pressure hose

Technical data:
- compatible with cleaner models: S-97901

S053997948	-	1	pc

Turbo lance



Features:
- cleans up to 40% faster than a standard nozzle
- powerful, rotating jet effectively removes dirt from solid, hard surfaces

Technical data:
- compatible with cleaner models: S-97901, S-97903

S053997938	-	1	pc

Adjustable lance



Features:
- easy jet control through the lance tip adjuster
- designed for cleaning various types of surfaces

Technical data:
- compatible with cleaner models: S-97901, S-97903
- if used with the S-98937 adapter, it is also suitable for: S-97905, S-98902

S053997940	-	1	pc

Turbo lance



Features:
- cleans up to 40% faster than a standard nozzle
- powerful, rotating jet effectively removes dirt from solid, hard surfaces

Technical data:
- compatible with cleaner models: S-97901, S-97903
- if used with the S-98937 adapter, it is also suitable for: S-97905, S-98902

S053997942	-	1	pc

Rotary turbo lance



Features:
- perfect for cleaning hard-to--reach places thanks to the tip adjustable at various angles. It will work well for washing, vehicle chassis, car wheel arches, etc.

Technical data:
- compatible with cleaner models: S-97901, S-97903
- if used with the S-98937 adapter, it is also suitable for: S-97905, S-98902

S053997944	-	1	pc

Extension lance



Features:
- an easy-to-install lance for connecting various types of equipment

Technical data:
- compatible with cleaner models: S-97901

S053997946	-	1	pc

Foam gun



Features:
- increased cleaning efficiency
- made of durable reinforced nylon PA66

Technical data:
- volume 0.35 l
- compatible with cleaner models: S-97901, S-97903

S053997920	-	1	pc

Universal brush



Features:
- perfect for cleaning patios, cars, boat decks, grills, windows and other surfaces

Technical data:
- compatible with cleaner models: S-97901, S-97903
- if used with the S-98937 adapter, it is suitable for: S-97905, S-98902

S053997922	-	1	pc

High-pressure cleaner gun



Features:
- a high-quality high-pressure gun with a threaded connection and trigger lock.

Technical data:
- compatible with cleaner models: S-97905

S053997929	-	1	pc

Rotary brush



Features:
- powered by water pressure for superior performance with minimum effort
- perfect for thorough cleaning of any surface
- allows convenient cleaning of hard-to-reach places

Technical data:
- compatible with cleaner models: S-97901, S-97903
- if used with the S-98937 adapter, it is also suitable for: S-97905, S-98902

S053997924	-	1	pc

High-pressure cleaner gun



Features:
- the spray gun is equipped with a trigger lock and quick couplings for easy connection of the gun and high-pressure hose

Technical data:
- compatible with cleaner models: S-97903

S053997950	-	1	pc

Wide brush



Features:
- excellent surface efficiency makes the brush ideal for cleaning larger surfaces
- the delicate bristles used in the brush protect the surface against scratching

Technical data:
- compatible with cleaner models: S-97901, S-97903
- if used with the S-98937 adapter, it is also suitable for: S-97905, S-98902

S053997926	-	1	pc

Patio rotary brush



Features:
- perfect for cleaning flat, vertical and horizontal surfaces
- durable, universal brush removes dirt and impurities
- equipped with a detergent tank for better cleaning performance and a convenient handle

Technical data:
- compatible with cleaner models: S-97901, S-97903
- if used with the S-98937 adapter, it is also suitable for: S-97905, S-98902

S053997928	-	1	pc

Sewer cleaning hose 15 m



Features:
- the high-pressure hose removes dirt, debris and hard congestions from gutters, drain pipes and sewers
- resistant to weather conditions and abrasion

Technical data:
- 15 m
- inner diameter 1/4”
- outer diameter 3/8”
- compatible with cleaner models: S-97901, S-97903
- if used with the S-98937 adapter, it is suitable for: S-97905, S-98902

S053997934	-	1	pc

Suction hose 5 metres



Features:
- easy suction - quick extraction of stored water from a barrel or water reservoir

Technical data:
- compatible with cleaner models: S-97901, S-97903, S-97905, S-98902

S053997936	-	1	pc

6 m PU high pressure hose



Features:
- resistant to oils, weather conditions and abrasion
- a robust, flexible structure resistant to kinks

Technical data:
- 6 m
- compatible with cleaner models: S-97903

S053997952	-	1	pc

5 m PVC high-pressure hose



Features:
- resistant to oils, weather conditions and abrasion
- quick and convenient assembly and disassembly from the device and the gun, saves time

Technical data:
- 5 m
- designed for the model of the washer: S-97901

S053997954	-	1	pc

High pressure hose steel braided 8 m



Features:
- high pressure hose with a robust, flexible structure resistant to kinks, adverse weather conditions and abrasions.

Technical data:
- 8 m
- compatible with cleaner models: S-97905

S053997956	-	1	pc

Equipment with combustion engine

Power generator



Features:
- portable single-phase generator recommended for single-phase receivers not fitted with sensitive electronic systems
- compact and ergonomic design
- thermal switch and oil level sensor
- high-quality generator providing stable voltage

Technical data:
- 1-phase
- power max. / rated 2.7 kW / 2.5 kW
- voltage 230 V
- 2 x 16 A 230 V Schuko socket
- fuel type Petrol
- capacity: 3.6 L tank
- rato R210 4-stroke engine
- weight: 37 kg

S-1027	-	1	pc

STALCO

STALCO PERFECT


S053997932


S053997936


S053997930


S055397901


S053997948


S053997920


S053997954


S053997938


S053997930


S055397903


S053997950


S053997940


S053997922


S053997942


S053997952


S053997920


S053997930


S055397905


S053998923


S053998925


S053997922


S053997929


S053997956


S053997930


S053998937


S055398902

S053998927


S053998931


S053997922


S053998935


S053998939


S053997930


S053998937


S053998929


S053997920


S053997938


S053998921


S053998937


S053998923


S053998925


S053998942


S053997926


S053997928


S053997924


S053997944


S053997940


S053997942


S053997934

S053998927


S053998933


S053998931


S053998935

STALCO
PERFECT



POWER TOOLS

Laser and electronic devices

Laser distance meter DLP100G



Features:
- measuring range: 100 m
- green laser beam
- continuous measurement
- area and volume measurement
- pythagoras function
- addition and subtraction of measurement results
- wall area measurement
- built-in battery
- USB Type-C charging
- minimum/maximum value
- LCD display

Technical data:
- measuring range: 0.05–100 m
- charging time: 90 min
- dimensions: 118 x 54 x 25.7 mm

S058298002	-	1/20/40	pc

Multifunction wall detector WDP100M



Features:
- red laser beam
- distance meter function
- detector function
- built-in battery
- USB Type-C charging
- 2.4” colour LCD display

Technical data:
- maximum detection depth:
- ferrous metals: 100 mm
- non-ferrous metals (copper): 80 mm
- copper conductors: 40 mm
- foreign objects (such as wooden studs): 20 mm / 38 mm
- size: 138.5 x 62 x 26.7 mm

S058198001	-	1/40	pc

Two-Way laser distance meter DLP200DG



Features:
- measuring range: 200 m bidirectional
- green laser beam
- continuous measurement
- area and volume measurement
- pythagoras function
- addition and subtraction of measurement results
- wall area measurement
- minimum/maximum value
- built-in battery
- USB Type-C charging
- colour LCD display with rotation function
- built-in magnet
- electronic level

Technical data:
- measuring range: 100 m (one-way), 200 m (two-way)
- charging time: 90 min
- dimensions: 118 x 54 x 25.5 mm

S058298004	-	1/40	pc

3D cross line laser LLP3DG



Features:
- display
- bluetooth and dedicated app
- remote control
- beam brightness adjustment
- robust protective case
- extended accessory set
- USB Type-C charging
- two batteries included

Technical data:
- laser beam: Green beam
- projection: 12 green laser lines
- reference working distance (60–100 LUX): ≥ 30 m
- reference working distance (with laser receiver): ≥ 50 m
- self-levelling/compensation range: 3.5° ± 1°
- levelling accuracy: ±2 mm / 10 m
- mounting thread: 1/4”, 5/8”

S058598010	-	1/4	pc

4D cross line laser LLP4DG



Features:
- advanced base with rotation function
- large display
- bluetooth and dedicated app
- remote control
- beam brightness adjustment
- robust protective case
- extended accessory set
- USB Type-C charging
- two batteries included

Technical data:
- laser beam: Green beam
- projection: 16 green laser lines
- reference working distance (60–100 LUX): ≥ 30 m
- reference working distance with laser receiver: ≥ 50 m
- self-levelling/compensation range: 4° ± 1°
- levelling accuracy: ± 2 mm / 10 m
- mounting thread: 1/4", 5/8"

S058598012	-	1/4	pc

Cross line laser mount LBP-MG



Features:
- positioning device for line lasers
- multifunction spring clip
- multi-directional bracket for precise adjustment
- multiple mounting options
- dedicated adapter for laser windows

Technical data:
- bracket with adapter:
- height adjustment scale: mm/ inches
- external thread for laser level: 1/4"
- Internal thread for tripod or laser pole: 1/4", 5/8"
- external thread length to bracket side: 3–9 cm
- load capacity: 3 kg
- dimensions: 23 x 18.7 x 7 cm
- adjustment:
- horizontal rotation 360°
- X-axis (horizontal adjustment left/right)
- Y-axis (horizontal adjustment forwards/backwards)
- steel plate size: 15 x 5 cm
- dimensions: 18.7 x 7 x 3.8 cm

S058898020	-	1/20	pc

Laser receiver LDP50



Features:
- dual LCD display
- built-in bubble level
- acoustic signal
- backlit screen

Technical data:
- working range: ≤ 50 m (typical), depending on light source
- level accuracy (high): ≤ 2 mm
- level accuracy (low): ≤ 3 mm
- laser receiving window width: 13 mm
- level vial accuracy: 30' / 2 mm
- power supply: 2 x AA alkaline batteries
- dimensions: 140 x 68 x 26 mm
- mounting size: 1/4"

S058598014	-	1/50	pc

Li-Ion battery 2.6 Ah 12.6 V



Technical data:
- type: Li-ion
- voltage: 11.1 V (max. 12.6 V)
- battery capacity: 2600 mAh
- designed for model: LLP4DG

S058898030	-	1/8	pc

1.8 m tripod TRP-18



Features:
- 3-section height adjustment
- quick-release
- ergonomic handle
- non-slip feet
- built-in bubble level

Technical data:
- mounting thread size: 1/4", 5/8"
- leg sections: 3 sections
- leg lock type: clamp
- head type: ball head
- pan range: 360°
- tilt range: 180°
- side tilt: 90°
- folded length: 68 cm / 26.7"
- min. height: 65 cm / 25.6"
- max. height: 180 cm / 70.8"

S058898022	-	1/12	pc

3.4 m telescopic pole with tripod TPP-34



Features:
- fully adjustable telescopic pole
- multifunction fine-adjustment bracket
- high stability with spring-loaded base
- stable tripod base with built-in bubble level
- easy assembly and transport

Technical data:
- pole sections: 4 telescopic poles + 1 tail pole
- scale: cm/inches
- pole wall thickness: 10 mm
- thread size of poles: 5/8"
- pole section height: 60 cm / 23.62"
- telescopic pole height: 0–53 cm / 0–20.87"
- maximum height: 3.4 m
- tripod height: 48–84 cm / 18.90–33.07"
- bracket mounting size: 1/4", 5/8"
- external thread length to bracket side: 11.5–6.5 cm / 4.53–2.56"
- fine height adjustment range: 7 cm / 2.76"
- material: aluminium with polyurethane coating
- storage length: 80 cm / 31.5"
- weight: 3.02 kg

S058898024	-	1/4	pc

2.4 m levelling staff LRP-24



Features:
- precision scale
- built-in bubble level
- sliding clamp for laser receiver
- telescopic construction
- weather-resistant

Technical data:
- accuracy: ±0.5 mm / 10 cm
- ± 1 mm / 1 m
- ± 3 mm / 2.4 m
- locking method: clamp key
- storage length: 1.35 m / 53.1"
- maximum height extended: 2.4 m / 94.5"
- level: Yes
- size: 1.31 x 0.03 x 0.09 m

S058898026	-	1/10	pc

Cordless equipment

GTP60-40BL cordless trimmer



Features:
- brushless motor
- 2 speed levels
- variable speed
- d-type handle
- split shaft
- control panel
- low weight
- accessories: 1 x S5 hex key, 1 x single shoulder strap

Technical data:
- rated voltage: 60 V max.
- cutting width: 14" /16" (35 cm / 40 cm)
- battery type: lithium-ion
- motor: brushless
- rated power: 900 W
- no-load speed: 2 levels 5500/6500 min^{-1}
- line diameter: 2.0 mm / 0.08"
- variable speed
- double line with impulse powered
- split shaft: Yes
- handle type: D-shaped handle
- ergonomic design and lightweight

S052398802	-	1	pc

BCP60-42BL cordless scythe



Features:
- brushless
- cutting width 42 cm
- ergonomic bicycle handle
- anti-vibration handle system
- digital display
- 3 speeds
- accessories: 1 x 3-tooth blade, 1 x head, 1 x T20 Torx wrench, 1 x socket wrench, 1 x shoulder strap

Technical data:
- rated voltage: 60 V max.
- cutting width of nylon head: 42 cm / 16.5"
- battery type: lithium-ion
- motor: brushless
- rated power: 1800 W
- no-load speed: 3 levels, 4500/5200/5800 min^{-1}
- line diameter: 2.4 mm / 0.095 inch
- 3-tooth blade: 25.4 cm / 10”
- weight: 5 kg

S052398806	-	1	pc

BCP60-42BLCS cordless scythe



Features:
- brushless
- cutting width 42 cm
- ergonomic bicycle handle
- anti-vibration handle system
- digital display
- 3 speeds
- accessories: 1 x 3-tooth blade, 1 x head, 1 x T20 Torx wrench, 1 x socket wrench, 1 x shoulder strap

Technical data:
- rated voltage: 60 V max.
- cutting width of nylon head: 42 cm / 16.5"
- battery type: lithium-ion
- motor: brushless
- rated power: 1800 W
- no-load speed: 3 levels, 4500/5200/5800 min^{-1}
- line diameter: 2.4 mm / 0.095 inch
- 3-tooth blade: 25.4 cm / 10”
- weight: 5 kg

S052398804	-	1	pc

Head for trimmer



- for the GTP60-40BL trimmer „Tap&Go” system

S053998100	m : Ø 2.0 mm	1	pc

Scythe blade



- for scythe brushcutters BCP60-42BLC, BCP60-42BL

S053998104	Ø 258 cm	1	pc

Brush cutter head



- for BCP60-42BLCS, BCP60-42BL scythe
- „Tap&Go” system

S053998102	4 m : Ø 2.4 mm	1	pc

Brushcutter harness



- for BCP60-42BLCS, BCP60-42BL scythe

S053998140	-	1	pc

HTP60-60 cordless hedge trimmer



Features:
- cutting length: 52 cm
- cutting capacity: ø 27 mm
- laser-cut blades
- high torque
- planetary gear
- hand guard
- less noise and vibration
- hook function
- accessories: 1 x blade guard

Technical data:
- rated voltage: 60 V max.
- blade length : 60 cm (24")
- battery type: lithium-ion
- rated power: 600 W
- cutting length: 52 cm
- cutting capacity: 27 mm
- strokes per minute: 3200 SPM
- ergonomic design and lightweight
- planetary gear for high torque and cutting force

S052398810	-	1	pc

BLP60-300BL cordless leaf blower



Features:
- brushless motor
- air speed: 306 km/h
- air flow: 137⁴ m³/h
- 3 speeds
- variable speed
- turbo mode
- control panel
- lightweight

Technical data:
- rated voltage: 60 V max.
- air speed: 306 km/h (190 MPH)
- battery type: lithium-ion
- motor: brushless
- rated power: 1600 W
- motor speed: 26500 min^{-1}
- air flow: 1374 m³/h (810CFM)
- variable speed
- increased blower force tp 28N
- 3 speed modes + Turbo speed

S052398816	-	1	pc

HTP60-66BLCS cordless hedge trimmer



Features:
- cutting length: 64 cm
- cutting capacity: ø 30 mm
- laser-cut blades
- hand cover
- multi-position handle
- soft handle
- double trigger system
- digital display
- tip cover
- 3 speeds
- accessories: 1 x blade cover

Technical data:
- rated voltage: 60 V max.
- blade length: 660 mm / 26”
- battery type: lithium-ion
- motor: brushless
- rated power: 1200 W
- no-load speed: 3 levels 3200/3600/4000 min^{-1}
- blade opening: 38 mm / 1.5”
- cutting capacity: 30 mm /1.18”
- blade thickness: 2.5 mm / 0.098”
- weight: 4 kg
- cutting length: 640 mm

S052398812	-	1	pc

BLP60-320BLCS cordless leaf blower



Features:
- brushless
- air speed: 339 km/h
- air flow: 140⁰ m³/h
- speed control
- turbo mode
- cruise control
- digital display
- lightweight

Technical data:
- rated voltage: 60 V max.
- air speed: 339 km/h (94 m/s)
- battery type: lithium-ion
- motor: brushless
- rated power: 1880 W
- no-load speed: 29000 min^{-1} air flow: 1400 m³/h 830CFM
- weight: 2.8 kg
- variable speed
- max. Blowing force: 29.1N
- cruise control: YES
- turbo boost mode + multiplier control display
- variable speed: stepless

S052398818	-	1	pc

CSP60-40BL cordless chainsaw



Features:
- brushless
- oiler
- tool-free chain tensioning
- electronic + mechanical brake
- accessories: 1 x blade cover

Technical data:
- rated voltage: 60 V max.
- chain and bar length OREGON: 16" (406mm)
- battery type: lithium-ion
- engine: brushless
- rated power: 1800 W
- motor speed without load: 10000 min^{-1}
- chain speed without load: 19 m/s
- chain pitch: 3/8'' /9.525 mm
- oil tank capacity: 260 ml
- automatic oiler
- tool-free chain tensioning: Yes
- electronic chain brake

S052398822	-	1	pc

Battery-powered lawn mower LMP60-51BLSP



Features:
- brushless
- cutting size 51 cm
- 6-stage cutting height
- mulching
- single-point height adjustment
- drive
- easy storage
- 60 L grass basket
- accessories: 1 x ejector cover, 1 x mulching block, 1 x grass basket

Technical data:
- rated voltage : 60 V max
- cutting width: 510 mm / 19"
- battery type: lithium-ion
- engine: brushless
- rated power: 1500 W
- blade speed: 2900-3300 min^{-1}
- cutting height: 25-80 mm
- front wheels: 8" (203 mm)
- rear wheels : 10" (254 mm)
- grass basket: 60 L
- collection, mulching, side discharge, rear discharge
- deck: steel

S052398830	-	1	pc

Chainsaw guide



- for the CSP60-40BL saw

S053998135	400 mm (16")	1	pc

Lawn mower blade



- for mowers: LMP60-51BLSP, LMS40-51BLSP

S053998113	51 cm	1	pc

Chain for a chainsaw



- for the CSP60-40BL saw

S053998125	16" / 406 mm : 56 cells : pitch: 8.25 mm (3/8") : spacing: 1.1 mm (0.043")	1	pc

60 V BLP60 battery



Features:
- battery level indicator
- cooling system
- overheating protection
- overcharging protection
- overdischarging protection
- overcurrent protection
- intelligent voltage balance management

S052698882	2.5 Ah cells: 18650 : standard 2.5 A charger: 75 min : fast charger 5.5 A: 40 min : weight: 1.27 kg	1	pc
S052698884	4 Ah : cells: 21700 : standard 2.5 A charger: 115 min : fast charger 5.5 A: 55 min : weight: 1.6 kg	1	pc
S052698886	8 Ah : cells: 21700 : standard 2.5 A charger: 240 min : fast charger 5.5 A: 110 min : weight: 2.7 kg	1	pc

BAP60 battery adapter



Features:
- the adapter allows you to connect the XTR series backpack battery to 60V devices using a standard slide-in battery.

S053998877	-	1	pc

Harness with BHP60-CS battery adapter



Features:
- the adapter allows you to connect standard 60V slide-in batteries to XTR line devices
- breathable and ergonomic harness

S053998875	-	1	pc

BCP60-5.5A charger



Features:
- active cooling system
- information about the system LED
- fast charging

Technical data:
- output voltage: 60 V max.
- max. output current: 5.5 A
- rated power: 355 W
- cable length: 1.2 m

S052698892	-	1	pc

BCP60-2.5A charger



Features:
- information about the LED system

Technical data:
- output voltage: 60 V max.
- max. output current: 2.5 A
- rated power: 155 W
- cable length: 1.2 m

S052698894	-	1	pc

BBP60-15AHCS backpack battery



Features:
- 21700 battery cells
- battery charge level indicator
- cooling system
- overheating protection
- protection against excessive charging
- protection against excessive discharge
- overcurrent protection
- intelligent voltage balance management
- foldable handle
- reflective tape IP54

Technical data:
- lithium-ion 60 V max.
- battery capacity : 15 Ah / 810 Wh
- battery cells: 21700
- protection level: IP54
- charging cycles: 1500
- charging time - Standard mode 4 A: 235 min
- charging time - Turbo mode 8 A: 110 min
- weight: 6.4 kg
- cable length: 1.6 m

S052698888	-	1	pc

Harness



- to: BFP60

S053998874	-	1	pc

BFP60 backpack battery rack



Features:
- 70% of the weight of the battery rests on the hips and 30% on the shoulders, which puts less strain on the shoulders and causes less fatigue.
- designed for professionals.
- the frame will follow the user's movements to avoid more pressure on the arms while working.

Technical data:
- accessory for connecting the backpack battery and the device

S053998873	-	1	pc

60 V 8 A BCP60-8ACS charger



Features:
- active cooling system
- system information LED
- turbo charging mode
- fast charging

Technical data:
- output voltage: 60 V max.
- max. output current: 8 A
- rated power: 550 W
- cable length: 1.6 m
- weight: 1.2 kg

S052698896	-	1	pc

RMP300 mowing robot robotic lawn mower



Features:
- quiet operation
- rain sensor
- automatic return to base
- cutting height adjustment
- pin code protection
- fast charging
- advanced sensors ensuring safety and efficiency of work
- accessories: charging station, pins for mounting the charging station 8 pcs., power supply, 100m boundary cable, mounting pins border wire 130 pcs., set of cutting blades 3+6 pcs. including mounting screws, spacer strip for determining distances

Technical data:
- mowing area: up to 300 m³
- rated voltage: 20 V
- battery type: Li-Ion
- battery capacity: 2 Ah
- charging time: 200 min
- disk rotation speed without load: 3000 rpm min
- cutting diameter: 160 mm
- cutting height: 20-50 mm
- cutting height positions: 7
- maximum terrain slope: 15 degrees / 27%
- narrowest possible passage: 0.8 m
- mowing method: Mulching
- configuration method: Keyboard
- weight: 5.5 kg
- noise: <61 dB
- mower protection rating: IPX5
- charging station protection rating: IPX4
- power supply protection rating: IP67

S052398699	-	1	pc

Mowing robot RMP650



Features:
- quiet operation
- rain sensor
- control function from the app: Wi-Fi 2.4G, Bluetooth 4.0
- automatic return to base
- cutting height adjustment
- four mowing zones
- pin code security
- advanced sensors for safety and efficiency.

Technical data:
- mowing area: up to 600 m²
- rated voltage: 20 V
- battery type: Li-Ion
- battery capacity: 2.5 Ah
- disc speed at no load: 2800 rpm
- mowing diameter: 180 mm
- cutting height: 20-60 mm
- cutting height positions: 5
- maximum slope: 20 degrees / 36%
- narrowest possible passage: 0.8 m
- mowing method: Mulching
- communication: Wi-Fi 2.4g+ Bluetooth 4.0
- app: Yes
- configuration method: Keyboard/ Application
- number of Schedules: 1
- charging time: 120 min
- weight: 8 kg
- noise: <55 dB
- degree of protection of mower: IPX5
- degree of protection of the charging station: IPX4
- degree of protection of the power supply: IP67

S052398700	-	1/1	pc

Mowing robot RMP950



Features:
- quiet operation
- rain sensor
- control function from the app: Wi-Fi 2.4G, Bluetooth 4.0
- automatic return to base
- cutting height adjustment
- four mowing zones
- pin code security
- advanced sensors for safety and efficiency
- two work schedules
- fast charging

Technical data:
- mowing area: up to 900 m²
- rated voltage: 20 V
- battery type: Li-Ion
- battery capacity: 5 Ah
- disc speed at no load: 2800 rpm
- mowing diameter: 180 mm
- cutting height: 20-60 mm
- cutting height positions: 5
- maximum slope: 20 degrees / 36%
- narrowest possible passage: 0.8 m
- mowing method: Mulching
- communication: Wi-Fi 2.4g+ Bluetooth 4.0
- app: Yes
- configuration method: Keyboard/ Application
- number of schedules: 2
- charging time: 90 min
- weight: 8.2 kg
- noise: <55 dB
- degree of protection of mower: IPX5
- degree of protection of the charging station: IPX4
- degree of protection of the power supply: IP67

S052398702	-	1/1	pc

RMP2000US mowing robot robotic lawn mower



Features:
- quiet operation
- rain sensor
- control function via application Wi-Fi 2.4G + Bluetooth 4.0
- automatic return to base
- adjustable cutting height
- possibility to set four starting points
- pin code protection
- advanced sensors ensuring safety and efficiency of work
- two work schedules
- quick charging
- mapping mowing area
- ultrasonic sensors
- LED lighting
- super Wi-Fi
- accessories: charging station, pins for mounting the charging station 6 pcs., power supply, boundary wire 250 m, pins for mounting the boundary wire 320 pcs., set of cutting blades 3+6 pcs. including mounting screws, spacer strip for determining the distance

Technical data:
- mowing area: up to 2000 m²
- rated voltage: 20 V
- battery type: Li-Ion
- battery capacity: 5 Ah
- disk rotation speed without load: 2300 rpm
- cutting diameter: 220 mm
- cutting height: 20-60 mm
- cutting height positions: 9
- maximum terrain slope: 20 degrees / 36%
- narrowest possible passage: 0.8 m
- mowing method: Mulching
- communication: Wi-Fi 2.4G + Bluetooth 4.0
- ultrasonic sensors
- method configuration: Keyboard/ Application
- number of schedules: 2 + automatic schedule
- charging time: 90 min
- Weight: 10.6 kg
- noise: <52 dB
- mower protection level: IPX5
- charging station protection level: IPX4
- power supply protection level: IP67

S052398706	-	1	pc

RMP1300US mowing robot robotic lawn mower



Features:
- quiet operation
- rain sensor
- control function via application Wi-Fi 2.4G + Bluetooth 4.0
- automatic return to base
- adjustment of cutting height
- possibility to set four starting points
- pin code protection
- advanced sensors ensuring safety and efficiency of work
- two work schedules
- quick charging
- mapping the mowing area
- ultrasonic sensors
- LED lighting
- super WiFi - in the charging station
- accessories: 1 x charging station, 1 x pins for mounting the charging station 6 pcs, 1 x power supply, 1 x boundary wire 200 m, 1 x pins for mounting the boundary wire 250 pcs, 1 x set of cutting blades 3 + 6 pcs. including mounting screws, 1 x spacer strip for determining distances

Technical data:
- mowing area: up to 1300 m²
- rated voltage: 20 V
- battery type: Li-Ion Battery capacity: 5 Ah
- disk rotation speed without load: 2300 rpm
- cutting diameter : 220 mm
- cutting height: 20-60 mm
- cutting height positions: 9
- maximum terrain slope: 20 degrees / 36%
- narrowest possible passage: 0.8 m
- mowing method: Mulching
- communication: Wi-Fi 2.4G + Bluetooth 4.0
- application: Yes
- ultrasonic sensors
- configuration method: Keyboard/App
- number of schedules: 2 + automatic schedule
- charging time: 90 min
- weight: 10.6 kg
- noise: <52 dB
- mower protection level: IPX5
- charging station protection level: IPX4
- power supply protection level: IP67

S052398704	-	1	pc

RMP800 smartvision robotic lawn mower



Features:
- VSLAM – real-time visual mapping and localization
- 3D view with stereoscopic camera
- separate zone management
- work schedule: 1 schedule + Auto schedule
- digital display
- rain sensor
- control via Wi-Fi 2.4G + Bluetooth 4.0 app
- automatic return to base
- cutting height adjustment
- PIN code protection
- advanced sensors for safe and efficient operation
- tilt/lift/rollover sensor
- impact sensor
- safety brake

Technical data:
- mowing area: up to 800 m²
- rated voltage: 20 V
- battery type: Li-ion
- battery capacity: 5 Ah
- no-load speed: 28^{00} min^{-1}
- cutting width: 180 mm
- cutting height: 20–60 mm (9 levels)
- max. slope: 22° / 42%
- weight: 8 kg
- sound power level: 55 dB(A)
- protection rating: IPX5
- dimensions: 605 x 370 x 235 mm

S052398708	-	1	pc

Magnetic marker set



- Set includes:
- 2 x magnetic marker
- 4 x mounting pegs
- designed for robotic mower RMP800 SmartVision

S053998732	-	1/10	pc

Boundary wire connector



Features:
- used to repair or extend the boundary wire of the mowing robot

S053998729	-	1	pc

Magnetic strip set



- Set includes:
- 10 m magnetic strip
- 20 x mounting pegs
- 4 x magnetic strip connectors
- designed for robotic mower RMP800 SmartVision

S053998733	-	1/5	pc

Set of blades for mowing robot



Features:
- 9 replacement blades for robotic mower S-98700, S-98702

S053998723	-	1	set

Boundary wire



Technical data:
- boundary wire: 100 m

S053998719	-	1/20	pc
S053998721	-	1/20	pc
S053998727	-	1/20	pc

Charging station canopy



Features:
- charging station canopy for mowing robots RMP650, RMP950

S053998720	-	1	pc
S053998725	-	1	pc

Boundary wire pins



- 100 pins for the boundary wire

S053998722	-	1/20	set

GPS module for robotic lawn mower RMP1300US, RMP2000US



- for Robotic Lawn Mower RMP1300US, RMP2000US

S053998731	-	1/20	pc

Rechargeable LED headlamp HLP650MS



Features:
- 6 lighting modes
- motion sensor
- max. beam distance 80 m
- USB-C charging port
- two power options: 3.7 V battery or 3 x AAA batteries

Technical data:
- light source: 2 x CREE LED
- power: 6 W spot light, 6 W floodlight
- max. beam distance: 80 m
- luminous flux:
- 130 lm – medium focused light
- 350 lm – high focused light
- 650 lm – high focused light and floodlight
- 350 lm – high floodlight
- 20 lm – low floodlight
- 280 lm – SOS mode
- runtime:
- 4.5 h – medium focused light
- 3 h – high focused light
- 1.5 h – high focused + floodlight
- 2.7 h – high floodlight
- 22.5 h – low floodlight
- power supply: 3.7 V / 1250 mAh battery
- protection class: IPX8
- charging time: 3.4 h
- colour temperature: 6500 K

S052498799	-	1/10/40	pc

Rechargeable LED flashlight SLP800



Features:
- 7 lighting modes
- max. beam distance 530 m
- floodlight function
- red light function
- red light strobe function
- tripod mounting thread
- power bank function
- fluorescent ring
- USB-C charging port

Technical data:
- max. beam distance: 530 m
- luminous flux:
- mode 1: 160 lm, 400 lm, 800 lm
- mode 2: 200 lm, 500 lm
  red light flood mode
  red light strobe mode
- runtime:
- mode 1:
- 6.5 h - 31 h
- power supply: 3.7 V / 8000 mAh battery
- USB output: 5 V / 2 A
- protection class: IPX6
- charging time: 4.5 h
- colour temperature: 6500 K

S052498797	-	1/16	pc

Rechargeable LED headlamp HLP700MS



Features:
- motion sensor
- 5 operating modes
- max. beam distance 50 m
- adjustable spot light
- built-in battery
- USB-C charging port

Technical data:
- light source:
- floodlight – COB LED
- spotlight – SMD LED
- max. beam distance: 50 m
- luminous flux:
- approx. 150 lm – low diffused light
- approx. 500 lm – high diffused light
- approx. 200 lm – spot light
- approx. 200 lm – low full light
- approx. 700 lm – high full light
- runtime:
- approx. 8 h – low diffused light
- approx. 3.5 h – high diffused light
- approx. 8 h – spot light
- approx. 6 h – low full light
- approx. 2 h – high full light
- colour temperature: 6000 K
- protection class: IP54
- power supply: 3.7 V / 2600 mAh Li-ion battery
- charging time: approx. 4 h

S052498800	-	1/32	pc

Rechargeable battery for work lamps LED H-OSL10



Features:
- movable head with light diffuser
- COB LED technology
- 10W power provides up to 1000 lumens with adjustable light intensity
- additional handle
- strong built-in magnet

Technical data:
- reflector (number of lumens): 1000-100
- angle of incidence of light: 120°
- spotlight (Lumen): 150
- correlated CCT colour temperature: 5600 - 6500k
- operating time: 2-10 h
- recharge Time: 4 h
- IP degree of protection: IP 65
- IK mechanical strength class: IK 07
- input power: 10 COB/2 SMD
- battery capacity: 3200 mAh, Li-ion
- power cable: USB - Type C, 1 m
- charger: 5 V / 1 A
- dimensions: 362 x 53 x 65 mm
- weight: 265 g

S052498801	-	1	pc

Rechargeable battery for work lamps LED H-D10



Features:
- movable head with light diffuser
- COB LED technology
- 10W power provides up to 1000 lumens with adjustable light intensity
- additional handle
- strong built-in magnet

Technical data:
- luminous flux (Lumen): 1000-100
- angle of incidence of light: 90°
- diffused light (number of lumens): 800-80
- angle of incidence of light: 360°
- correlated CCT colour temperature: 5600 - 6500 k
- operating time: 2-10 h
- recharge Time: 4 h
- IP degree of protection: IP 65
- IK mechanical strength class: IK 07
- input power: 10 W COB
- battery capacity: 3200 mAh, Li-ion
- power cable: USB - Type C, 1 m
- charger: 5 V / 1 A
- dimensions: 247 x 68 x 96 mm
- weight: 460 g

S052498803	-	1	pc

Workshop lamp battery LED H-D45



Features:
- tube design for 180° beam
- head on a flexible boom
- technology 42 x SMD LED
- 5 W provides up to 450 lumens of luminous flux
- additional handle
- strong built-in magnet

Technical data:
- reflector (number of lumens): 450
- spotlight (Lumen): 100
- correlated CCT colour temperature: 6000 k
- operating time (headlights): 3.5 h
- operating time (spot light): 9 h
- recharge Time: 3.5 h
- IP degree of protection: IP 65
- IK mechanical strength class: IK 07
- input power: 5 W 42 x SMD/2 W SMD
- battery capacity: 2600 mAh, Li-ion
- power cable: Micro USB, 1.2 m
- charger: 5 V / 1 A
- dimensions: Ø 54 x 446 mm
- weight: 350 g

S052498807	-	1	pc

Rechargeable battery for work lamps LED H-FB5



Features:
- head on a flexible boom
- COB LED technology
- 5 W power provides up to 500 lumens with adjustable light intensity
- additional handle
- strong built-in magnet

Technical data:
- reflector (number of lumens): 500-50
- light angle: 120°.
- spotlight (Lumen): 150
- correlated CCT colour temperature: 5600 - 6500k
- operating time: 3.5-18 h
- recharge Time: 3.5 h
- IP degree of protection: IP 65
- IK mechanical strength class: IK 07
- input power: 5 COB/2 SMD
- battery capacity: 3200 mAh, Li-ion
- power cable: USB - Type C, 1 m
- charger: 5 V / 1 A
- dimensions: 479 x 60 x 43 mm
- weight: 265 g

S052498805	-	1	pc

Refletor mini battery LED H-CFL10



Features:
- LED technology
- the 10 watt output provides up to 1000 lumens with a 100% / 50% adjustable range.
- practical on/off button
- battery charge indicator
- additional handle
- strong built-in magnet

Technical data:
- luminous flux (Lumen): 1000/500
- light angle (main source): 120°
- correlated colour temperature: CCT 6000 K
- operating time: 3 h / 6 h
- recharge Time: 3,5 / 5 h
- IP degree of protection: Waterproof to IP 68
- IK mechanical strength class: IK 09
- input power: 10 Watts
- battery capacity: 4400 mAh 3.7 V
- power cable: USB Type-C, 1 m
- charger: 5 V / 1 A
- dimensions: 145 x 100 x 45 mm
- weight: 385 g

S052498809	-	1	pc

Refletor battery LED LUM-X C-FL40W



Features:
- COB LED technology
- 40 W power provides up to 4000 lumens with continuously variable light intensity function
- practical on/off button
- battery charge indicator
- additional handle

Technical data:
- luminous flux (Lumen): 4000 / 400
- luminous flux (Lumen) with diffuser: 3200 / 320
- angle of incidence of light: 120°
- angle of light with diffuser: 360°
- correlated CCT colour temperature: 6000 K
- operating time: 2 h - 15 h
- recharge Time: 4.5 h
- IP degree of protection: IP 65
- IK mechanical strength class: IK 07
- input power: 40 Watts
- battery capacity: 5200 mAh, 11.1 V
- AC Input: - USB
- output: 5 V / 1 A
- power cable: 5 m 2*1.0 H05RN
- dimensions: 280 x 219 x 87 mm
- weight: 2.71 kg

S052498811	-	1	pc

Refletor battery LED LUM-X C-CFL60W



Features:
- impact resistance
- COB LED technology
- 60 W power provides up to 4000 lumens with adjustable light intensity
- practical on/off button
- battery charge indicator
- additional handle

Technical data:
- luminous flux (Lumen): 6000 / 600
- luminous flux (Lumen) with diffuser: 4800 / 480
- angle of incidence of light: 120°
- angle of light with diffuser: 360°
- correlated CCT colour temperature: 6000 K
- IP degree of protection: IP 54 mechanical strength class IK: IK 07
- input power: 60 Watts
- AC Input: AC 100-240 V, 50-60 HZ AC
- output: AC socket 250 V 13 A *2
- power cable: 5 m 3*1.5 H07RN
- dimensions: 306 x 265 x 102 mm
- weight: 3.2 kg

S055898815	-	1	pc

Refletor battery LED LUM-X C-FL40W BT



Features:
- impact resistance
- COB LED technology
- 40 W power provides up to 4000 lumens with adjustable light intensity
- bluetooth function
- two speakers with power of 2 x 5 W
- practical on/off button
- battery charge indicator
- additional handle

Technical data:
- luminous flux (Lumen): 4000 / 400
- luminous flux (Lumen) with diffuser: 3200 / 320
- angle of incidence of light: 120°
- angle of light with diffuser: 360°
- correlated CCT colour temperature: 6000 K
- operating time: 2 h - 15 h
- recharge Time: 4.5 h Speakers: 2 x 5 W
- IP degree of protection: IP 65 mechanical strength class IK:IK 07
- input power: 40 Watts
- battery capacity: 5200 mAh, 11.1 V
- AC Input: - USB
- output: 5 V / 1 A
- power cable: 5 m 2*1.0 H05RN
- dimensions: 280 x 219 x 87 mm
- weight: 2.71 kg

S052498813	-	1	pc

Telescopic tripod C-TR18 / C-TR30



Features:
- made of powder-coated steel sheet
- for indoor and outdoor use
- rigid tripod construction ensures stability

S053998817	1,10 - 1.80 m ; max. 40 kg	1	pc
S053998819	1,15 - 3,0 m ; max. 30 kg	1	pc

Magnetic lamp holder C-MH



Features:
- strong magnetic holder designed for mounting and positioning large worklights on any magnetic surface
- rapid installation of the lamp in any position

S053998825	-	1	pc

Double tripod support, cpl. 4 screws m8



Features:
- made of powder-coated steel sheet
- for indoor and outdoor use

Technical data:
- maximum load up to 40 kg

S053998821	-	1	pc

Diffuser for spotlight series LUM-X LD-360



Features:
- distributes and softens light

S053998823	-	1	pc

VWP100 window washer



Features:
- accessories: 1 x spray bottle, 1 x microfiber cloth, 1 x USB-C cable

Technical data:
- rated voltage: 5 V max.
- suction nozzle width: 280 mm
- rated power: 18 W
- air flow: >0· 4 m³/min
- noise: <70 dB(A)
- tank capacity: 100 ml
- battery: lithium-ion 2000 mAh
- working time: 25 min
- charging time: 3 h

S051998892	-	1	pc

150 mm suction head for window vacuum



- for window vacuum VWP100

S053998904	-	1/50	pc

280 mm suction head for window vacuum



- for window vacuum VWP100

S053998902	-	1/30	pc

Extension pole for window vacuum



- for window vacuum VWP100

S053998908	-	1/25	pc

Microfibre cloths, 2 pcs



- for window vacuum VWP100

S053998906	-	1/216	pc

Powered tools

SDS plus RH26 rotary impact hammer



Features:
- 3 Operating modes plus chisel adjuster with 8 positions.
- switch with interlock function in „ON" mode
- smooth speed control
- efficient cooling system
- safety clutch protects
- anti-dust motor cover
- the swivel cord cover
- accessories included: 1 x SDS plus 8 x150 mm drill bit, 1 x SDS plus 10 x 150 mm drill bit, 1 x SDS plus 12 x 150 mm drill bit, 250 mm SDS plus pointed chisel, 14 x 250 flat chisel, extra handle, Drilling depth stop, Chuck grease, Wiping cloth

Technical data:
- type of chuck SDS plus
- rated Input Power 720 W
- speed at no load 0-1300 r/min
- impact Rate 0–4500 BPM
- impact energy 3.0 J
- maks. drilling diameter:
- concrete 26 mm
- steel 13 mm
- wood 30 mm
- weight (without accessories) approx. 2.7 kg
- protection Class II
- power cord length: 4M
- noise level: 102 db

S054298500	-	1	pc

SDS max RH40VS rotary impact hammer



Features:
- 2 Operating modes plus chisel adjustor with 12 positions.
- switch with interlock function in „ON" mode
- anti-vibration technology
- the ECS electronic speed stabilization system
- the "Soft Start" system
- speed control
- a safety clutch
- the power indicator shows the power cord is broken or the supply voltage is lost
- service reminder light signals
- the gear housing made of magnesium alloy
- a 4-metre-long power cordAccessories included: 1 x SDS max 16 x 320 drill bit, 1 x SDS max 22 x 320 mm drill bit, SDS max 350 mm pointed chisel, SDS max 25 x 350 mm flat chisel, extra handle, drilling depth limiter, Chuck grease, Wiping cloth

Technical data:
- type of chuck SDS max
- rated voltage 230-240 V ~
- rated frequency 50 Hz
- rated input power 1350 W.
- rated speed without load 150-516 r / min
- impact rate 3120 BPM
- impact energy 13 J
- maks. drilling diameter:
- concrete 40 mm
- weight (without accessories) approx. 7.1 kg
- protection Class II
- power cord length: 4M
- noise level: 110 dB

S054298510	-	1	pc

Demolition hammer hex 30mm DHHP48J



Features:
- lock switch „ON"
- anti-vibration technology
- the ECS electronic speed stabilization system
- the gear housing made of magnesium alloy
- high impact energy and robust design
- the additional grease chamber
- the power indicator shows the power cord is broken or the supply voltage is lost
- service reminder light signals
- accessories included: 1 x Pointed Chisel 410 mm Hex 30 mm, 1 x Flat Chisel 30 x 410 mm Hex 30 mm, Extra handle, Chuck grease, Wiping cloth

Technical data:
- type of chuck HEX 30 mm
- rated voltage 220-240 V ~
- rated frequency 50 Hz
- rated input power 1750 W
- impact rate 1700 BPM
- impact energy 48 J
- weight (without accessories) 15 kg
- protection Class I
- Power cord length: 4M
- noise Level 105 db

S054298524	-	1	pc

Angle grinder AG125QVS



Features:
- the “anti-restart” system
- the “Soft Start” system
- the ECS electronic speed stabilization system
- a quick-release blade guard
- special design ventilation inlets and anti-dust protection of the rotor and stator
- speed control allows
- a 4-metre-long power cord
- accessories included: extra handle, protective cover, external flange key, internal flange, external flange, 1 x set of carbon brushes

Technical data:
- rated voltage: 230 V
- rated frequency: 50 HZ
- power: 1400 W
- rotation speed: 3000-10500 rpm
- disc Diameter: 125 mm
- thread Type: M14
- protection Class: II
- power cord length: 4 m
- weight: 2.6 Kg

S054398202	-	1	pc

Circular saw for steel cutting 2200 W SSP355



Features:
- shield
- spindle lock
- lockable switch
- transport lock
- vice with cutting angle

Technical data:
- 220-240 V / 50 Hz
- nominal input power: 2200 W
- speed at no load: 1500 r/min
- blade diameter: Ø 355 mm
- blade mounting diameter 25.4 mm
- power cord length: 2 m

S054598632	-	1	pc

Angle grinder AG230Q



Features:
- the “anti-restart” system
- the “Soft Start” system
- a quick-release blade guard
- special design ventilation inlets and anti-dust protection of the rotor and stator
- a 4-metre-long power cord
- accessories included: extra handle, protective cover, external flange key, internal flange, external flange, 1 x set of carbon brushes

Technical data:
- rated voltage: 230 V
- rated frequency: 50 HZ
- power: 3000 W
- rotation speed: 6500 rpm
- dial Diameter: 230 mm
- thread Type: M14
- protection Class: II
- power cord length: 4M
- weight: 6.6 kg

S054398210	-	1	pc

HM14VS mixer



Features:
- 2-gears
- switch with lock function in „ON” mode
- the “anti-restart” system prevents restart in case of power failure
- the „Soft Start” system limits the inrush current, in order to avoid sudden current surges and jerking on start-up
- the ECS electronic speed stabilization system maintains the rotational speed at heavy loads
- speed control performed with a potentiometer
- accessories included: Stirrer Ø 120 x 600, 2 x flat spanner for mounting the stirrer

Technical data:
- rated voltage: 230
- rated frequency: 50HZ
- power: 1400 W
- rotation speed: 1 gear 150-300 / 2 gear 300-650 RPM
- thread Type: M14
- protection Class: II
- power cord length: 4M
- weight: 5.3 kg

S055198540	-	1	pc

HM19VS mixer



Features:
- 2-gears
- switch with lock function in „ON" mode
- the "anti-restart" system prevents restart in case of power failure
- the „Soft Start" system limits the inrush current, in order to avoid sudden current surges and jerking on start-up
- the ECS electronic speed stabilization system maintains the rotational speed at heavy loads
- speed control performed with a potentiometer
- accessories included: Stirrer Ø 160 x 600, 2 x flat spanner for mounting the stirrer

Technical data:
- rated voltage: 230 V
- rated frequency: 50 HZ
- power: 1900 W
- rotation speed: 1 gear 150-300 / 2 gear 300-650 RPM
- thread Type: M14
- protection Class: II
- power cord length: 4M
- weight: 5.8 kg

S055198542	-	1	pc

Diamond drilling rig with micro-impact DBP132



Features:
- ECS
- brushless motor
- micro-impact function
- dry operation
- 2 operating modes
- 2 speeds soft start
- safety clutch
- speed control switch
- lock thermal protection
- high voltage protection
- overcurrent protection
- accessories: 1x 22 / 24 wrench, 1 x user manual, 1 x additional handle, 1 x M18-M16 adapter (SDS plus), 1 x SDS plus drill bit 8*150, 1 x depth gauge, 1 x M18-M16 adapter with center drill, 1 x 82 mm diamond drill bit

Technical data:
- rated power: 1500 W max.
- drilling diameter : 132 mm
- rated voltage: 230 V
- rated frequency: 50-60 Hz
- current intensity: 10 A
- no-load rotational speed in gear 1/2: 0-1500/0-3000 min^{-1}
- no-load stroke frequency in gear 1/2: 0- 24000/0-48000 min^{-1}
- drilling diameter in gear 1/2: 132/72 mm
- spindle thread: M18
- protection class: II
- compatible tripod: DRP202
- cable length: 4 m
- weight: 4.2 kg

S056898599	-	1	pc

Centering pin for adapter



- The centering pin makes it easier to center the diamond hole saw for concrete under cans, which allows for more precise and accurate work. The centering pin was designed for the S-98617 adapter

S053998619	length: 116 mm : working range: 70 mm	1	pc

Adapter for diamond hole saws with centering pin



- designed for drilling rigs with an M18 holder
- allows you to connect a vacuum cleaner
- adapter designed for the DBP132 drilling rig

S053998617	M18-M16 : max drill diameter: 82 mm : centering pin: 70 mm : Vacuum cleaner adapter mounting diameter: from 25 mm to 38 mm	1	pc

M18-M16 SDS plus adapter



- the adapter has been designed for all drilling rigs with an M18 chuck,
- it enables the installation of diamond hole saws for concrete equipped with an M16 chuck,
- the adapter is designed for the DBP132 drilling rig*

S053998621	M18-M16 : SDS plus	1	pc

M18 - 1-1/4" adapter for diamond hole saws



- adapter M18 - 1-1/4"UNC is intended for all drilling rigs with an M18 holder
- possibility of connecting a drilling rig with an M18 holder to larger core drills with a 1-1/4" UNC
- thread type possibility of connecting a vacuum cleaner
- adapter designed for the DBP132 drilling rig

S053998623	M18 - 1-1/4"UNC : vacuum cleaner adapter mounting diameter: 32 mm	1	pc

Diamond drilling rig 2200 W DDP202



Features:
- spindle with double thread
- gearshift knob
- connection to vacuum cleaner
- water connection
- lockable switch and stepless adjustment
- PRCD switch
- power cord made of polyurethane
- vials
- additional handle
- accessories included: wrenches for unscrewing the drill bit, washer for easy removal of accessories, set of replaceable brushes, safety goggles and plugs, rapid connectors for water and air

Technical data:
- 2200W Nominal capacity
- nominal voltage 220-230 V
- nominal frequency 50/60 Hz
- current 10 A
- maks. drilling diameter (portable) 162 mm
- maks. drilling diameter with drill stand 202 mm
- no-load speed 650/1300/2600 rpm
- spindle thread size 1-1/4" UNC & G1/2".
- drilling diameter in teeth 1/2/3 162/82/42
- drilling diameter at drill stand at 1/2/3 speed 202/102/62
- compatible tripod DRP202
- degree of protection IP32
- protection class I
- weight approx. 7.8 kg
- length of power cord 3 m

S056898600	-	1	pc

Diamond drilling rig 3300 W DDP402



Features:
- mandrel
- gearshift knob
- mounting foot
- vial
- water connection with valve
- brushstops
- machine load index
- LED screen
- on-off switch
- control LEDs
- PRCD switch
- accessories included: two wrenches to unscrew the drill bit, plugs, splinterguard, washer to facilitate unscrewing the drill bit, set of carbon brushes

Technical data:
- 3300 W Nominal capacity
- nominal voltage 220-230 V
- nominal frequency 50 / 60 Hz
- current 16 A
- maks. drilling diameter 402 mm
- no-load speed 350/700/1100 rpm
- spindle thread size 1-1/4" UNC
- drilling diameter in gear 1/2/3 402/202/102
- compatible tripod DRP402
- degree of protection IP32
- protection class I
- weight approx. 13.5 kg
- length of power cord 3 m

S056898603	-	1	pc

Diamond drilling rig with micro-impact DBP202



Features:
- ECS
- wet/dry operation
- 2 gears
- 2 operating modes
- micro-impact function
- soft start
- safety clutch
- overcurrent protection
- high voltage protection
- thermal protection
- RCD
- speed control
- switch lock
- accessories: 1 x water quick connector, 1 x vacuum cleaner quick connector, 1 x Front auxiliary handle, 2 x keys; 31 mm, 42 mm, 1 x carbon brushes

Technical data:
- rated power: 2200 W
- max drilling diameter using a stand: 202 mm
- rated voltage: 230 V
- rated frequency: 50-60 Hz
- current: 10 A
- max. drilling diameter (portable): 162 mm
- rotational speed without load in gear 1/2: 0-640/0-1420 min^{-1}
- impact frequency without load in gear 1/2: 0-15360/0-34080 min^{-1}
- drilling diameter in gear 1/ 2: 202/102 mm
- spindle thread: 1-1/4" UNC and 1/2"G
- protection class: II
- compatible tripod: DRP202
- weight: 6.5 kg
- cable length: 3 m

S056898601	-	1	pc

Stand for diamond drill DRP202



Features:
- device holder
- cart
- column
- vials
- transport handle
- level adjustable foot
- gearbox with crank
- wheelchair lock
- inclination

Technical data:
- maximum drilling diameter 202 mm
- dimensions of column 60 x 62 x 850
- travel length 510 mm
- clamp holder size Ø 60 mm
- weight approx. 11.5 kg
- compatible with drilling rig DDP202

S053998606	-	1	pc

Stand for diamond drill DRP402



Features:
- device holder
- cart
- column
- vials
- transport handle
- level adjustable foot
- reduction gear with crank
- wheelchair lock
- transport wheels
- inclination

Technical data:
- maximum drilling diameter 402 mm
- dimensions of column 80 x 75 x 1000
- travel length 650 mm
- mounting plate size 60 mm
- weight approx. 18.5 kg
- compatible with DDP402 drill rig

S053998609	-	1	pc

Hydronet



Features:
- connector
- manometer
- tank
- conveyor belt
- brass pump

Technical data:
- total volume 13 L
- nominal capacity 10 L
- working pressure 1.7-3.8 bar

S053998615	-	1	pc

Tripod anchor kit



S053998612	Size M12x180	1	pc

VCP35LAC construction vacuum cleaner



Features:
- HEPA filter
- automatic filter cleaning
- dry and wet operation
- socket with automatic synchronization function
- antistatic equipment
- stepless power regulation
- accessories: 2 x stainless steel suction pipe (2 x 0.5 m), 1 x floor nozzle 450 mm, 1 x slot nozzle, 1 x round nozzle Ø 75 mm, 1 x HEPA 13 cartridge filter, 1 x adapter for power tools Ø 35 mm, 1 x adapter for power tools Ø 21, 25, 32 mm, 1 x non-woven bag, 1 x suction hose 5 m, antistatic, oil-resistant

Technical data:
- rated power: 1200 W
- max. suction: 250 hPa / mbar (25 kPa)
- rated voltage: 220-240 V
- frequency: 50-60 Hz
- socket: 2200 W
- acoustic power level: LpA 74 dB(A)
- volumetric flow : 74 l/s
- filtration class: L
- container material: plastic
- container capacity: 35 L
- power cord length: 10 m
- suction hose Ø 35 mm: 5 m
- suction pipe Ø 38 mm
- product weight: 16 kg

S055698171	-	1	pc

VCP35MAC construction vacuum cleaner



Features:
- HEPA filter
- automatic filter cleaning
- dry and wet operation
- socket with automatic synchronization function
- antistatic equipment
- stepless power regulation
- adjustment of the diameter of the suction hose
- sound signal and warning light
- accessories: 2 x stainless steel suction pipe (2 x 0.5 m) , 1 x floor nozzle 450 mm, 1 x crevice nozzle, 1 x round nozzle Ø 75 mm, 1 x HEPA 13 cartridge filter, 1 x adapter for power tools Ø 35 mm, 1 x adapter for power tools Ø 21, 25, 32 mm, 1 x non-woven bag, 1 x suction hose 5 m, antistatic, oil-resistant, 1 x suction hose 2.5 m, antistatic, oil-resistant

Technical data:
- rated power: 1200 W
- max. suction: 250 hPa / mbar (25kPa)
- rated voltage: 220-240 V
- frequency : 50-60 Hz
- socket: 2200 W
- acoustic power level: LpA 74 dB(A)
- volume flow: 74 l/s
- filtration class: M
- container material: plastic
- capacity: 35 L
- power cord length: 10 m
- suction hose Ø 35 mm: 5 m
- suction hose Ø 38 mm: 2.5 m
- suction pipe Ø 38 mm
- weight: 16 kg

S055698173	-	1	pc

HEPA filter



- for the VCP35LAC / VCP35MAC vacuum cleaner

S053998183	-	1	pc

Non-woven bag, set of 5 pcs.



- for the VCP35LAC / VCP35MAC vacuum cleaner

S053998181	-	1	pc

Adapter for tool boxes



- adapter for tool boxes for VCP35LAC, VCP35LAC vacuum cleaners - thanks to the adapter, we can transport Systainer*, Tstak Box*, L-Boxx*, metaBOX*, MAKPAC* system boxes

S053998185	-	1	pc

870 W construction dehumidifier DP60L



Features:
- area: 90 m²

Technical data:
- dehumidifying capacity (30 °C 80% RH): 60 L per day
- voltage: 220 V / 50 Hz
- rated power: 790 W
- current: 3.5 A
- ambient temperature range: 5–38 °C
- tank capacity: 7.5 L
- refrigerant: R290*150 g
- airflow: 480 m³/h
- dimensions: 493 x 481 x 824 mm
- weight: 33 kg

S055798425	-	1	pc

1150 W construction dehumidifier DP90L



Features:
- area: 190 m²

Technical data:
- dehumidifying capacity (30 °C 80% RH): 90 L per day
- voltage: 220 V / 50 Hz
- rated power: 940 W
- current: 4.3 A
- temperature range: 5–38 °C
- refrigerant: R290*250 g
- airflow: 1000 m³/h
- dimensions: 610 x 447 x 1003 mm
- weight: 38 kg

S055798427	-	1	pc

1300 W construction dehumidifier DP120L



Features:
- area: 250 m²

Technical data:
- dehumidifying capacity (30 °C 80% RH): 120 L per day
- voltage: 220 V / 50 Hz
- rated power: 1300 W
- current: 6 A
- temperature range: 5–38 °C
- refrigerant: R290*300 g
- airflow: 1300 m³/h
- dimensions: 690 x 522 x 1147 mm
- weight: 50 kg

S055798429	-	1	pc

Piston paint unit PSP380



Features:
- electric, airless paint unit for use in residential buildings.
- APPLICATION: for small and medium-sized housing projects
- MATERIALS: water-based and synthetic paints, acrylic, dispersion paints, varnishes, impregnates, primers
- PURPOSE: for interior painting
- instAClean™ pump filter
- low weight
- pressure regulator with operating indicator

Technical data:
- maximum operating pressure - 207 bar
- maximum flow rate - 1.4 l/min
- maximum nozzle size - 0.019”
- maximum hose length - 45 m
- motor - 7/8 hp
- power supply 230 V
- fuse 16 A
- weight - 13 kg

S056498560	-	1	pc

Piston paint unit PSP555



Features:
- electric paint unit for painting rooms for small and medium-sized contractors
- APPLICATION: from medium to large residential projects and medium-sized industrial buildings
- MATERIALS: water-based and synthetic paints, acrylic, dispersion paints, varnishes, impregnates, primers
- precise control
- LCD display
- industrial quality high torque TEFC DC motor
- lifetime pump body
- large, high-pressure filter
- interchangeable Pro-Duty pump

Technical data:
- maximum operating pressure - 227 bar
- maximum flow rate - 2 l/min
- maximum nozzle size - 0.023”
- maximum hose length - 45 m
- motor - 7/8 hp
- power supply 230 V
- fuse 16 A
- weight - 23 kg

S056498562	-	1	pc

Piston paint unit PSP655



Features:
- electric paint unit for painting large residential and industrial buildings
- APPLICATION: medium for large residential and small commercial projects
- MATERIALS: water-based and synthetic paints, acrylic, dispersion paints, varnishes, impregnates, primers
- LCD display
- lifetime pump body
- handy and functional pull-out frame holder
- high-pressure filter
- interchangeable Pro-Duty pump

Technical data:
- maximum operating pressure - 227 bar
- maximum flow rate - 2.3 l/min
- maximum nozzle size - 0.025”
- maximum hose length - 45 m
- motor - 1.0 hp TEFC DC
- power supply 230 V
- fuse 16 A
- weight - 29 kg

S056498564	-	1	pc

Piston paint sprayer unit TSP1750HR



Features:
- unit for intensive work on large projects requiring heavy-duty products.
- MATERIALS: Putty and finishing compounds, varnishes, impregnates, primers, elastomers, waterproofing agents, epoxy, synthetic, acrylic, water-based, dispersion paints
- mechanical gearbox with reinforced design, made of hardened steel.
- chrome-plated frame with pneumatic wheels
- digital LED display
- brushless fan-cooled motor

Technical data:
- maximum operating pressure 227 bar
- maximum flow rate 5.1 l/min
- maximum nozzle size (1 gun) – 0.039”
- maximum nozzle size (2 guns) 0.029”
- maximum hose length 90 m
- motor power – 2.8 HP
- power supply 230 V
- protection 16 A
- weight – 54 kg

S056498566	-	1	pc

Plastering unit TSP152



Features:
- small, compact, and versatile
- supports all types of ready-to-use materials: fillers and thick paints
- accessories: cart, control panel, 20 l x 9 m mortar hose, spray gun, screw pump, cleaning ball, wrench, 1 x 10 m control cable, DTR

Technical data:
- voltage - 230 V / 50 Hz
- motor power - 2.2 kW
- maximum discharge pressure - 100 bar
- maximum capacity - 6 l/min
- minimum connection cable - 3x1.5 mm²
- dimensions - 900 x 520 x 860 mm
- tank capacity - 57 liters
- weight - 85 kg

S056498568	-	1	pc

Rev-Tip spray nozzle 517



Features:
- nozzles are available in various sizes. They spray all types of paints and varnishes as well as structural materials (putty, etc.)

ARV517	0.017", spraying width: 25 cm, primers/ paints for covering internal and external walls	1	pc
ARV521	0.021", spraying width: 25 cm, primers/ paints for covering internal and external walls	1	pc
ARV213	0.013", spraying width: 10 cm, protective varnishes and paint	1	pc
ARV511	0.011", spraying width: 25 cm, protective varnishes and paint	1	pc
ARV515	0.015", spraying width: 25 cm, primers/ paints for covering internal and external walls	1	pc
ARV519	0.019", spraying width: 25 cm, primers/ paints for covering internal and external walls	1	pc
ARV631	0.031", spraying width: 30 cm, smooth finish/heavy protective coatings/two-component coatings	1	pc
ARV635	0.035", spraying width: 35 cm, smooth finish/heavy protective coatings/two-component coatings	1	pc

Gun extension



Features:
- hydrodynamic nozzles and extensions can be attached directly to the hydrodynamic gun to be used for spraying protruding parts of the ceiling and landings.

Technical data:
- 18” 45 cm

865603	-	1	pc

Repair kit/pump insert PSP 380



Features:
- complete material pump insert for PSP380 unit

17J759	-	1	pc

Filter insert for TSP1750HR 30M – grey



FM2020	Filter 30 mesh grey – smooth	2	pc
FM2021	Filter 60 mesh black – emulsion, acrylic, facade paints	2	pc
FM2022	Filter 100 mesh blue – primers, oil paints	2	pc

Gun filter 009/500 50M blue



Features:
- material filter (emulsions, latex, acrylic, epoxy) for gun 009/500 – mesh size 50

FM2013	-	10	pc

Filter insert for PSP555,PSP655 60M



Features:
- filter 60 mesh black – emulsion, acrylic, facade paints

FM2028	-	2	pc

Hose protection sleeve roll (20 x 15 m)



Features:
- polypropylene hose sleeve to protect against damage and dirt

Technical data:
- 20 x 15 m

865696	-	1	pc

TSO piston oil



Features:
- piston lubrication oil for painting equipment

867670	0.2 l	1	pc
188392	1 l	1	pc

Corochek preservative liquid 1 l



Features:
- maintenance and washing liquid for paint and putty-spraying units. Concentrate, yielding approximately 121 litres of preparation (dilutes with water).
- used for the maintenance of all pumps in hydrodynamic units, particularly during their prolonged shut-down, over 7 days.
- the fluid protects paint units against frost, corrosion and premature wear of components, moisturises and prevents sticking of valves, seals and washers, non-flammable.

865714	1 l	1	pc

REV-GUARD nozzle holder



Features:
- rev-Guard nozzle holder to fit all guns with 7/8" threads

Technical data:
- 7/8”

855052	-	1	pc

High-pressure hose 1/4” x 50’ 15 m



Features:
- the hydrodynamic hose provides greater flexibility and durability. It has swivel couplings and spring guards at both ends to connect hydrodynamic hoses.

Technical data:
- 15 m

865674	-	1	pc

Painting hose



Features:
- for painting units
- resistant to solvents and aggressive liquids
- it has a double braid, which ensures high resistance to damage while maintaining high flexibility

Technical data:
- 15 m
- 3/8"

KX 2.6	-	1	pc

Protective sleeve for a 15 m hose



Features:
- polypropylene hose sleeve protecting against damage and dirt

Technical data:
- 15 m

86569/15M	-	1	pc

High-pressure cleaner HPC180BI



Features:
- induction motor with copper winding
- suction-and-discharge brass pump
- total Stop system
- thermal Protection
- built-in detergent tank
- hose drum
- chemical dosage control
- accessories included: Spray gun with brass fittings, Steel Lance with a quick-connect coupling, Turbo Nozzle, Set of 5 Spray Tips, 10 m Steel Braided High-pressure Hose, Universal Brush, Adapter, Water Filter

Technical data:
- rated voltage: 220-230 V
- rated frequency: 50 HZ
- power: 3000 watt
- maximum pressure: 180 Bar Max
- working pressure: 140 Bar
- 552 L / H Max
- 10 m hose
- weight: 25.6 kg
- protection Class: AND
- power cord length: 5M

S055398902	-	1	pc

Set: 5 quick coupler tips



Features:
- 5 quick coupler spray tips: 0°, 15°, 25°, 40°, detergent

Technical data:
- compatible with cleaner models: S-98902
- if used with the S-98927 metal quick-release lance, it is also suitable for: S-97905

S053998931	-	1	pc

5in1 nozzle



Features:
- 5 spray options in one quick--release tip (0°, 15°, 40°, 0° for detergent, 40° for detergent)

Technical data:
- compatible with cleaner models: S-98902
- if used with the S-98927 metal quick-release lance, it is also suitable for: S-97905

S053998933	-	1	pc

Turbo nozzle



Features:
- efficient: cleans up to 40% faster than a standard nozzle
- robust: powerful, rotating jet removes firmly attached dirt from solid hard surfaces

Technical data:
- compatible with cleaner models: S-98902
- if used with the S-98927 metal quick-release lance, it is also suitable for: S-97905

S053998935	-	1	pc

Adjustable lance



Features:
- precise regulation of the water stream
- made of high-quality materials such as brass, Inox for longer service life
- designed for cleaning large surfaces

Technical data:
- compatible with cleaner models: S-97905, S-98902

S053998923	-	1	pc

Turbo lance



Features:
- high-quality Turbo lance cleans up to 40% faster than a standard nozzle
- strong rotating jet effectively removes dirt from solid, hard surfaces

Technical data:
- compatible with cleaner models: S-97905, S-98902

S053998925	-	1	pc

Metal quick-release lance



Features:
- metal lance made of high-quality materials, equipped with brass tips, including ball-bearing quick--connect coupler for trouble-free installation of accessories

Technical data:
- compatible with cleaner models: S-97905, S-98902

S053998927	-	1	pc

Foam gun



Features:
- high-performance, non-contact foamer for foam thickness
- the option to adjust detergent volume to the flow with a simple turn of the knob
- spray angle adjustment

Technical data:
- compatible with cleaner models: S-97901, S-97903, S-97905, S-98902

S053998921	-	1	pc

High-pressure cleaner gun



Features:
- high-quality high-pressure cleaner gun with a threaded connection and trigger lock

Technical data:
- compatible with cleaner models: S-97905, S-98902

S053998929	-	1	pc

Adapter



Features:
- adapter for easy connection with accessories

Technical data:
- compatible with cleaner models: S-97905, S-98902

S053998937	-	1	pc

10 m steel braided high-pressure hose



Features:
- high-pressure hose with a durable, flexible, kink-free structure, resistant to adverse weather conditions and abrasions

Technical data:
- 10 m
- maks. 200 bar
- compatible with the S-98902 model

S053998939	-	1	pc

Extension hose for pressure washer



Features:
- high-pressure hose with robust, flexible construction resistant to kinking, adverse weather conditions and abrasion

Technical data:
- 10 m
- max 200 bar
- suitable for washer models: S-97905 & S-98902

S053998942	-	1	pc

Powerpulse 4 A car battery charger



Features:
- microprocessor-controlled charger
- battery types: WET, MF, GEL, AGM, EFB, LFP
- reverse polarity protection
- spark protection
- overvoltage protection
- overcurrent protection
- overheating protection
- overcharge protection
- maintenance mode
- reconditioning mode
- winter mode
- 2 connection types (clamps or o-ring terminals)

Technical data:
- charging current: 4 A
- battery voltage: 6 V / 12 V
- power: 70 W
- AC voltage: 220–240 V, 50 Hz
- charging stages: 10 stages, fully automatic
- charging modes: 7 modes
- cable length: 1.5 m
- battery capacity: 4–120 Ah
- protection rating: IP65
- dimensions: 192 x 82 x 50 mm

S056598750	-	1/10	pc

Powerpulse 10 A car battery charger



Features:
- microprocessor-controlled charger
- battery types: WET, MF, GEL, AGM, EFB, LFP
- reverse polarity protection
- spark protection
- overvoltage protection
- overcurrent protection
- overheating protection
- overcharge protection
- maintenance mode
- reconditioning mode
- winter mode
- 2 connection types (clamps or o-ring terminals)

Technical data:
- charging current: 10 A
- battery voltage: 6 V / 12 V
- power: 160 W
- AC voltage: 220–240 V, 50 Hz
- charging stages: 10 stages, fully automatic
- charging modes: 7 modes
- cable length: 1.5 m
- battery capacity: 4–200 Ah
- protection rating: IP65
- dimensions: 242 x 102 x 62 mm

S056598754	-	1/10	pc

Powerpulse 6 A car battery charger



Features:
- microprocessor-controlled charger
- battery types: WET, MF, GEL, AGM, EFB, LFP
- reverse polarity protection
- spark protection
- overvoltage protection
- overcurrent protection
- overheating protection
- overcharge protection
- maintenance mode
- reconditioning mode
- winter mode
- 2 connection types (clamps or o-ring terminals)

Technical data:
- charging current: 6 A
- battery voltage: 6 V / 12 V
- power: 100 W
- AC voltage: 220–240 V, 50 Hz
- charging stages: 10 stages, fully automatic
- charging modes: 7 modes
- cable length: 1.5 m
- battery capacity: 4–150 Ah
- protection rating: IP65
- dimensions: 240 x 88 x 58 mm

S056598752	-	1/10	pc

Powerpulse 15 A car battery charger



Features:
- microprocessor-controlled charger
- battery types: WET, MF, GEL, AGM, EFB, LFP
- reverse polarity protection
- spark protection
- overvoltage protection
- overcurrent protection
- overheating protection
- overcharge protection
- maintenance mode
- DC power supply mode

Technical data:
- charging current: 15 A
- battery voltage: 12 V / 24 V
- power: 300 W
- AC voltage: 220–240 V, 50 Hz
- charging stages: 6 stages, fully automatic
- charging modes: 4 modes
- cable length: 1.5 m
- battery capacity: 4–300 Ah
- protection rating: IP20
- dimensions: 240 x 152 x 98 mm

S056598756	-	1/6	pc

Jumppulse car jump starter



Features:
- fast starting of most 12 V petrol and diesel vehicles (up to 8.0 l petrol and 6.0 l diesel engines)
- overcharge protection
- short-circuit protection
- discharge protection
- overheating protection
- reverse polarity protection
- charging of smartphones, tablets and other devices
- USB with high PD60W output for laptops
- power supply for car fridges, pumps and other 12 V devices
- LED flashlight (flashlight/SOS/ strobe)
- intelligent 8 AWG booster cable with large clamps

Technical data:
- start: 12 V battery
- capacity: 20000 mAh / 74.0 Wh
- input: bidirectional PD 60 W
- output: PD 60 W
- DC output: 12–16 V / 10 A
- USB ports: 1 x USB, 1 x USB 3.0, 1 x USB-C
- charging time: approx. 2.5 h
- starting current: 1000 A
- peak current: 2000 A (intelligent cable)
- temperature range: -20 °C to 60 °C
- lifetime: >1000 cycles
- dimensions: 227 x 59 x 101 mm
- weight: 910 g

S056598758	-	1/10	pc

Jumppulse air car jump starter



Features:
- fast starting of most 12 V petrol and diesel vehicles (up to 6.0 l petrol and 3.0 l diesel engines)
- overcharge protection
- short-circuit protection
- discharge protection
- overheating protection
- reverse polarity protection
- charging of smartphones, tablets and other devices
- USB with high PD60W output for laptops
- power supply for car fridges, pumps and other 12 V devices
- LED flashlight (flashlight/SOS/ strobe)
- intelligent 10 AWG booster cable with large clamps
- built-in air pump with max. pressure 8.2 bar (120 psi) for inflating tyres

Technical data:
- start: 12 V battery
- capacity: 12000 mAh / 44.4 Wh
- input: 5 V / 2 A, 9 V / 2 A
- output:
- USB ports: 1 x USB, 1 x USB 3.0, 1 x USB-C
- charging time: approx. 3–6 h
- starting current: 600 A
- peak current: 1200 A
- compressor performance: 8.3 bar / 120 psi
- temperature range: -20 °C to 60 °C
- lifetime: >1000 cycles
- dimensions: 255 x 100 x 50 mm
- weight: 870 g

S056598762	-	1/8	pc

Jumppulse pro car jump starter



Features:
- fast starting of most 12 V petrol and diesel vehicles (up to 12.0 l petrol and 10.0 l diesel engines)
- overcharge protection
- short-circuit protection
- discharge protection
- overheating protection
- reverse polarity protection
- charging of smartphones, tablets and other devices
- USB with high PD60W output for laptops
- power supply for car fridges, pumps and other 12 V devices
- LED flashlight (flashlight/SOS/ strobe)
- built-in intelligent 5 AWG booster cable with large clamps

Technical data:
- start: 12 V battery
- capacity: 32000 mAh / 118.4 Wh
- input: bidirectional PD 60 W
- output: PD 60 W
- DC output: 12–16 V / 10 A
- USB ports: 1 x USB, 1 x USB 3.0, 1 x USB-C
- charging time: approx. 3–10 h
- starting current: 2000 A
- peak current: 4000 A (built-in intelligent cable)
- temperature range: -20 °C to 60 °C
- lifetime: >1000 cycles
- dimensions: 311 x 152 x 65 mm
- weight: 2.2 kg

S056598760	-	1/6	pc

Power generator



Features:
- portable single-phase generator recommended for single-phase receivers not fitted with sensitive electronic systems
- compact and ergonomic design
- thermal switch and oil level sensor
- high-quality Synchron generator and Honda GX200 engine ensuring long and failure-free operation of the device
- ideal for long hours of uninterrupted work

Technical data:
- 1-phase
- power max. / rated 3 kW / 2.7 kW
- voltage 230 V
- 2 x 16 A 230 V Schuko socket
- fuel type Petrol
- capacity: 3.1 L tank
- 4-stroke engine Honda GX200
- weight: 38 kg

P-1030	-	1	pc

Equipment with combustion engine

Power generator



Features:
- portable single-phase generator recommended for single-phase receivers not fitted with sensitive electronic systems
- thermal switch and oil level sensor
- high-quality Synchron generator and Honda GX390 engine ensuring long and failure-free operation of the device
- ideal for long hours of uninterrupted work

Technical data:
- 1-phase
- power max. / rated 6.2 kW / 5.6 kW
- voltage 230 V
- 1 x 16 A 230 V Schuko socket 1 x 32 A 3P IP44 socket
- fuel type Petrol
- capacity: 6.2 L tank
- 4-stroke engine Honda GX390
- weight: 70 kg

P-1062	-	1	pc

Power generator



Features:
- portable single-phase generator, designed to supply devices that require stabilized current parameters
- thanks to the AVR system, it is perfect for powering electronic devices or other equipment that requires stable current parameters
- thermal switch and oil level sensor
- high-quality Synchron generator and Honda GX390 engine ensuring long and failure-free operation of the device
- ideal for long hours of uninterrupted work
- high-quality Automatic Voltage Regulation system (AVR) – voltage regulation +/- 2%

Technical data:
- 1-phase
- power max. / rated 6.2 kW / 5.6 kW
- voltage 230 V
- 1 x 16 A 230 V Schuko socket 1 x 32 A 3P socket IP44
- aVR digital voltage stabilisation
- fuel type Petrol
- tank capacity: 6.2 L
- 4-stroke engine Honda GX390
- weight: 70 kg

P-1062R	-	1	pc

Power generator



Features:
- high-power, three-phase and single-phase portable generator characterized by very low fuel consumption and high rated power
- allows connecting all kinds of tools
- suitable for all three-phase and single-phase devices not fitted with sensitive electronic systems
- thermal switch, magneto--thermal switch and oil level sensor
- high-quality Synchron generator and Honda GX390 engine ensuring long and failure-free operation of the device
- ideal for long hours of uninterrupted work

Technical data:
- 3-phase
- power 3~ max. / rated 8.7 kVA / 7.8 kVA (cos 0.8)
- 1~ max. power / rated 6.2 kW / 5.6 kW
- voltage 400 V / 230 V
- 1 x 16 A 230 V Schuko socket 1 x 16 A 5P IP44 socket
- fuel type Petrol
- capacity: 6.2 L tank
- 4-stroke engine Honda GX390
- weight: 89 kg

P-3087	-	1	pc

Power generator



Features:
- high-power, three-phase and single--phase portable generator characterized by very low fuel consumption and high rated power
- allows connecting all kinds of tools.
- designed to supply devices that require stabilized current parameters
- thanks to the AVR system, it is perfect for powering electronic devices or other equipment that requires stable current parameters
- thermal switch, magneto-thermal switch and oil level sensor
- high-quality Synchron generator and Honda GX390 engine ensuring long and failure-free operation of the device
- ideal for long hours of uninterrupted work
- high-quality Automatic Voltage Regulation system (AVR) – voltage regulation +/- 1%

Technical data:
- 3-phase
- power 3~ max. / rated 8.7 kVA / 7.8 kVA (cos 0.8)
- 1~ max. power / rated 6.2 kW / 5.6 kW
- voltage 400 V / 230 V
- 1 x 16 A 230 V Schuko socket 1 x 16 A 5P socket IP44
- digital voltage stabilisation AVR
- fuel type Petrol
- capacity: 6.2 L tank
- 4-stroke engine Honda GX390
- weight: 89 kg

P-3087R	-	1	pc

STALCO



POWER TOOL
ACCESSORIES

Bits

1/4” Phillips head



- made of S2 steel for increased strength

S-13101	1 x 25 mm	20/2000	pc
S-13102	2 x 25 mm	20/2000	pc
S-13103	3 x 25 mm	20/2000	pc

1/4” Pozidriv head



- made of S2 steel for increased strength

S-13201	1 x 25 mm	20/2000	pc
S-13202	2 x 25 mm	20/2000	pc
S-13203	3 x 25 mm	20/2000	pc

1/4” Torx head



- made of S2 steel for increased strength

S-13310	T10 x 25 mm	20/2000	pc
S-13315	T15 x 25 mm	20/2000	pc
S-13320	T20 x 25 mm	20/2000	pc
S-13325	T25 x 25 mm	20/2000	pc
S-13330	T30 x 25 mm	20/2000	pc
S-13340	T40 x 25 mm	20/2000	pc

1/4” Head with stopper



- made of S2 steel for increased strength

S-13182	plastic stopper	5/500	pc
S-13192	metal stopper	10/1000	pc

Head with magnet



- made of high quality steel
- for quick mounting of hex screws
- grip ¼”

S-13606	6 mm	5/100/500	pc
S-13608	8 mm	5/100/500	pc
S-13610	10 mm	5/100/500	pc
S-13613	13 mm	5/100/500	pc

1/4” 1/4” Magnetic bit holder



- magnetic holder coating chromed and varnished

S-13550	60 mm	5/120/360	pc

Bit and accessory set 1/4”, 11 elements

S2



- anti-corrosion coating

S-13720	S2 60 mm	1/6/24	pc

Bit, socket and accessory set 1/4”, 19 elements

S2



- anti-corrosion coating

S-13722	S2	1/6/24	pc

Impact bit and accessory set 1/4”, 26 elements

SHOCK REDUCTION S2



S-13724	S2	1/6/24	pc

HSS impact bit and drill bit set 1/4”, 48 elements

SHOCK REDUCTION S2



S-13732	S2	1/5/10	pc

Precision bit and accessory set 1/4”, 31 elements

S2



S-13726	S2	1/6/24	pc

Bit and socket set with 1/4” adapter, 50 elements

S2



S-13734	S2	1/6/24	pc

Bit and adapter set 1/4”, 32 elements

S2



- anti-corrosion coating

S-13728	S2	1/6/24	pc

Impact bit and socket set 1/4”, 54 elements

SHOCK REDUCTION S2



S-13736	S2	1/5/10	pc

Impact bit and socket set with 1/4” adapter, 34 elements

SHOCK REDUCTION S2



S-13730	S2	1/6/24	pc

Drills

HSS metal drill bit



- according to DIN 338
- double split angle 135°/35°
- good sharpness
- hardness: 61~63 HRC
- drill

S-23130	Ø 1 x 34 mm	12 mm	10/100/4000	pc
S-23132	Ø 1,5 x 40 mm	18 mm	10/100/4000	pc
S-23134	Ø 2 x 49 mm	24 mm	10/100/4000	pc
S-23136	Ø 2,5 x 57 mm	30 mm	10/100/4000	pc
S-23138	Ø 3 x 61 mm	33 mm	10/100/4000	pc
S-23140	Ø 3,2 x 65 mm	36 mm	10/100/4000	pc
S-23142	Ø 3,5 x 70 mm	39 mm	10/100/3000	pc
S-23144	Ø 4 x 75 mm	43 mm	10/100/3000	pc
S-23146	Ø 4,2 x 75 mm	43 mm	10/100/3000	pc
S-23148	Ø 4,5 x 80 mm	47 mm	10/100/3000	pc
S-23150	Ø 4,8 x 86 mm	52 mm	10/100/3000	pc
S-23152	Ø 5 x 86 mm	52 mm	10/100/3000	pc
S-23154	Ø 5,1 x 86 mm	52 mm	10/50/2000	pc
S-23156	Ø 5,2 x 86 mm	52 mm	10/50/2000	pc
S-23158	Ø 5,5 x 93 mm	57 mm	10/50/2000	pc
S-23160	Ø 6 x 93 mm	57 mm	10/50/2000	pc
S-23162	Ø 6,5 x 101 mm	63 mm	10/50/1000	pc
S-23164	Ø 6,8 x 109 mm	69 mm	10/50/1000	pc
S-23166	Ø 7 x 109 mm	69 mm	10/50/1000	pc
S-23168	Ø 7,5 x 109 mm	69 mm	10/50/500	pc
S-23170	Ø 8 x 117 mm	75 mm	5/50/450	pc
S-23172	Ø 8,5 x 117 mm	75 mm	5/50/450	pc
S-23174	Ø 9 x 125 mm	81 mm	5/50/450	pc
S-23176	Ø 9,5 x 125 mm	81 mm	5/50/450	pc
S-23178	Ø 10 x 133 mm	87 mm	5/50/450	pc
S-23180	Ø 10,2 x 133 mm	87 mm	5/25/200	pc
S-23182	Ø 10,5 x 133 mm	87 mm	5/25/200	pc
S-23184	Ø 11 x 142 mm	94 mm	5/25/200	pc
S-23186	Ø 11,5 x 142 mm	94 mm	5/25/200	pc
S-23188	Ø 12 x 151 mm	101 mm	5/25/200	pc
S-23190	Ø 12,5 x 151 mm	101 mm	5/25/200	pc
S-23192	Ø 13 x 151 mm	101 mm	5/25/200	pc

Metal HSS drill bits



- according to DIN 338
- double split angle 135°/35°
- good sharpness
- hardness: 61~63 HRC
- drill

S-23194	diameter: KPL. Ø 2.0 - 8.0 mm	1/50/100	set

Metal HSS drill bits



- according to DIN 338
- double split angle 135°/35°
- good sharpness
- hardness: 61~63 HRC
- drill

S-23196	diameter: KPL. Ø 1.0 - 10.0 mm	1/20/40	set

Cobalt metal drill S C



- point angle 135°
- high drilling performance
- high durability and heat resistance
- manufactured in accordance with DIN 338

S-24010	Ø 1 x 34 mm	12 mm	3/100	pc
S-24015	Ø 1,5 x 40 mm	18 mm	3/300	pc
S-24020	Ø 2 x 49 mm	24 mm	3/180	pc
S-24025	Ø 2,5 x 57 mm	30 mm	3/150	pc
S-24030	Ø 3 x 61 mm	33 mm	2/80	pc
S-24032	Ø 3,2 x 65 mm	36 mm	2/150	pc
S-24035	Ø 3,5 x 70 mm	39 mm	2/100	pc
S-24038	Ø 3,8 x 75 mm	43 mm	2/100	pc
S-24040	Ø 4 x 75 mm	43 mm	1/50	pc
S-24042	Ø 4,2 x 75 mm	43 mm	1/100	pc
S-24045	Ø 4,5 x 80 mm	47 mm	1/50	pc
S-24048	Ø 4,8 x 86 mm	52 mm	1/50	pc
S-24050	Ø 5 x 86 mm	52 mm	1/50	pc
S-24055	Ø 5,5 x 93 mm	57 mm	1/50	pc
S-24060	Ø 6 x 93 mm	57 mm	1/50	pc
S-24065	Ø 6,5 x 101 mm	63 mm	1/50	pc
S-24067	Ø 6,7 x 101 mm	63 mm	1/50	pc
S-24070	Ø 7 x 109 mm	69 mm	1/50	pc
S-24075	Ø 7,5 x 109 mm	69 mm	1/50	pc
S-24080	Ø 8 x 117 mm	75 mm	1/40	pc
S-24085	Ø 8,5 x 117 mm	75 mm	1/50	pc
S-24090	Ø 9 x 125 mm	81 mm	1/50	pc
S-24100	Ø 10 x 133 mm	87 mm	1/50	pc
S-24120	Ø 12 x 151 mm	101 mm	1/30	pc

Masonry drill S CL



S-25040	Ø 4 x 75 mm	40 mm	1/100/1000	pc
S-25050	Ø 5 x 85 mm	50 mm	1/100/1000	pc
S-25051	Ø 5 x 159 mm	90 mm	1/100/1000	pc
S-25060	Ø 6 x 100 mm	60 mm	1/100/1000	pc
S-25061	Ø 6 x 150 mm	90 mm	1/100/1000	pc
S-25062	Ø 6 x 200 mm	150 mm	1/100/1000	pc
S-25071	Ø 7 x 100 mm	60 mm	1/100/1000	pc
S-25081	Ø 8 x 120 mm	80 mm	1/50/500	pc
S-25082	Ø 8 x 200 mm	150 mm	1/50/300	pc
S-25100	Ø 10 x 150 mm	100 mm	1/50/500	pc
S-25101	Ø 10 x 120 mm	80 mm	1/50/400	pc
S-25102	Ø 10 x 200 mm	150 mm	1/50/300	pc
S-25103	Ø 10 x 300 mm	250 mm	1/50/200	pc
S-25104	Ø 10 x 400 mm	350 mm	1/50/100	pc
S-25106	Ø 10 x 600 mm	550 mm	1/50/100	pc
S-25121	Ø 12 x 150 mm	90 mm	1/50/250	pc
S-25122	Ø 12 x 200 mm	150 mm	1/50/150	pc
S-25123	Ø 12 x 300 mm	250 mm	1/50/150	pc
S-25124	Ø 12 x 400 mm	350 mm	1/50/100	pc

Masonry drills S CL



- universal use on various substrates (brick, silica brick, etc.)
- high drilling performance and high durability
- plastic box for storage and transport

S-25410	Ø 4,0 ; 5,0 ; 6,0 ; 8,0 ; 10,0 mm	1/10/100	set
S-25310	Ø 3,0 ; 4,0 ; 5,0 ; 6,0 ; 7,0 ; 8,0 ; 9,0 ; 10,0 mm	1/10/50	set

Concrete drills S SDS



- universal use
- high drilling performance
- high durability
- plastic box for storage and transport
- Ø 5,0 ; 6,0 ; 8,0 ; 8,0 ; 10,0 ; 12,0 mm

S-26512	Ø 5.0 - Ø 12,0 mm	1/40	set

Concrete drill S SDS



- universal use
- high drilling performance
- high durability

S-26041	Ø 4 x 110 mm	50 mm	1/10	pc
S-26051	Ø 5 x 110 mm	50 mm	1/10/200	pc
S-26052	Ø 5 x 160 mm	100 mm	1/10/200	pc
S-26061	Ø 6 x 110 mm	50 mm	1/10/200	pc
S-26062	Ø 6 x 160 mm	100 mm	1/10/200	pc
S-26063	Ø 6 x 210 mm	150 mm	1/10/200	pc
S-26071	Ø 7 x 160 mm	100 mm	1/10/200	pc
S-26081	Ø 8 x 110 mm	50 mm	1/10/200	pc
S-26082	Ø 8 x 160 mm	100 mm	1/10/200	pc
S-26083	Ø 8 x 210 mm	150 mm	1/10/100	pc
S-26084	Ø 8 x 260 mm	200 mm	1/10/100	pc
S-26085	Ø 8 x 300 mm	240 mm	1/10/100	pc
S-26086	Ø 8 x 350 mm	290 mm	1/10/100	pc
S-26087	Ø 8 x 450 mm	390 mm	1/10/50	pc
S-26101	Ø 10 x 110 mm	50 mm	1/10/200	pc
S-26102	Ø 10 x 160 mm	100 mm	1/10/200	pc
S-26103	Ø 10 x 210 mm	150 mm	1/10/100	pc
S-26104	Ø 10 x 260 mm	200 mm	1/10/100	pc
S-26105	Ø 10 x 310 mm	250 mm	1/10/100	pc
S-26106	Ø 10 x 350 mm	290 mm	1/10/100	pc
S-26107	Ø 10 x 450 mm	390 mm	1/10/50	pc
S-26108	Ø 10 x 600 mm	540 mm	1/10/50	pc
S-26110	Ø 10 x 1000 mm	940 mm	1/10/20	pc
S-26121	Ø 12 x 160 mm	100 mm	1/10/100	pc
S-26122	Ø 12 x 210 mm	150 mm	1/10/100	pc
S-26123	Ø 12 x 260 mm	200 mm	1/10/100	pc
S-26124	Ø 12 x 300 mm	240 mm	1/10/50	pc
S-26125	Ø 12 x 350 mm	290 mm	1/10/50	pc
S-26126	Ø 12 x 460 mm	400 mm	1/10/50	pc
S-26127	Ø 12 x 600 mm	540 mm	1/5/20	pc
S-26130	Ø 12 x 1000 mm	940 mm	1/10	pc
S-26141	Ø 14 x 160 mm	100 mm	1/10/100	pc
S-26142	Ø 14 x 210 mm	150 mm	1/10/50	pc
S-26143	Ø 14 x 260 mm	200 mm	1/10/50	pc
S-26144	Ø 14 x 300 mm	240 mm	1/10/50	pc
S-26145	Ø 14 x 350 mm	290 mm	1/5/20	pc
S-26146	Ø 14 x 450 mm	390 mm	1/5	pc
S-26147	Ø 14 x 600 mm	540 mm	1/10/20	pc
S-26150	Ø 14 x 1000 mm	940 mm	1/10	pc
S-26162	Ø 16 x 210 mm	150 mm	1/10/50	pc
S-26163	Ø 16 x 260 mm	200 mm	1/10/50	pc
S-26164	Ø 16 x 300 mm	240 mm	1/5/40	pc
S-26165	Ø 16 x 350 mm	290 mm	1/5/20	pc
S-26166	Ø 16 x 450 mm	390 mm	1/5/20	pc
S-26167	Ø 16 x 600 mm	540 mm	1/10	pc
S-26170	Ø 16 x 1000 mm	940 mm	1/10	pc
S-26182	Ø 18 x 210 mm	150 mm	1/5/50	pc
S-26183	Ø 18 x 300 mm	240 mm	1/5	pc
S-26184	Ø 18 x 450 mm	390 mm	1/5/20	pc
S-26186	Ø 18 x 600 mm	540 mm	1/10	pc
S-26190	Ø 18 x 1000 mm	940 mm	1/10	pc
S-26202	Ø 20 x 210 mm	150 mm	1/5	pc
S-26203	Ø 20 x 300 mm	240 mm	1/5/40	pc
S-26204	Ø 20 x 450 mm	390 mm	1/5/20	pc
S-26206	Ø 20 x 600 mm	540 mm	1/10	pc
S-26210	Ø 20 x 1000 mm	940 mm	1/10	pc
S-26223	Ø 22 x 300 mm	240 mm	1/5	pc
S-26224	Ø 22 x 450 mm	390 mm	1/2/10	pc
S-26226	Ø 22 x 600 mm	540 mm	1/10	pc
S-26243	Ø 24 x 300 mm	240 mm	1/10/20	pc
S-26244	Ø 24 x 450 mm	390 mm	1/10	pc
S-26253	Ø 25 x 300 mm	240 mm	1/10/20	pc
S-26254	Ø 25 x 450 mm	390 mm	1/10	pc

SX5 concrete drill bit



- designed for drilling in reinforced concrete
- long service life
- fast and smooth drilling
- good dust removal
- centering tip makes starting the hole easier
- very good overall performance

S060226302	Ø 6,0 x 110 mm	55 mm	1/10/200	pc
S060226304	Ø 6,0 x 160 mm	105 mm	1/10/200	pc
S060226306	Ø 6,0 x 210 mm	155 mm	1/10/200	pc
S060226308	Ø 6,0 x 260 mm	205 mm	1/10/200	pc
S060226310	Ø 8,0 x 160 mm	105 mm	1/10/200	pc
S060226312	Ø 8,0 x 210 mm	155 mm	1/10/200	pc
S060226314	Ø 8,0 x 260 mm	205 mm	1/10/200	pc
S060226316	Ø 10,0 x 160 mm	105 mm	1/10/200	pc
S060226318	Ø 10,0 x 210 mm	155 mm	1/10/200	pc
S060226320	Ø 10,0 x 260 mm	205 mm	1/10/100	pc
S060226322	Ø 10,0 x 310 mm	255 mm	1/10/100	pc
S060226324	Ø 10,0 x 460 mm	405 mm	1/10/100	pc
S060226326	Ø 12,0 x 160 mm	105 mm	1/10/200	pc
S060226328	Ø 12,0 x 210 mm	155 mm	1/10/200	pc
S060226330	Ø 12,0 x 260 mm	205 mm	1/10/100	pc
S060226332	Ø 12,0 x 310 mm	255 mm	1/10/100	pc
S060226334	Ø 12,0 x 460 mm	405 mm	1/10/100	pc
S060226336	Ø 14,0 x 210 mm	155 mm	1/10/100	pc
S060226338	Ø 14,0 x 260 mm	205 mm	1/10/100	pc
S060226340	Ø 16,0 x 210 mm	155 mm	1/10/100	pc
S060226342	Ø 16,0 x 260 mm	205 mm	1/10/50	pc

SX5 Concrete Drill Bit



- designed for drilling in reinforced concrete
- long service life
- fast and smooth drilling
- good dust removal
- centering tip makes starting the hole easier
- very good overall performance

S060226405	Ø 6,0 - Ø 12,0 mm, 5 el.	1/48	pc

Wood drills



- drills made of high grade steel
- blade with a sharp tip
- cylindrical handle
- Ø 3, 4, 5, 6, 7, 8, 9, 10 mm

S-27310	Ø 3.0 - Ø 10,0 mm	1/10/100	set

Wood drills



- drills made of high grade steel
- blade with a sharp tip
- cylindrical handle
- Ø 4, 5, 6, 7, 8, 9, 10 mm

S-27412	Ø 4.0 - Ø 10.0 x 300 mm	1/5/30	set

Feather drills



- universal use for wood
- hexagonal handle
- Ø 10, 12, 16, 18, 20, 25 mm

S-27125	Ø 10.0 - Ø 25.0 mm	1/25/50	set

Confirmat drills



- three-step confirmat drill with replaceable pilot drill
- size best suited to confirmats found on the market

S-27306	Ø 6.4 mm	1	pc
S-27307	Ø 7.0 mm	1	pc

Aerated concrete drill



- galvanized steel sheet
- HEX handle

S-37761	Ø 80 mm	1/50	pc

Drills for glass



- tip made of tungsten carbide
- abrasion -resistant
- precise drilling
- also ideal for ceramic tiles

S-23201	Ø 3.0 x 50 mm	1/100	pc
S-23204	Ø 4.0 x 60 mm	1/100/1000	pc
S-23207	Ø 5.0 x 70 mm	1/100	pc
S-23210	Ø 6.0 x 75 mm	1/100	pc
S-23213	Ø 8.0 x 80 mm	1/50	pc
S-23216	Ø 10.0 x 100 mm	1/50	pc
S-23219	Ø 12.0 x 100 mm	1/60	pc

Concrete chisel set



- SDS plus handle
- chisel made of high-grade steel with high material removal capacity during crushing

S-28225	SDS plus ; 250 mm	1/5/25	set

Concrete chisel



- SDS max handle
- chisel made of high-grade steel with high material removal capacity during crushing

S-26601	SDS max ; 400 mm	1/25	pc
S-26603	SDS max ; 50 x 400 mm	1/25	pc
S-26605	SDS max ; 25 x 400 mm	1/25	pc

Openers and diamond technology

Diamond drills



- diamond-coated cutting edges
- body shaped from a single piece of steel
- cylindrical handle
- impact-free drilling of holes in glass, marble, granite and other ceramic materials

S-28406	Ø 6 mm	1/10/100	pc
S-28408	Ø 8 mm	1/10/100	pc
S-28410	Ø 10 mm	1/10/100	pc
S-28412	Ø 12 mm	1/10/100	pc

Diamond hole saw



- diamond-coated cutting edges
- body shaped from a single piece of steel
- cylindrical handle
- impact-free drilling of holes in glass, marble, granite and other ceramic materials

S-28418	Ø 18 mm	1/5/20	pc
S-28420	Ø 20 mm	1/5/20	pc
S-28425	Ø 25 mm	1/5/20	pc
S-28430	Ø 30 mm	1/5/20	pc
S-28435	Ø 35 mm	1/5/20	pc
S-28438	Ø 38 mm	1/5/20	pc
S-28445	Ø 45 mm	1/5/20	pc
S-28455	Ø 55 mm	1/5/20	pc
S-28465	Ø 65 mm	1/5/20	pc
S-28468	Ø 68 mm	1/5/20	pc
S-28475	Ø 75 mm	1/5/20	pc

Diamond drills



- diamond-coated cutting edges
- cylindrical handle
- body shaped from a single piece of steel
- guide handle with suction and a cooling channel
- impact-free drilling of holes in glass, marble, granite and other ceramic materials
- plastic case
- Ø 4, 5, 6, 7, 8, 10, 12 mm

S-28427	Ø 4 - Ø 12 mm	1/5/40	pc

Diamond hole saw set



- diamond-coated cutting edges
- cylindrical handle
- body shaped from a single piece of steel
- guide handle with suction and a cooling channel
- impact-free drilling of holes in glass, marble, granite and other ceramic materials
- plastic case
- Ø 6, 8, 10, 16, 30, 35 mm

S-28426	Ø 6 - Ø 35 mm	1/20	pc

Hole saw



- for cutting holes in PVC, plasterboard, plywood

S-27912	Ø 30 - Ø 120 mm	1/10/40	pc

Concrete hole saw



- hole saw with carbide
- M22 thread

S-28065	Ø 65 mm	1/25	pc
S-28085	Ø 80 mm	1/25	pc

Hole saw



- for cutting holes in ceramic tiles

S-28320	Ø 20 - Ø 90 mm	1/20/80	pc

Hole saw with tungsten coating



- for concrete, ceramic tiles (not suitable for stoneware)
- plastic box
- Ø 33, 53, 67, 73, 83 mm

S-28306	Ø 33 - Ø 73 mm	1/10	pc

Adapter for concrete hole saws - SDS Plus



- M22 thread

S-28211	SDS plus 110 mm	1/25/50	pc
S-28235	SDS plus 350 mm	1/20	pc

Wood hole saw



- plastic case for storage and transport
- for wood, plywood, PVC
- S-27908: Ø 63, 76, 89, 102, 127 mm
- S-27911: Ø 19, 25, 29, 32, 38, 44, 51, 63 mm

S-27908	Ø 63 - Ø 127 mm	1/20	set
S-27911	Ø 19 - Ø 63 mm	1/40	set

Adapter for concrete hole saws - Hex



- M22 thread

S-28110	HEX 11 x 110 mm	1/25/50	pc
S-28135	HEX 13 x 350 mm	1/20	pc

Saws and blades

Segmented diamond disc



▪ for dry cutting

S-29011	Ø 115 mm	1/50/100	pc
S-29012	Ø 125 mm	1/50/100	pc
S-29018	Ø 180 mm	1/25/50	pc
S-29023	Ø 230 mm	1/25	pc
S-29030	Ø 300 mm	1/10	pc
S-29035	Ø 350 mm	1/10	pc

Turbo diamond disc



▪ for dry cutting

S-29411	Ø 115 mm	1/50/100	pc
S-29412	Ø 125 mm	1/50/100	pc
S-29423	Ø 230 mm	1/25	pc

Segmented diamond disc



▪ for dry cutting

S-30011	Ø 115 mm	1/50/100	pc
S-30012	Ø 125 mm	1/50/100	pc
S-30018	Ø 180 mm	1/25/50	pc
S-30023	Ø 230 mm	1/25	pc

Turbo diamond disc



▪ for dry cutting

S-30411	Ø 115 mm	1/50/100	pc
S-30412	Ø 125 mm	1/50/100	pc
S-30418	Ø 180 mm	1/25/50	pc
S-30423	Ø 230 mm	1/25	pc

Continuous diamond disc



▪ for wet cutting

S-29211	Ø 115 mm	1/50/100	pc
S-29212	Ø 125 mm	1/50/100	pc
S-29218	Ø 180 mm	1/25/50	pc
S-29223	Ø 230 mm	1/25	pc

Continuous diamond disc



▪ for wet cutting

S-30211	Ø 115 mm	1/50/100	pc
S-30212	Ø 125 mm	1/50/100	pc
S-30218	Ø 180 mm	1/25/50	pc
S-30223	Ø 230 mm	1/25	pc

Diamond blade for ceramics



▪ for cutting glaze, ceramics, stone-ware, porcelain, marble

S-29214	Ø 125 mm	1/50/100	pc

Diamond grinding disc



- for dry use
- allows for even smoothing and levelling of surfaces
- the holes in the disc body provide cooling and better waste removal
- proper disc balancing ensures high working comfort and reduces tool load
- long product life helps reduce costs associated with purchasing additional discs

S062733012	Ø 125 mm	1/25	pc

Diamond grinding disc



- for dry use
- allows for even smoothing and levelling of surfaces
- the holes in the disc body provide cooling and better waste removal
- proper disc balancing ensures high working comfort and reduces tool load
- long product life helps reduce costs associated with purchasing additional discs

S062733111	Ø 100 mm	1/25	pc
S062733112	Ø 125 mm	1/25	pc
S062733118	Ø 180 mm	1/10	pc

Diamond grinding disc



- for dry use
- allows for even smoothing and levelling of surfaces
- the holes in the disc body provide cooling and better waste removal
- proper disc balancing ensures high working comfort and reduces tool load
- long product life helps reduce costs associated with purchasing additional discs

S062733212	Ø 125 mm	1/25	pc

Circular saw for aluminum



- made of cemented carbide
- reduction Ø 20, Ø 16 mm

S-34020	Ø 200 x 30 x 2,2 mm ; 60z ; red. Ø 16, Ø 20 mm ; max 7600 rpm	1/50	pc
S-34025	Ø 200 x 30 x 2,2 mm ; 80z ; red. Ø 16, Ø 20 mm ; max 7600 rpm	1/50	pc

Circular saw for wood



- made of cemented carbide

S-34113	Ø 130 x 20 x 2,2 mm ; 16 t ; red. Ø 16 mm ; max 11700 rpm	1/100	pc
S-34114	Ø 165 x 20 x 1.6 mm ; 24 t ; max 9000 rpm ; for use with cordless saws	1/25	pc
S-34116	Ø 160 x 20 x 2,4 mm ; 24 t ; red. Ø 16mm ; max 9500 rpm	1/50	pc
S-34117	Ø 165 x 20 x 1.6 mm ; 48 t ; max 9000 rpm ; for use with cordless saws	1/25	pc
S-34118	Ø 185 x 20 x 2,5 mm ; 24 t ; red. Ø 16 mm ; max 8200 rpm	1/25	pc
S-34120	Ø 200 x 30 x 2,4 mm ; 24 t ; red .Ø 16, Ø 20 mm ; max 7600 rpm	1/50	pc
S-34125	Ø 250 x 30 x 2,8 mm ; 30 t ; red. Ø 16, Ø 20 mm ; max 6100rpm	1/25	pc
S-34130	Ø 300 x 30 x 3,0 mm ; 40 t ; red. Ø 16, Ø 20 mm ; max 5000 rpm	1/10	pc
S-34135	Ø 350 x 30 x 3,2 mm ; 40 t ; red. Ø 16, Ø 20 mm ; max 4300 rpm	1/10	pc
S-34140	Ø 400 x 30 x 3,2 mm ; 48 t ; red. Ø 16, Ø 20 mm ; max 3800 rpm	1/10	pc
S-34213	Ø 130 x 20 x 2,2 mm ; 30 t ; red. Ø 16 mm ; max 11700 rpm	1/100	pc
S-34216	Ø 160x20x2,4mm ; 36 t ; red.Ø 16 mm ; max 9500 rpm	1/50	pc
S-34220	Ø 200 x 30 x 2,4 mm ; 40 t ; red. Ø 16, Ø 20 mm ; max 7600 rpm	1/50	pc
S-34225	Ø 250 x 30 x 2,8 mm ; 48 t ; red. Ø 16, Ø 20 mm ; max 6100 rpm	1/25	pc
S-34230	Ø 300 x 30 x 3,0 mm ; 60 t ; red. Ø 16, Ø 20 mm ; max 5000 rpm	1/10	pc
S-34235	Ø 350 x 30 x 3,2 mm ; 60 t ; red. Ø 16, Ø 20 mm ; max 4300 rpm	1/10	pc

Grinding disc for metal



S-61115	Ø 115 mm	1/5/25/100	pc
S-61125	Ø 125 mm	1/5/25/100	pc
S-61180	Ø 180 mm	1/5/25/50	pc
S-61230	Ø 230 mm	1/5/25/50	pc

Metal cutting disc



- long service life
- high cutting comfort
- very good performance


S063259010	Ø 125 x 1,0 mm	1/50/500	pc

Flat cutting disc for metal



S-59015	Ø 115 mm	1/25/100/600	pc
S-59023	Ø 230 mm	1/10/50/100	pc
S-59025	Ø 125 mm	1/25/100/600	pc
S-59115	Ø 115 mm	1/25/50/400	pc
S-59125	Ø 125 mm	1/25/50/100	pc
S-59180	Ø 180 mm	1/10/50/100	pc
S-59215	Ø 115 mm	1/25/100/600	pc
S-59225	Ø 125 mm	1/25/100/200	pc
S-59230	Ø 230 mm	1/25/50	pc
S-59300	Ø 300 mm	1/5/25	pc
S-59350	Ø 350 mm	1/5/25	pc

Flap discs

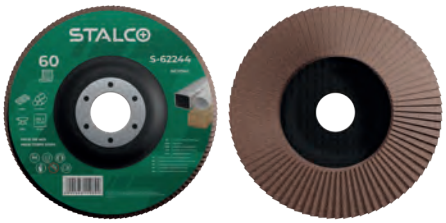

- for metal, aluminum, wood, plastics

S-62241	Ø 125 mm	5/200	pc
S-62244	Ø 125 mm	5/200	pc
S-62247	Ø 125 mm	5/200	pc
S-62250	Ø 125 mm	5/200	pc

Grinding wheels and brushes

Front brush



- steel wire

S-34324	Ø 60 mm	1/12/120	pc
S-34332	Ø 80 mm	1/8/64	pc
S-34340	Ø 100 mm	1/36	pc
S-34524	Ø 60 mm	1/100	pc
S-34532	Ø 80 mm	1/60	pc
S-34540	Ø 100 mm	1/36	pc

Front brush



- braided steel wire
- M14 thread

S-34724	Ø 60 mm	1/60	pc
S-34732	Ø 80 mm	1/24	pc
S-34740	Ø 100 mm	1/24	pc

Circular brush



- steel wire

S-34424	Ø 60 mm	1/15/270	pc
S-34432	Ø 75 mm	1/10/180	pc
S-34440	Ø 100 mm	1/15/120	pc
S-34640	Ø 100 mm	1/60	pc
S-34648	Ø 115 mm	1/42	pc

Circular brush



- braided steel wire
- M14 thread

S-34840	Ø 100 mm	1/60	pc

Abrasives

Perforated sanding disc



- Stalco perforated discs are an efficient product for sanding gypsum and finish coat surfaces.
- The disc perforation ensures effective dust extraction, improving both comfort and work results.
- Designed for use with drywall sanders, the popular “giraffe”-type machines.
- The discs make work easier thanks to quick hook-and-loop replacement.
- They ensure a smooth and even finish of sanded surfaces

S065136333	G40 ; 5 pcs	1/50	pack
S065136334	G60 ; 5 pcs	1/50	pack
S065136335	G80 ; 5 pcs	1/50	pack
S065136336	G100 ; 5 pcs	1/50	pack
S065136337	G120 ; 5 pcs	1/50	pack
S065136338	G150 ; 5 pcs	1/50	pack
S065136339	G180 ; 5 pcs	1/50	pack
S065136340	G220 ; 5 pcs	1/50	pack

Velcro sanding discs



- velcro fastening
- no holes
- for processing metal and wood

S-36301	Ø 125 mm, G24	1/2	100 pcs
S-36304	Ø 125 mm, G36	1/2	100 pcs
S-36305	Ø 125 mm, G40	1/2	100 pcs
S-36306	Ø 125 mm, G60	1/2	100 pcs
S-36307	Ø 125 mm, G80	1/2	100 pcs
S-36308	Ø 125 mm, G100	1/2	100 pcs
S-36309	Ø 125 mm, G120	1/2	100 pcs
S-36310	Ø 125 mm, G150	1/2	100 pcs
S-36311	Ø 125 mm, G180	1/2	100 pcs
S-36312	Ø 125 mm, G220	1/2	100 pcs
S-36313	Ø 125 mm, G240	1/2	100 pcs

Abrasive cloth in sheets



- 230 x 280 mm sheets
- for processing metal and wood

S-36324	230 x 280 mm	1/2	100 pcs
S-36325	230 x 280 mm	1/2	100 pcs
S-36326	230 x 280 mm	1/2	100 pcs
S-36327	230 x 280 mm	1/2	100 pcs
S-36328	230 x 280 mm	1/2	100 pcs
S-36329	230 x 280 mm	1/2	100 pcs
S-36330	230 x 280 mm	1/2	100 pcs
S-36331	230 x 280 mm	1/2	100 pcs
S-36332	230 x 280 mm	1/2	100 pcs

Abrasive gauze



S-36040	105 x 280 mm, G40	50	pc
S-36060	105 x 280 mm, G60	50	pc
S-36080	105 x 280 mm, G80	50	pc
S-36100	105 x 280 mm, G100	50	pc
S-36120	105 x 280 mm, G120	50	pc
S-36150	105 x 280 mm, G150	50	pc
S-36180	105 x 280 mm, G180	50	pc
S-36220	105 x 280 mm, G220	50	pc
S-36240	105 x 280 mm, G240	50	pc

Sanding sheets in rollls



- 115 mm x 50 m roll on 140 g/m² paper backing
- for processing wood, metal, paint, varnish, gypsum surfaces, etc.

S-36314	155 mm x 50 m, G40	1	roll
S-36315	155 mm x 50 m, G60	1	roll
S-36316	155 mm x 50 m, G80	1	roll
S-36317	155 mm x 50 m, G100	1	roll
S-36318	155 mm x 50 m, G120	1	roll
S-36319	155 mm x 50 m, G150	1	roll
S-36320	155 mm x 50 m, G180	1	roll
S-36321	155 mm x 50 m, G220	1	roll
S-36322	155 mm x 50 m, G240	1	roll

Grindstones



- pin with a diameter of 6mm

S-35105	5 el.	1/12/120	set

Whetstone



- fine-grained

S-36230	230 mm	1/50/100	pc

Saw blades and milling cutters

Jig saw blades - wood



- blades made of HSC steel
- ground teeth
- T handle

S-27921	2.0 x 50 mm	1/50/250	set
S-27922	2.5 x 75 mm	1/50/250	set
S-27923	3.0 x 75 mm	1/50/250	set
S-27924	4.0 x 126 mm	1/50/250	set
S-27925	2.5 x 75 mm	1/50/250	set

Jig saw blades - metal



- blades made of HSS steel
- ground teeth
- T handle

S-27941	1.2 x 51 mm	1/50/250	set
S-27942	2.0 x 51 mm	1/50/250	set

Jig saw blades - wood



- blades made of HCS steel
- ground teeth
- U handle

S-27931	2.0 x 52	1/50/250	set
S-27932	3.0 x 74 mm	1/50/250	set
S-27933	2.5 x 82 mm	1/50/250	set

Jig saw blades - metal



- blades made of HSS steel
- ground teeth
- U handle

S-27951	1.2 x 52 mm	1/50/250	set
S-27952	2.0 x 52 mm	1/50/250	set

Jig saw blades - universal



- blades are made of combined HSS and HCS steel
- can be used both for wood and metal
- ground teeth
- T handle

S-27961	3.0 x 75 mm	1/50/250	set

Jig saw blades - universal



- blades are made of combined HSS and HCS steel
- can be used both for wood and metal
- ground teeth
- U handle

S-27971	3.0 x 74 mm	1/50/250	set

Accessories for machines

Drill chuck



- braided steel wire
- thread M14

S-35111	3/8”	1/5/50	pc
S-35113	1/2”	1/5/40	pc
S-35115	1/2”	1/5/40	pc

Chuck key 13 mm



- braided steel wire
- thread M14

S-35116	13 mm	1/20/100	pc

Chuck adapter sds plus



- for head 1/2”

S-28140	65 mm	1/50	pc

Sanding disc for an angle grinder



- M14 thread

S-35112	Ø 125 mm	1/100	pc
S-35012	Ø 125 mm ; pin Ø 8 mm	1/100	pc
S-35120	Ø 125 mm ; thread M14 ; adapter Ø 9 mm	1/100	pc

Multi disc + adapter



- M14 thread
- adapter pin diameter: 9 mm

S-35125	Ø 125 mm	1/100	pc
S-35123	Ø 125 mm	1/100	pc

Fibra disc



- M14 thread

S-35127	Ø 125 mm	1/100	pc

Polishing disc




- M14 thread
- felt backing

S-35129	Ø 125 mm	1/100	pc
S-35131	Ø 125 mm	1/50	pc

Stirrers

Paint mixer

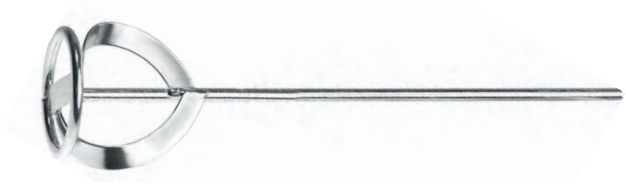

- galvanized steel
- Ø 55 mm - rod Ø 6 mm
- Ø 80, 100 mm - hexagonal bar 7 mm

S-37922	Ø 60 mm	1/50	pc
S-37932	Ø 80 mm	1/50	pc
S-37940	Ø 100 mm	1/50	pc

Mortar stirrer



- galvanized steel
- Ø 55 mm - rod Ø 6 mm
- Ø 80, 100 mm - hexagonal bar 7 mm

S-37952	Ø 55 mm	1/50	pc
S-37962	Ø 80 mm	1/50	pc
S-37972	Ø 100 mm	1/50	pc

STALCO
PERFECT



POWER TOOL
ACCESSORIES

Bits

1/4” Flat bit bit



- made of S2 steel with high hardness
- high-precision tips
- firm and secure seating in the screw socket

S-66115	SL 1.0 x 5.5 x 25 mm	10/240/720	pc
S-66117	SL 1.2 x 6.5 x 25 mm	10/240/720	pc
S-66121	SL 0.6 x 4.5 x 25 mm	10/240/720	pc
S-66123	SL 0.8 x 5.0 x 25 mm	10/240/720	pc

1/4” Bit - blister



- made of S2 steel with increased hardness
- very precisely made tips
- firm and secure seating in the screw socket

S-66382	FL 1.0 x 6.0 x 25 mm	1/30	set
S-66384	FL 1.2 x 6.5 x 25 mm	1/30	set
S-66386	FL 0.6 x 4.5 x 25 mm	1/30	set
S-66388	FL 0.8 x 5.0 x 25 mm	1/30	set

1/4” Philips head bit



- made of S2 steel with high hardness
- high-precision tips
- firm and secure seating in the screw socket

S-66101	PH1 ; 25 mm	20/480/1440	pc
S-66102	PH2 ; 25 mm	20/480/1440	pc
S-66103	PH3 ; 25 mm	20/480/1440	pc

1/4” Bit - blister



- made of S2 steel with increased hardness
- very precisely made tips
- firm and secure seating in the screw socket

S-66341	PH1 ; 25 mm	1/30	set
S-66343	PH2 ; 25 mm	1/30	set
S-66345	PH3 ; 25 mm	1/30	set

1/4” Philips head bit



- made of S2 steel with high hardness
- high-precision tips
- firm and secure seating in the screw socket

S-66111	PH1 ; 50 mm	10/240/720	pc
S-66112	PH2 ; 50 mm	10/240/720	pc
S-66113	PH3 ; 50 mm	10/240/720	pc

1/4” Bit - blister



- made of S2 steel with increased hardness
- very precisely made tips
- firm and secure seating in the screw socket

S-66348	PH1 ; 50 mm	1/30	set
S-66350	PH2 ; 50 mm	1/30	set
S-66352	PH3 ; 50 mm	1/30	set

1/4” Philips titanium head bit



- Ti coating
- made of S2 steel with high hardness
- high-precision tips
- firm and secure seating in the screw socket

S-66301	PH1 ; 25 mm	10/240/720	pc
S-66302	PH2 ; 25 mm	10/240/720	pc
S-66303	PH3 ; 25 mm	10/240/720	pc

1/4” Bit - blister



- Ti coating
- made of S2 steel with increased hardness
- very precisely made tips
- firm and secure seating in the screw socket

S-66391	PH1 ; 25 mm	1/30	set
S-66393	PH2 ; 25 mm	1/30	set
S-66395	PH3 ; 25 mm	1/30	set

1/4” Pozidriv head bit



- made of S2 steel with high hardness
- high-precision tips
- firm and secure seating in the screw socket

S-66201	PZ1 ; 25 mm	20/480/1440	pc
S-66202	PZ2 ; 25 mm	20/480/1440	pc
S-66203	PZ3 ; 25 mm	20/480/1440	pc

1/4” Pozidriv titanium head bit



- Ti coating
- made of S2 steel with high hardness
- high-precision tips
- firm and secure seating in the screw socket

S-66311	PZ1 ; 25 mm	10/240/720	pc
S-66312	PZ2 ; 25 mm	10/240/720	pc
S-66313	PZ3 ; 25 mm	10/240/720	pc

1/4” Bit - blister



- made of S2 steel with increased hardness
- very precisely made tips
- firm and secure seating in the screw socket

S-66355	PZ1 ; 25 mm	1/30	set
S-66357	PZ2 ; 25 mm	1/30	set
S-66359	PZ3 ; 25 mm	1/30	set

1/4” Bit - blister



- Ti coating
- made of S2 steel with increased hardness
- very precisely made tips
- firm and secure seating in the screw socket

S-66398	PZ1 ; 25 mm	1/30	set
S-66400	PZ2 ; 25 mm	1/30	set
S-66402	PZ3 ; 25 mm	1/30	set

1/4” Pozidriv head bit



- made of S2 steel with high hardness
- high-precision tips
- firm and secure seating in the screw socket

S-66211	PZ1 ; 50 mm	10/240/720	pc
S-66212	PZ2 ; 50 mm	10/240/720	pc
S-66213	PZ3 ; 50 mm	10/240/720	pc

1/4” Torx head bit



- made of S2 steel with high hardness
- high-precision tips
- firm and secure seating in the screw socket

S-66129	T10 ; 25 mm	10/240/720	pc
S-66131	T15 ; 25 mm	10/240/720	pc
S-66133	T20 ; 25 mm	10/240/720	pc
S-66135	T25 ; 25 mm	10/240/720	pc
S-66137	T30 ; 25 mm	10/240/720	pc
S-66139	T40 ; 25 mm	10/240/720	pc

1/4” Bit - blister



- made of S2 steel with increased hardness
- very precisely made tips
- firm and secure seating in the screw socket

S-66362	PZ1 ; 50 mm	1/30	set
S-66364	PZ2 ; 50 mm	1/30	set
S-66366	PZ3 ; 50 mm	1/30	set

1/4” Bit - blister



- made of S2 steel with increased hardness
- very precisely made tips
- firm and secure seating in the screw socket

S-66369	T10 ; 25 mm	1/30	set
S-66371	T15 ; 25 mm	1/30	set
S-66373	T20 ; 25 mm	1/30	set
S-66375	T25 ; 25 mm	1/30	set
S-66377	T30 ; 25 mm	1/30	set
S-66379	T40 ; 25 mm	1/30	set

1/4” Torx titanium head bit



- Ti coating
- made of S2 steel with high hardness
- high-precision tips
- firm and secure seating in the screw socket

S-66317	T15 ; 25 mm	10/240/720	pc
S-66319	T20 ; 25 mm	10/240/720	pc
S-66321	T25 ; 25 mm	10/240/720	pc
S-66323	T30 ; 25 mm	10/240/720	pc
S-66325	T40 ; 25 mm	10/240/720	pc

1/4” Bit - blister



- Ti coating
- made of S2 steel with increased hardness
- very precisely made tips
- firm and secure seating in the screw socket

S-66405	T15 ; 25 mm	1/30	set
S-66407	T20 ; 25 mm	1/30	set
S-66409	T25 ; 25 mm	1/30	set
S-66411	T30 ; 25 mm	1/30	set
S-66413	T40 ; 25 mm	1/30	set

1/4” Bit set



- steel S2
- Phillips bits Ph1, Ph2, Ph3
- Pozidriv bits Pz1, Pz2, Pz3
- Torx bits 8, 9, 10, 15, 20, 25, 27, 30, 40
- Flat bits: 3.5, 4.5, 5, 5.5, 6.5, 8
- Hex bits 2, 3, 4, 5, 6, 8
- bits S 1, 2, 3
- quick-fix tip 60mm for bits 1/4”
- durable case with a wide swivel clip 360°

S-66231	-	1/6/24	pc

1/4” Magnetic bit holder



- strong magnet
- quick release system

S-66331	75 mm	1/50/100	pc

Drills

Metal drill HSS



- twist drill of high speed steel HSS in accordance with DIN 338
- cylindrical handle
- special coating that provides a low friction coefficient and extends the life of the drill
- perfectly polished edge ensures even faster and more accurate drilling
- ground spiral provides high accuracy and quick removal of excavated material
- the 2-step polished tip at an angle of 135° allows for drilling without scoring

S-71700	Ø 0,8 x 30 mm	10 mm	10/500	pc
S-71701	Ø 1 x 34 mm	12 mm	10/500	pc
S-71702	Ø 1,1 x 36 mm	14 mm	10/500	pc
S-71712	Ø 1,2 x 38 mm	16 mm	10/500	pc
S-71703	Ø 1,3 x 38 mm	16 mm	10/500	pc
S-71714	Ø 1,4 x 40 mm	18 mm	10/500	pc
S-71715	Ø 1,5 x 40 mm	18 mm	10/500	pc
S-71716	Ø 1,6 x 43 mm	20 mm	10/500	pc
S-71717	Ø 1,7 x 43 mm	20 mm	10/500	pc
S-71718	Ø 1,9 x 46 mm	22 mm	10/500	pc
S-71704	Ø 2 x 46 mm	22 mm	10/500	pc
S-71720	Ø 1,8 x 49 mm	24 mm	10/500	pc
S-71705	Ø 2,1 x 49 mm	24 mm	10/500	pc
S-71722	Ø 2,2 x 53 mm	27 mm	10/500	pc
S-71723	Ø 2,3 x 53 mm	27 mm	10/500	pc
S-71706	Ø 2,4 x 57 mm	30 mm	10/500	pc
S-71707	Ø 2,5 x 57 mm	30 mm	10/500	pc
S-71726	Ø 2,6 x 57 mm	30 mm	10/500	pc
S-71833	Ø 2,7 x 61 mm	33 mm	10/500	pc
S-71728	Ø 2,8 x 61 mm	33 mm	10/500	pc
S-71729	Ø 2,9 x 61 mm	33 mm	10/500	pc
S-71730	Ø 3 x 61 mm	33 mm	10/500	pc
S-71835	Ø 3,1 x 65 mm	36 mm	10/500	pc
S-71732	Ø 3,2 x 65 mm	36 mm	10/500	pc
S-71837	Ø 3,3 x 65 mm	36 mm	10/500	pc
S-71734	Ø 3,4 x 70 mm	39 mm	10/500	pc
S-71735	Ø 3,5 x 70 mm	39 mm	10/500	pc
S-71736	Ø 3,6 x 70 mm	39 mm	10/500	pc
S-71737	Ø 3,7 x 70 mm	39 mm	10/500	pc
S-71738	Ø 3,8 x 75 mm	43 mm	10/500	pc
S-71739	Ø 3,9 x 75 mm	43 mm	10/500	pc
S-71740	Ø 4 x 75 mm	43 mm	10/500	pc
S-71741	Ø 4,1 x 75 mm	43 mm	10/500	pc
S-71742	Ø 4,2 x 75 mm	43 mm	10/500	pc
S-71743	Ø 4,3 x 80 mm	47 mm	10/500	pc
S-71744	Ø 4,4 x 80 mm	47 mm	10/500	pc
S-71745	Ø 4,5 x 80 mm	47 mm	10/500	pc
S-71746	Ø 4,6 x 80 mm	47 mm	10/500	pc
S-71747	Ø 4,7 x 80 mm	47 mm	10/500	pc
S-71748	Ø 4,8 x 86 mm	52 mm	10/500	pc
S-71749	Ø 4,9 x 86 mm	52 mm	10/500	pc
S-71750	Ø 5 x 86 mm	52 mm	10/500	pc
S-71751	Ø 5,1 x 86 mm	52 mm	10/500	pc
S-71752	Ø 5,2 x 86 mm	52 mm	10/500	pc
S-71753	Ø 5,3 x 86 mm	52 mm	10/500	pc
S-71754	Ø 5,4 x 93 mm	57 mm	10/500	pc
S-71755	Ø 5,5 x 93 mm	57 mm	10/500	pc
S-71756	Ø 5,6 x 93 mm	57 mm	10/500	pc
S-71757	Ø 5,7 x 93 mm	57 mm	10/500	pc
S-71758	Ø 5,8 x 93 mm	57 mm	10/500	pc
S-71759	Ø 5,9 x 93 mm	57 mm	10/500	pc
S-71760	Ø 6 x 93 mm	57 mm	10/500	pc
S-71761	Ø 6,1 x 101 mm	63 mm	10/500	pc

S-71762	Ø 6,2 x 101 mm	63 mm	10/500	pc
S-71763	Ø 6,4 x 101 mm	63 mm	10/500	pc
S-71764	Ø 6,3 x 101 mm	63 mm	10/500	pc
S-71765	Ø 6,5 x 101 mm	63 mm	10/500	pc
S-71766	Ø 6,6 x 101 mm	63 mm	10/500	pc
S-71767	Ø 6,7 x 101 mm	63 mm	10/500	pc
S-71768	Ø 6,8 x 109 mm	69 mm	10/500	pc
S-71769	Ø 6,9 x 109 mm	69 mm	10/500	pc
S-71770	Ø 7 x 109 mm	69 mm	10/500	pc
S-71771	Ø 7,1 x 109 mm	69 mm	5/100	pc
S-71772	Ø 7,2 x 109 mm	69 mm	5/100	pc
S-71773	Ø 7,3 x 109 mm	69 mm	5/100	pc
S-71774	Ø 7,4 x 109 mm	69 mm	5/100	pc
S-71775	Ø 7,5 x 109 mm	69 mm	5/100	pc
S-71776	Ø 7,6 x 117 mm	75 mm	5/100	pc
S-71777	Ø 7,7 x 117 mm	75 mm	5/100	pc
S-71778	Ø 7,8 x 117 mm	75 mm	5/100	pc
S-71779	Ø 7,9 x 117 mm	75 mm	5/100	pc
S-71780	Ø 8 x 117 mm	75 mm	5/100	pc
S-71781	Ø 8,1 x 117 mm	75 mm	5/100	pc
S-71782	Ø 8,2 x 117 mm	75 mm	5/100	pc
S-71783	Ø 8,3 x 117 mm	75 mm	5/100	pc
S-71784	Ø 8,4 x 117 mm	75 mm	5/100	pc
S-71785	Ø 8,5 x 117 mm	75 mm	5/100	pc
S-71786	Ø 8,6 x 125 mm	81 mm	5/100	pc
S-71787	Ø 8,7 x 125 mm	81 mm	5/100	pc
S-71788	Ø 8,8 x 125 mm	81 mm	5/100	pc
S-71789	Ø 8,9 x 125 mm	81 mm	5/100	pc
S-71790	Ø 9 x 125 mm	81 mm	5/100	pc
S-71791	Ø 9,1 x 125 mm	81 mm	5/100	pc
S-71792	Ø 9,2 x 125 mm	81 mm	5/100	pc
S-71793	Ø 9,3 x 125 mm	81 mm	5/100	pc
S-71794	Ø 9,4 x 125 mm	81 mm	5/100	pc
S-71795	Ø 9,5 x 125 mm	81 mm	5/100	pc
S-71796	Ø 9,6 x 133 mm	87 mm	5/100	pc
S-71797	Ø 9,7 x 133 mm	87 mm	5/100	pc
S-71798	Ø 9,8 x 133 mm	87 mm	5/100	pc
S-71799	Ø 9,9 x 133 mm	87 mm	5/100	pc
S-71800	Ø 10 x 133 mm	87 mm	5/100	pc
S-71802	Ø 10,2 x 133 mm	87 mm	5/100	pc
S-71805	Ø 10,5 x 133 mm	87 mm	5/100	pc
S-71811	Ø 11 x 142 mm	94 mm	5/100	pc
S-71815	Ø 11,5 x 142 mm	94 mm	5/100	pc
S-71812	Ø 12 x 151 mm	101 mm	5/100	pc
S-71825	Ø 12,5 x 151 mm	101 mm	5/100	pc
S-71830	Ø 13 x 151 mm	101 mm	5/100	pc

Metal drills HSS



- long twist drill of high speed steel HSS in accordance with DIN 338
- cylindrical handle
- special coating that provides a low friction coefficient and extends the life of the drill
- perfectly polished edge ensures even faster and more accurate drilling
- ground spiral provides high accuracy and quick removal of excavated material
- the 2-step polished tip at an angle of 135° allows for drilling without scoring
- plastic container for storage and transport
- Ø 1.5; 2.0; 2.5; 3.0; 3.2; 3.5; 4.0; 4.5; 4.8; 5.0; 5.5; 6.0; 6.5 mm

S-71836	Ø 1.5 / 6.5 mm	1/20/80	set

Metal drills HSS



- long twist drill of high speed steel HSS in accordance with DIN 338
- cylindrical handle
- special coating that provides a low friction coefficient and extends the life of the drill
- perfectly polished edge ensures even faster and more accurate drilling
- ground spiral provides high accuracy and quick removal of excavated material
- the 2-step polished tip at an angle of 135° allows for drilling without scoring
- plastic container for storage and transport
- Ø 1,0 ; 1,5 ; 2,0 ; 2,5 ; 3,0 ; 3,5 ; 4,0 ; 4,5 ; 5,0 ; 5,5 ; 6,0 ; 6,5 ; 7,0 ; 7,5 ; 8,0 ; 8,5 ; 9,0 ; 9,5 ; 10,0 mm

S-71839	Ø 1.0 / 10.0 mm	1/10/40	set

Metal drill HSS - blister



- HSS twist drill bit according to DIN 338
- cylindrical handle
- special coating ensuring low friction coefficient and extending drill bit life
- perfectly ground edge guarantees even faster and accurate drilling
- ground spiral ensures high accuracy and instant removal of material
- the tip is ground in two steps at an angle of 135°, which allows drilling without scoring

S-72049	Ø 1 x 34 mm ; 3 pcs	12 mm	1/85	pack
S-72050	Ø 1,1 x 36 mm ; 3 pcs	14 mm	1/80	pack
S-72051	Ø 1,2 x 38 mm ; 3 pcs	16 mm	1/80	pack
S-72052	Ø 1,3 x 38 mm ; 3 pcs	16 mm	1/80	pack
S-72053	Ø 1,4 x 40 mm ; 3 pcs	18 mm	1/80	pack
S-72054	Ø 1,5 x 40 mm ; 3 pcs	18 mm	1/70	pack
S-72055	Ø 1,6 x 43 mm ; 3 pcs	20 mm	1/70	pack
S-72056	Ø 1,7 x 43 mm ; 3 pcs	20 mm	1/70	pack
S-72057	Ø 1,8 x 46 mm ; 3 pcs	22 mm	1/60	pack
S-72058	Ø 1,9 x 46 mm ; 3 pcs	22 mm	1/60	pack
S-72059	Ø 2 x 49 mm ; 3 pcs	24 mm	1/60	pack
S-72060	Ø 2,1 x 49 mm ; 3 pcs	24 mm	1/60	pack
S-72061	Ø 2,2 x 53 mm ; 3 pcs	27 mm	1/60	pack
S-72062	Ø 2,3 x 53 mm ; 3 pcs	27 mm	1/60	pack
S-72063	Ø 2,4 x 57 mm ; 3 pcs	30 mm	1/60	pack
S-72064	Ø 2,5 x 57 mm ; 3 pcs	30 mm	1/60	pack
S-72065	Ø 2,6 x 57 mm ; 3 pcs	30 mm	1/60	pack
S-72066	Ø 2,7 x 61 mm ; 3 pcs	33 mm	1/50	pack
S-72067	Ø 2,8 x 61 mm ; 3 pcs	33 mm	1/50	pack
S-72068	Ø 2,9 x 61 mm ; 3 pcs	33 mm	1/50	pack
S-72069	Ø 3 x 61 mm ; 2 pcs	33 mm	1/50	pack
S-72070	Ø 3,1 x 65 mm ; 2 pcs	36 mm	1/50	pack
S-72071	Ø 3,2 x 65 mm ; 2 pcs	36 mm	1/50	pack
S-72072	Ø 3,3 x 65 mm ; 2 pcs	36 mm	1/50	pack
S-72073	Ø 3,4 x 70 mm ; 2 pcs	39 mm	1/50	pack
S-72074	Ø 3,5 x 70 mm ; 2 pcs	39 mm	1/50	pack
S-72075	Ø 3,6 x 70 mm ; 2 pcs	39 mm	1/50	pack
S-72076	Ø 3,7 x 70 mm ; 2 pcs	39 mm	1/50	pack

S-72077	Ø 3,8 x 75 mm ; 2 pcs	43 mm	1/50	pack
S-72078	Ø 3,9 x 75 mm ; 2 pcs	43 mm	1/50	pack
S-72079	Ø 4 x 75 mm	43 mm	1/50	pack
S-72080	Ø 4,1 x 75 mm	43 mm	1/50	pack
S-72081	Ø 4,2 x 75 mm	43 mm	1/50	pack
S-72082	Ø 4,3 x 80 mm	47 mm	1/50	pack
S-72083	Ø 4,4 x 80 mm	47 mm	1/50	pack
S-72084	Ø 4,5 x 80 mm	47 mm	1/50	pack
S-72085	Ø 4,6 x 80 mm	47 mm	1/50	pack
S-72086	Ø 4,7 x 80 mm	47 mm	1/40	pack
S-72087	Ø 4,8 x 86 mm	52 mm	1/40	pack
S-72088	Ø 4,9 x 86 mm	52 mm	1/40	pack
S-72089	Ø 5 x 86 mm	52 mm	1/40	pack
S-72090	Ø 5,1 x 86 mm	52 mm	1/40	pack
S-72091	Ø 5,2 x 86 mm	52 mm	1/40	pack
S-72092	Ø 5,3 x 86 mm	52 mm	1/40	pack
S-72093	Ø 5,4 x 93 mm	57 mm	1/40	pack
S-72094	Ø 5,5 x 93 mm	57 mm	1/40	pack
S-72095	Ø 5,6 x 93 mm	57 mm	1/40	pack
S-72096	Ø 5,7 x 93 mm	57 mm	1/40	pack
S-72097	Ø 5,8 x 93 mm	57 mm	1/40	pack
S-72098	Ø 5,9 x 93 mm	57 mm	1/40	pack
S-72099	Ø 6 x 93 mm	57 mm	1/40	pack
S-72100	Ø 6,1 x 101 mm	63 mm	1/40	pack
S-72101	Ø 6,2 x 101 mm	63 mm	1/40	pack
S-72102	Ø 6,3 x 101 mm	63 mm	1/40	pack
S-72103	Ø 6,4 x 101 mm	63 mm	1/40	pack
S-72104	Ø 6,5 x 101 mm	63 mm	1/40	pack
S-72105	Ø 6,6 x 101 mm	63 mm	1/40	pack
S-72106	Ø 6,7 x 101 mm	63 mm	1/40	pack
S-72107	Ø 6,8 x 109 mm	69 mm	1/40	pack
S-72108	Ø 6,9 x 109 mm	69 mm	1/40	pack
S-72109	Ø 7 x 109 mm	69 mm	1/35	pack
S-72110	Ø 7,1 x 109 mm	69 mm	1/35	pack
S-72111	Ø 7,2 x 109 mm	69 mm	1/35	pack
S-72112	Ø 7,3 x 109 mm	69 mm	1/35	pack
S-72113	Ø 7,4 x 109 mm	69 mm	1/35	pack
S-72114	Ø 7,5 x 109 mm	69 mm	1/35	pack
S-72115	Ø 7,6 x 117 mm	75 mm	1/30	pack
S-72116	Ø 7,7 x 117 mm	75 mm	1/30	pack
S-72117	Ø 7,8 x 117 mm	75 mm	1/30	pack
S-72118	Ø 7,9 x 117 mm	75 mm	1/30	pack
S-72119	Ø 8 x 117 mm	75 mm	1/30	pack
S-72120	Ø 8,1 x 117 mm	75 mm	1/30	pack
S-72121	Ø 8,2 x 117 mm	75 mm	1/30	pack
S-72122	Ø 8,3 x 117 mm	75 mm	1/30	pack
S-72123	Ø 8,4 x 117 mm	75 mm	1/30	pack
S-72124	Ø 8,5 x 117 mm	75 mm	1/30	pack
S-72125	Ø 8,6 x 125 mm	81 mm	1/25	pack
S-72126	Ø 8,7 x 125 mm	81 mm	1/25	pack
S-72127	Ø 8,8 x 125 mm	81 mm	1/25	pack
S-72128	Ø 8,9 x 125 mm	81 mm	1/25	pack
S-72129	Ø 9 x 125 mm	81 mm	1/25	pack
S-72130	Ø 9,1 x 125 mm	81 mm	1/25	pack
S-72131	Ø 9,2 x 125 mm	81 mm	1/25	pack
S-72132	Ø 9,3 x 125 mm	81 mm	1/25	pack
S-72133	Ø 9,4 x 125 mm	81 mm	1/25	pack
S-72134	Ø 9,5 x 125 mm	81 mm	1/25	pack
S-72135	Ø 9,6 x 133 mm	87 mm	1/25	pack
S-72136	Ø 9,7 x 133 mm	87 mm	1/25	pack
S-72137	Ø 9,8 x 133 mm	87 mm	1/25	pack
S-72138	Ø 9,9 x 133 mm	87 mm	1/25	pack
S-72139	Ø 10 x 133 mm	87 mm	1/25	pack
S-72140	Ø 10,2 x 133 mm	87 mm	1/25	pack
S-72141	Ø 10,5 x 133 mm	87 mm	1/25	pack
S-72142	Ø 11 x 142 mm	94 mm	1/20	pack
S-72143	Ø 11,5 x 142 mm	94 mm	1/20	pack
S-72144	Ø 12 x 151 mm	101 mm	1/20	pack
S-72145	Ø 12,5 x 151 mm	101 mm	1/20	pack
S-72146	Ø 13 x 151 mm	101 mm	1/20	pack

Drill HSS bit with reduced shank



- twist drill of high speed steel HSS in accordance with DIN 338
- reduced shank
- special coating that provides a low friction coefficient and extends the life of the drill
- perfectly polished edge ensures even faster and more accurate drilling
- ground spiral provides high accuracy and quick removal of excavated material
- the 2-step polished tip at an angle of 135° allows for drilling without scoring

S-71843	Ø 14 x 160 mm	108 mm	1/21/84	pc
S-71838	Ø 14,5 x 169 mm	114 mm	1/21/84	pc
S-71845	Ø 15 x 169 mm	114 mm	1/21/84	pc
S-71840	Ø 15,5 x 178 mm	120 mm	1/21/84	pc
S-71847	Ø 16 x 178 mm	120 mm	1/21/84	pc
S-71842	Ø 16,5 x 178 mm	120 mm	1/21/84	pc
S-71844	Ø 17 x 178 mm	120 mm	1/21/84	pc
S-71846	Ø 17,5 x 191 mm	130 mm	1/21/84	pc
S-71849	Ø 18 x 191 mm	130 mm	1/21/84	pc
S-71848	Ø 18,5 x 198 mm	135 mm	1/21/84	pc
S-71850	Ø 19 x 198 mm	135 mm	1/21/84	pc
S-71852	Ø 19,5 x 205 mm	140 mm	1/21/84	pc
S-71851	Ø 20 x 205 mm	140 mm	1/12/48	pc

Metal drill HSS long



- long twist drill of high speed steel HSS in accordance with DIN 338
- cylindrical handle
- special coating that provides a low friction coefficient and extends the life of the drill
- perfectly polished edge ensures even faster and more accurate drilling
- ground spiral provides high accuracy and quick removal of excavated material
- the 2-step polished tip at an angle of 135° allows for drilling without scoring

S-71861	Ø 1 x 60 mm	37 mm	10/500	pc
S-71864	Ø 1,5 x 70 mm	45 mm	10/500	pc
S-71867	Ø 2 x 85 mm	56 mm	10/500	pc
S-71870	Ø 2,5 x 95 mm	62 mm	10/500	pc
S-71873	Ø 3 x 100 mm	66 mm	10/500	pc
S-71876	Ø 3,2 x 106 mm	69 mm	10/500	pc
S-71879	Ø 3,5 x 112 mm	73 mm	10/500	pc
S-71882	Ø 4 x 119 mm	78 mm	10/500	pc
S-71883	Ø 4,2 x 119 mm	78 mm	10/500	pc
S-71885	Ø 4,5 x 126 mm	82 mm	10/500	pc
S-71888	Ø 4,8 x 132 mm	87 mm	10/500	pc
S-71891	Ø 5 x 132 mm	87 mm	10/500	pc
S-71894	Ø 5,5 x 139 mm	91 mm	10/500	pc
S-71897	Ø 6 x 139 mm	91 mm	10/500	pc
S-71900	Ø 6,5 x 148 mm	97 mm	10/500	pc
S-71903	Ø 7 x 156 mm	102 mm	5/100	pc
S-71906	Ø 7,5 x 156 mm	102 mm	5/100	pc
S-71909	Ø 8 x 165 mm	109 mm	5/100	pc
S-71912	Ø 8,5 x 165 mm	109 mm	5/100	pc
S-71915	Ø 9 x 175 mm	115 mm	5/100	pc
S-71918	Ø 10 x 184 mm	121 mm	5/100	pc
S-71921	Ø 12 x 205 mm	134 mm	5/100	pc

Metal drill HSS long - blister



- HSS twist drill bit according to DIN 338
- cylindrical handle
- special coating ensuring low friction coefficient and extending drill bit life
- perfectly ground edge guarantees even faster and accurate drilling
- ground spiral ensures high accuracy and instant removal of material
- the tip is ground in 2 steps at an angle of 135°, which allows drilling without scoring

S-72147	Ø 1 x 56 mm	33 mm	1/80	pack
S-72148	Ø 1,5 x 70 mm	45 mm	1/60	pack
S-72149	Ø 2 x 85 mm	56 mm	1/60	pack
S-72150	Ø 2,5 x 95 mm	62 mm	1/50	pack
S-72151	Ø 3 x 100 mm	66 mm	1/50	pack
S-72152	Ø 3,2 x 106 mm	69 mm	1/45	pack
S-72153	Ø 3,5 x 112 mm	73 mm	1/45	pack
S-72154	Ø 4 x 119 mm	78 mm	1/45	pack
S-72155	Ø 4,2 x 119 mm	78 mm	1/50	pack
S-72156	Ø 4,5 x 126 mm	82 mm	1/50	pack
S-72157	Ø 4,8 x 132 mm	87 mm	1/40	pack
S-72158	Ø 5 x 132 mm	87 mm	1/40	pack
S-72159	Ø 5,5 x 139 mm	91 mm	1/40	pack
S-72160	Ø 6 x 139 mm	91 mm	1/35	pack
S-72161	Ø 6,5 x 148 mm	97 mm	1/35	pack
S-72162	Ø 7 x 156 mm	102 mm	1/40	pack
S-72163	Ø 7,5 x 156 mm	102 mm	1/45	pack
S-72164	Ø 8 x 165 mm	109 mm	1/45	pack
S-72165	Ø 8,5 x 165 mm	109 mm	1/35	pack
S-72166	Ø 9 x 175 mm	115 mm	1/40	pack
S-72167	Ø 10 x 184 mm	121 mm	1/25	pack
S-72168	Ø 12 x 205 mm	134 mm	1/25	pack

INOX HSS-E TiN metal drill bit



- cobalt high-speed steel HSS-E
- TiN coating
- reduces friction and increases surface hardness of the drill
- cylindrical handle
- DIN 338
- dedicated primarily to drilling in stainless steels
- good performance when drilling in cast iron and high-alloy steels
- long service life
- low noise during drilling
- point angle 135 degrees

S060172330	Ø 1.0 x 34 mm ; package 2 pcs.	12 mm	1/400/1600	pack
S060172332	Ø 1.5 x 40 mm ; package 2 pcs.	16 mm	1/400/1600	pack
S060172334	Ø 2.0 x 49 mm ; package 2 pcs.	24 mm	1/400/1600	pack
S060172336	Ø 2.5 x 57 mm ; package 2 pcs.	30 mm	1/400/1600	pack
S060172338	Ø 3.0 x 61 mm ; package 2 pcs.	33 mm	1/400/1600	pack
S060172340	Ø 3.2 x 65 mm ; package 2 pcs.	36 mm	1/400/1600	pack
S060172342	Ø 3.3 x 65 mm ; package 2 pcs.	36 mm	1/400/1600	pack
S060172344	Ø 3.5 x 70 mm ; package 2 pcs.	39 mm	1/400/1600	pack
S060172346	Ø 3.8 x 75 mm ; package 2 pcs.	43 mm	1/400/1600	pack
S060172348	Ø 4.0 x 75 mm ; package 2 pcs.	43 mm	1/400/1600	pack
S060172350	Ø 4.2 x 75 mm	43 mm	1/250/1000	pc
S060172352	Ø 4.5 x 80 mm	47 mm	1/250/1000	pc
S060172354	Ø 4.8 x 86 mm	52 mm	1/200/800	pc
S060172356	Ø 5.0 x 86 mm	52 mm	1/200/800	pc
S060172358	Ø 5.5 x 93 mm	57 mm	1/200/800	pc
S060172360	Ø 6.0 x 93 mm	57 mm	1/150/600	pc
S060172362	Ø 6.5 x 101 mm	63 mm	1/150/600	pc
S060172364	Ø 6.8 x 109 mm	69 mm	1/150/600	pc
S060172366	Ø 7.0 x 109 mm	69 mm	1/100/400	pc
S060172368	Ø 7.5 x 109 mm	69 mm	1/100/400	pc
S060172370	Ø 8.0 x 117 mm	75 mm	1/100/400	pc
S060172372	Ø 8.5 x 117 mm	75 mm	1/100/400	pc
S060172374	Ø 9.0 x 125 mm	81 mm	1/100/400	pc
S060172376	Ø 9.5 x 125 mm	81 mm	1/50/200	pc
S060172378	Ø 10.0 x 133 mm	87 mm	1/50/200	pc
S060172380	Ø 10.2 x 133 mm	87 mm	1/50/200	pc
S060172382	Ø 10.5 x 133 mm	87 mm	1/50/200	pc
S060172384	Ø 11.0 x 142 mm	94 mm	1/50/200	pc
S060172386	Ø 11.5 x 142 mm	94 mm	1/50/200	pc
S060172388	Ø 12.0 x 151 mm	101 mm	1/50/200	pc
S060172390	Ø 12.5 x 151 mm	101 mm	1/50/200	pc
S060172392	Ø 13.0 x 151 mm	101 mm	1/50/200	pc
S060172394	Ø 14.0 x 160 mm	108 mm	1/50/200	pc

HSS step drill bit



- HSS (High Speed Steel) - high alloy steel
- cylindrical handle
- ground spiral groove for optimum chip removal and reduced vibration
- laser-engraved dimensions
- maximum cutting smoothness thanks to axial and radial grinding
- cross-grinding of the tip allows easy starting, drilling without the need for a spike or pre-drilling

S-72520	drill bit Ø 4-12 mm ; stroke 1 mm ; handle Ø 6 mm	1	pc
S-72522	drill bit Ø 4-20 mm ; stroke 2 mm ; handle Ø 8 mm	1	pc
S-72524	drill bit Ø 6-30 mm ; stroke 2 mm ; handle Ø 10 mm	1	pc

3x HSS step drill bit set



- drill bit set S-72520. S-72522, S-72524

S-72526	drill ; impact ; chuck ; Ø 4-12 mm ; 1 mm ; Ø 6 mm ; Ø 4-20 mm ; 2 mm ; Ø 8 mm ; Ø 6-30 mm ; 2 mm ; Ø 10 mm	1	pc

HSS-TiN step drill bit



- TiN structural coating [titanium nitride coating].
- cylindrical handle
- ground spiral groove for optimum chip removal and reduced vibration
- laser-engraved dimensions
- maximum cutting smoothness thanks to axial and radial grinding
- cross-grinding of the tip allows easy starting, drilling without the need for a spike or pre-drilling

S-72528	drill bit Ø 4-12 mm ; stroke 1 mm ; handle Ø 6 mm	1	pc
S-72530	drill bit Ø 4-20 mm ; stroke 2 mm ; handle Ø 8 mm	1	pc
S-72532	drill bit Ø 6-30 mm ; stroke 2 mm ; handle Ø 10 mm	1	pc

3 x HSS-TiN step drill bit set



- drill bit set S-72528, S-72530. S-72532

S-72534	drill ; impact ; chuck ; Ø 4-12 mm ; 1 mm ; Ø 6 mm ; Ø 4-20 mm ; 2 mm ; Ø 8 mm ; Ø 6-30 mm ; 2 mm ; Ø 10 mm	1	pc

HSS dredging



- 3 blades
- cylindrical shaft
- right-wing
- vertex angle 90
- Ideal for countersinking and milling without burrs and vibrations
- best results at low cutting speed
- for machining steel, cast iron, light and non-ferrous metals

S-72501	recess Ø 6.3 mm ; length - 45 mm ; handle Ø 5 mm	1	pc
S-72503	hollow Ø 12.4 mm ; length - 56 mm ; handle Ø 8 mm	1	pc
S-72505	hollow Ø 20.5 mm ; length - 63 mm ; handle Ø 10 mm	1	pc

3 x HSS countersink set



- countersink set S-72501, S-72503, S-72505

S-72506	countersink ; chamfer ; handle ; Ø 6.3 mm ; 45 mm ; Ø 5 mm ; Ø 12.4 mm ; 56 mm ; Ø 8 mm ; Ø 20.5 mm ; 63 mm ; Ø 10 mm	1	pc

HSS-TiN countersinking



- 3 blades
- cylindrical shaft
- right-wing
- vertex angle 90
- Ideal for countersinking and milling without burrs and vibrations
- best results at low cutting speed
- for machining steel, cast iron, light and non-ferrous metals

S-72507	hollow Ø 6.3 mm ; length - 45 mm ; handle Ø 5 mm	1	pc
S-72509	hollow Ø 12.4 mm ; length - 56 mm ; handle Ø 8 mm	1	pc
S-72511	hollow Ø 20.5 mm ; length - 63 mm ; handle Ø 10 mm	1	pc

Set of 3 x HSS-tin countersinks



- countersink set S-72507, S-72509, S-72511

S-72512	countersink ; chamfer ; handle ; Ø 6.3 mm ; 45 mm ; Ø 5 mm ; Ø 12.4 mm ; 56 mm ; Ø 8 mm ; Ø 20.5 mm ; 63 mm ; Ø 10 mm	1	pc

SDS plus X5 DUAL drill bit



- designed for drilling in reinforced concrete
- unique DUAL spiral combination of four-fold and double spiral
- DUAL spiral with increased wear resistance
- massive, high centering tip significantly improves drilling start
- very long service life
- very good overall performance

S060271502	Ø 5 x 115 mm	50 mm	1/30	pc
S060271503	Ø 5 x 165 mm	100 mm	1/30	pc
S060271504	Ø 5,5 x 115 mm	50 mm	1/30	pc
S060271505	Ø 5,5 x 165 mm	100 mm	1/30	pc
S060271507	Ø 6 x 115 mm	50 mm	1/50	pc
S060271506	Ø 6 x 165 mm	100 mm	1/50	pc
S060271509	Ø 6 x 215 mm	150 mm	1/100	pc
S060271512	Ø 6 x 265 mm	200 mm	1/120	pc
S060271513	Ø 6 x 315 mm	250 mm	1/50	pc
S060271514	Ø 6,5 x 165 mm	100 mm	1/50	pc
S060271516	Ø 6,5 x 215 mm	150 mm	1/180	pc
S060271517	Ø 6,5 x 265 mm	200 mm	1/50	pc
S060271519	Ø 6,5 x 315 mm	250 mm	1/50	pc
S060271520	Ø 7 x 115 mm	50 mm	1/50	pc
S060271515	Ø 7 x 165 mm	100 mm	1/50	pc
S060271522	Ø 8 x 115 mm	50 mm	1/30	pc
S060271518	Ø 8 x 165 mm	100 mm	1/150	pc
S060271521	Ø 8 x 215 mm	150 mm	1/50	pc
S060271524	Ø 8 x 265 mm	200 mm	1/150	pc
S060271525	Ø 8 x 315 mm	250 mm	1/50	pc
S060271526	Ø 8 x 465 mm	400 mm	1/30	pc
S060271528	Ø 10 x 115 mm	50 mm	1/100	pc
S060271527	Ø 10 x 165 mm	100 mm	1/100	pc
S060271530	Ø 10 x 215 mm	150 mm	1/50	pc
S060271533	Ø 10 x 265 mm	200 mm	1/60	pc
S060271536	Ø 10 x 315 mm	250 mm	1/80	pc
S060271539	Ø 10 x 465 mm	400 mm	1/50	pc
S060271541	Ø 10 x 600 mm	550 mm	1/15	pc
S060271540	Ø 12 x 165 mm	100 mm	1/100	pc
S060271542	Ø 12 x 215 mm	150 mm	1/50	pc
S060271545	Ø 12 x 265 mm	200 mm	1/50	pc
S060271548	Ø 12 x 315 mm	250 mm	1/50	pc
S060271551	Ø 12 x 465 mm	400 mm	1/50	pc
S060271552	Ø 12 x 600 mm	550 mm	1/15	pc
S060271553	Ø 12 x 1000 mm	950 mm	1/9	pc
S060271555	Ø 14 x 165 mm	100 mm	1/100	pc
S060271554	Ø 14 x 215 mm	150 mm	1/50	pc
S060271556	Ø 14 x 265 mm	200 mm	1/50	pc
S060271558	Ø 14 x 315 mm	250 mm	1/50	pc
S060271560	Ø 14 x 465 mm	400 mm	1/40	pc
S060271562	Ø 14 x 600 mm	550 mm	1/15	pc
S060271564	Ø 14 x 1000 mm	950 mm	1/9	pc
S060271566	Ø 15 x 265 mm	200 mm	1/30	pc
S060271568	Ø 16 x 215 mm	150 mm	1/70	pc
S060271570	Ø 16 x 265 mm	200 mm	1/50	pc
S060271572	Ø 16 x 315 mm	250 mm	1/50	pc
S060271574	Ø 16 x 465 mm	400 mm	1/20	pc
S060271576	Ø 16 x 600 mm	550 mm	1/15	pc
S060271578	Ø 16 x 1000 mm	950 mm	1/9	pc
S060271580	Ø 18 x 250 mm	200 mm	1/40	pc
S060271582	Ø 18 x 450 mm	400 mm	1/10	pc
S060271584	Ø 20 x 250 mm	200 mm	1/30	pc
S060271586	Ø 20 x 450 mm	400 mm	1/25	pc
S060271588	Ø 22 x 250 mm	200 mm	1/35	pc
S060271590	Ø 22 x 450 mm	400 mm	1/20	pc
S060271594	Ø 24 x 450 mm	400 mm	1/10	pc
S060271598	Ø 25 x 450 mm	400 mm	1/10	pc

Concrete drill SDS max X5



- drill head made of sintered carbides for maximum durability
- drill made of high quality steel alloy, making a reliable tool
- innovative carbide cutting geometry ensures an aggressive demolition effect
- enhanced spiral bevels provide optimum drilling in contact with rebar
- core with reinforced spiral geometry provides more energy upon impact with carbide-tipped drill bit
- for hard concrete, reinforced concrete, natural stone
- rotary hammers with SDS max chuck

S-71402	Ø 12 x 340 mm	200 mm	1/20	pc
S-71404	Ø 12 x 540 mm	400 mm	1/15	pc
S-71406	Ø 14 x 340 mm	200 mm	1/20	pc
S-71408	Ø 14 x 540 mm	400 mm	1/15	pc
S-71409	Ø 12 x 740 mm	600 mm	1/15	pc
S-71410	Ø 16 x 340 mm	200 mm	1/20	pc
S-71412	Ø 16 x 540 mm	400 mm	1/15	pc
S-71414	Ø 18 x 340 mm	200 mm	1/20	pc
S-71416	Ø 18 x 540 mm	400 mm	1/15	pc
S-71418	Ø 20 x 320 mm	200 mm	1/20	pc
S-71420	Ø 20 x 520 mm	400 mm	1/15	pc
S-71421	Ø 20 x 920 mm	800 mm	1/20	pc
S-71422	Ø 22 x 320 mm	200 mm	1/20	pc
S-71424	Ø 24 x 320 mm	200 mm	1/10	pc
S-71426	Ø 22 x 520 mm	400 mm	1/15	pc
S-71427	Ø 22 x 920 mm	800 mm	1/15	pc
S-71428	Ø 24 x 520 mm	400 mm	1/10	pc
S-71430	Ø 25 x 320 mm	200 mm	1/10	pc
S-71432	Ø 25 x 520 mm	400 mm	1/10	pc
S-71433	Ø 25 x 920 mm	800 mm	1/10	pc
S-71434	Ø 28 x 370 mm	250 mm	1/10	pc
S-71435	Ø 26 x 520 mm	400 mm	1/10	pc
S-71436	Ø 28 x 570 mm	450 mm	1/10	pc
S-71437	Ø 28 x 670 mm	550 mm	1/10	pc
S-71438	Ø 30 x 370 mm	250 mm	1/10	pc
S-71440	Ø 30 x 570 mm	450 mm	1/8	pc
S-71442	Ø 32 x 370 mm	250 mm	1/8	pc
S-71444	Ø 32 x 570 mm	450 mm	1/8	pc
S-71445	Ø 32 x 920 mm	800 mm	1/5	pc
S-71446	Ø 35 x 370 mm	250 mm	1/5	pc
S-71448	Ø 35 x 570 mm	450 mm	1/8	pc
S-71449	Ø 35 x 670 mm	550 mm	1/5	pc
S-71450	Ø 38 x 370 mm	250 mm	1/5	pc
S-71451	Ø 38 x 570 mm	450 mm	1/5	pc
S-71452	Ø 40 x 570 mm	450 mm	1/5	pc
S-71453	Ø 40 x 920 mm	800 mm	1/3	pc
S-71454	Ø 45 x 570 mm	450 mm	1/5	pc
S-71455	Ø 52 x 570 mm	450 mm	1/4	pc

Concrete drill V3 SDS plus



- causes microcracks in the drilled material
- achieves a noticeably higher drilling speed
- reduced probability of the drill getting blocked in the material as a result of contact with rebar
- centering the tip ensures immediate drilling and prevents the drill bit from slipping off smooth surfaces
- improved Vario KVS weave
- conical spiral
- increased speed and endurance
- fracture resistance
- for hard concrete, reinforced concrete, natural stone
- rotary hammers with SDS plus handle

S-71041	Ø 4 x 110 mm	50 mm	1/50	pc
S-71042	Ø 4 x 160 mm	100 mm	1/50	pc
S-71051	Ø 5 x 110 mm	50 mm	1/50	pc
S-71052	Ø 5 x 160 mm	100 mm	1/50	pc
S-71053	Ø 5 x 210 mm	150 mm	1/50	pc
S-71054	Ø 5 x 260 mm	200 mm	1/50	pc
S-71055	Ø 5,5 x 110 mm	50 mm	1/50	pc
S-71056	Ø 5 x 310 mm	250 mm	1/50	pc
S-71057	Ø 5,5 x 160 mm	100 mm	1/50	pc
S-71058	Ø 5,5 x 210 mm	150 mm	1/50	pc
S-71059	Ø 5,5 x 260 mm	200 mm	1/50	pc
S-71060	Ø 5,5 x 310 mm	250 mm	1/50	pc
S-71061	Ø 6 x 110 mm	50 mm	1/50	pc
S-71062	Ø 6 x 160 mm	100 mm	1/50	pc
S-71063	Ø 6 x 210 mm	160 mm	1/50	pc
S-71064	Ø 6 x 260 mm	210 mm	1/50	pc
S-71065	Ø 6 x 460 mm	400 mm	1/50	pc
S-71066	Ø 6 x 310 mm	250 mm	1/50	pc
S-71067	Ø 6,5 x 160 mm	100 mm	1/50	pc
S-71068	Ø 6,5 x 210 mm	150 mm	1/50	pc
S-71069	Ø 6,5 x 260 mm	200 mm	1/50	pc
S-71070	Ø 6,5 x 310 mm	250 mm	1/50	pc
S-71071	Ø 6,5 x 110 mm	50 mm	1/50	pc
S-71072	Ø 7 x 160 mm	100 mm	1/50	pc
S-71081	Ø 8 x 110 mm	50 mm	1/50	pc
S-71082	Ø 8 x 100 mm	100 mm	1/50	pc
S-71083	Ø 8 x 210 mm	150 mm	1/50	pc
S-71084	Ø 8 x 260 mm	200 mm	1/50	pc
S-71085	Ø 8 x 310 mm	250 mm	1/50	pc
S-71087	Ø 8 x 460 mm	400 mm	1/50	pc
S-71089	Ø 8 x 600 mm	540 mm	1/50	pc
S-71091	Ø 9 x 160 mm	100 mm	1/50	pc
S-71101	Ø 10 x 110 mm	50 mm	1/50	pc
S-71102	Ø 10 x 160 mm	100 mm	1/50	pc
S-71103	Ø 10 x 210 mm	150 mm	1/50	pc
S-71104	Ø 10 x 260 mm	200 mm	1/50	pc
S-71105	Ø 10 x 310 mm	260 mm	1/50	pc
S-71106	Ø 10 x 350 mm	290 mm	1/50	pc
S-71107	Ø 10 x 450 mm	400 mm	1/50	pc
S-71109	Ø 10 x 600 mm	540 mm	1/50	pc
S-71122	Ø 12 x 160 mm	110 mm	1/50	pc
S-71123	Ø 12 x 210 mm	160 mm	1/50	pc
S-71124	Ø 12 x 260 mm	210 mm	1/30	pc
S-71125	Ø 12 x 310 mm	260 mm	1/30	pc
S-71126	Ø 12 x 360 mm	310 mm	1/30	pc
S-71127	Ø 12 x 450 mm	400 mm	1/30	pc
S-71129	Ø 12 x 600 mm	550 mm	1/30	pc
S-71131	Ø 12 x 1000 mm	950 mm	1/30	pc
S-71142	Ø 14 x 160 mm	110 mm	1/25	pc
S-71143	Ø 14 x 210 mm	160 mm	1/25	pc
S-71144	Ø 14 x 260 mm	210 mm	1/30	pc
S-71145	Ø 14 x 310 mm	260 mm	1/30	pc
S-71146	Ø 14 x 450 mm	400 mm	1/30	pc
S-71147	Ø 14 x 600 mm	550 mm	1/30	pc
S-71148	Ø 14 x 1000 mm	950 mm	1/20	pc
S-71152	Ø 15 x 210 mm	160 mm	1/25	pc
S-71162	Ø 16 x 260 mm	210 mm	1/30	pc
S-71163	Ø 16 x 210 mm	160 mm	1/25	pc
S-71164	Ø 16 x 310 mm	260 mm	1/30	pc
S-71165	Ø 16 x 450 mm	400 mm	1/30	pc
S-71167	Ø 16 x 600 mm	550 mm	1/30	pc
S-71168	Ø 16 x 1000 mm	950 mm	1/30	pc
S-71182	Ø 18 x 200 mm	150 mm	1/30	pc
S-71184	Ø 18 x 600 mm	550 mm	1/20	pc
S-71185	Ø 18 x 300 mm	250 mm	1/20	pc
S-71186	Ø 18 x 1000 mm	950 mm	1/30	pc
S-71187	Ø 18 x 450 mm	400 mm	1/25	pc
S-71202	Ø 20 x 200 mm	150 mm	1/30	pc
S-71203	Ø 20 x 300 mm	250 mm	1/20	pc
S-71204	Ø 20 x 450 mm	400 mm	1/20	pc
S-71205	Ø 20 x 600 mm	550 mm	1/20	pc
S-71206	Ø 22 x 450 mm	400 mm	1/20	pc
S-71207	Ø 24 x 450 mm	400 mm	1/15	pc
S-71208	Ø 25 x 450 mm	400 mm	1/15	pc
S-71209	Ø 26 x 450 mm	400 mm	1/15	pc

Concrete drill multi



- innovative head design made of sintered carbide
- the drill bit spiral ensures optimal removal of cuttings

S-71289	Ø 4 x 75 mm	46 mm	1/30	pc
S-71291	Ø 5 x 85 mm	53 mm	1/25	pc
S-71293	Ø 6 x 100 mm	60 mm	1/25	pc
S-71295	Ø 8 x 120 mm	73 mm	1/20	pc
S-71297	Ø 8 x 200 mm	130 mm	1/10	pc
S-71298	Ø 10 x 120 mm	73 mm	1/20	pc
S-71299	Ø 10 x 200 mm	130 mm	1/10	pc
S-71300	Ø 12 x 150 mm	90 mm	1/20	pc

Concrete drill, cylindrical



- innovative head design made of sintered carbide
- te spiral of the drill bit ensures optimal chipping removal
- for concrete, masonry, brick, stone
- for impact drills

S-71301	Ø 3 x 70 mm	40 mm	1/250	pc
S-71304	Ø 4 x 75 mm	40 mm	1/200	pc
S-71307	Ø 5 x 85 mm	50 mm	1/150	pc
S-71310	Ø 6 x 100 mm	60 mm	1/100	pc
S-71313	Ø 6 x 150 mm	90 mm	1/100	pc
S-71316	Ø 8 x 120 mm	80 mm	1/100	pc
S-71319	Ø 8 x 200 mm	150 mm	1/50	pc
S-71320	Ø 8 x 400 mm	350 mm	1/25	pc
S-71322	Ø 10 x 120 mm	80 mm	1/65	pc
S-71325	Ø 10 x 200 mm	150 mm	1/50	pc
S-71326	Ø 10 x 400 mm	350 mm	1/25	pc
S-71328	Ø 12 x 150 mm	90 mm	1/50	pc
S-71331	Ø 12 x 200 mm	150 mm	1/40	pc
S-71332	Ø 12 x 400 mm	350 mm	1/25	pc
S-71334	Ø 14 x 150 mm	90 mm	1/45	pc
S-71336	Ø 14 x 400 mm	350 mm	1/20	pc
S-71337	Ø 16 x 160 mm	100 mm	1/40	pc
S-71339	Ø 16 x 400 mm	350 mm	1/20	pc
S-71340	Ø 18 x 160 mm	100 mm	1/20	pc
S-71343	Ø 20 x 160 mm	100 mm	1/20	pc
S-71345	Ø 20 x 400 mm	350 mm	1/10	pc

Tunnel drill SDS max



- bell-shaped head
- asymmetrically spaced sintered carbide plates
- strong head design
- very fast drilling

S-71457	Ø 40 x 550 mm	420 mm	1/5	pc
S-71459	Ø 45 x 550 mm	420 mm	1/5	pc
S-71461	Ø 45 x 990 mm	850 mm	1/3	pc
S-71463	Ø 55 x 550 mm	420 mm	1/5	pc
S-71465	Ø 55 x 990 mm	850 mm	1/3	pc
S-71467	Ø 65 x 550 mm	420 mm	1/5	pc
S-71469	Ø 65 x 990 mm	850 mm	1/2	pc
S-71471	Ø 80 x 550 mm	420 mm	1/5	pc
S-71473	Ø 80 x 990 mm	850 mm	1/2	pc

Multi-purpose concrete drill bit (non-hammer)



- non-hammer drilling in masonry, ceramics, stone, tiles, metal, wood, and plastics; dedicated to non-hammer drilling in Porotherm blocks when installing façade insulation systems.

S060272187	Ø 6 x 160 mm	100 mm	1/100	pc
S060272189	Ø 8 x 160 mm	100 mm	1/100	pc
S060272191	Ø 8 x 260 mm	200 mm	1/100	pc
S060272193	Ø 8 x 450 mm	400 mm	1/100	pc
S060272194	Ø 10 x 160 mm	100 mm	1/100	pc
S060272195	Ø 10 x 260 mm	200 mm	1/100	pc
S060272197	Ø 10 x 450 mm	400 mm	1/100	pc

Wood drill



- centering point ensures accurate drilling
- fast chip evacuation
- drilling without chipping
- for hard and soft wood

S-71395	Ø 3 x 61 mm	33 mm	1/100/500	pc
S-71397	Ø 4 x 75 mm	43 mm	1/100/500	pc
S-71399	Ø 5 x 86 mm	52 mm	1/100/500	pc
S-71401	Ø 6 x 93 mm	57 mm	1/100/500	pc
S-71403	Ø 8 x 117 mm	75 mm	1/50/250	pc
S-71405	Ø 10 x 133 mm	87 mm	1/50/250	pc
S-71407	Ø 12 x 151 mm	101 mm	1/50/150	pc

Wood drill



- several times faster than flat drills and paddle drills
- carbon steel body
- triple helix
- threaded tip

S-71381	Ø 16 x 165 mm	65 mm	1/50/200	pc
S-71383	Ø 18 x 165 mm	65 mm	1/25/100	pc
S-71385	Ø 20 x 165 mm	75 mm	1/25/100	pc
S-71387	Ø 22 x 165 mm	75 mm	1/25/100	pc
S-71389	Ø 25 x 165 mm	85 mm	1/25/100	pc
S-71391	Ø 28 x 165 mm	85 mm	1/25/100	pc
S-71393	Ø 32 x 165 mm	85 mm	1/25/100	pc

Wood borer



- carbon steel body
- threaded head cone provides precision of the drilling direction
- drilling without chipping
- for hard and soft wood

S-71351	Ø 6 x 230 mm	160 mm	1/50/200	pc
S-71353	Ø 8 x 230 mm	160 mm	1/50/200	pc
S-71355	Ø 10 x 230 mm	160 mm	1/50/200	pc
S-71357	Ø 12 x 230 mm	160 mm	1/50/200	pc
S-71359	Ø 14 x 230 mm	160 mm	1/50/200	pc
S-71361	Ø 16 x 230 mm	160 mm	1/50/200	pc
S-71363	Ø 20 x 230 mm	160 mm	1/50/100	pc
S-71365	Ø 22 x 230 mm	160 mm	1/50/100	pc
S-71367	Ø 10 x 460 mm	375 mm	1/50/100	pc
S-71369	Ø 12 x 460 mm	375 mm	1/50/100	pc
S-71371	Ø 14 x 460 mm	375 mm	1/50/100	pc
S-71373	Ø 16 x 460 mm	375 mm	1/50/100	pc
S-71375	Ø 18 x 460 mm	375 mm	1/25/100	pc
S-71377	Ø 20 x 460 mm	375 mm	1/25/50	pc
S-71379	Ø 22 x 460 mm	375 mm	1/25/50	pc

Adapter for flat wood drills and bits



- 1/4" hex grip
- made of specially hardened steel

S-72045	300 mm	1/50	pc

Flat wood drill



- special head geometry for faster and more accurate drilling
- for hard and soft wood
- made of specially hardened steel

S-72001	Ø 6 x 152 mm	1/50	pc
S-72003	Ø 8.0 x 152 mm	1/50	pc
S-72005	Ø 10 x 152 mm	1/50	pc
S-72007	Ø 12 x 152 mm	1/50	pc
S-72009	Ø 13 x 152 mm	1/50	pc
S-72011	Ø 14 x 152 mm	1/50	pc
S-72013	Ø 16 x 152 mm	1/50	pc
S-72015	Ø 17 x 152 mm	1/50	pc
S-72017	Ø 18 x 152 mm	1/50	pc
S-72019	Ø 19 x 152 mm	1/50	pc
S-72021	Ø 20 x 152 mm	1/50	pc
S-72023	Ø 22 x 152 mm	1/50	pc
S-72025	Ø 24 x 152 mm	1/50	pc
S-72027	Ø 25 x 152 mm	1/50	pc
S-72029	Ø 26 x 152 mm	1/50	pc
S-72031	Ø 28 x 152 mm	1/50	pc
S-72033	Ø 30 x 152 mm	1/50	pc
S-72035	Ø 32 x 152 mm	1/50	pc
S-72037	Ø 35 x 152 mm	1/50	pc
S-72039	Ø 36 x 152 mm	1/50	pc
S-72041	Ø 38 x 152 mm	1/50	pc
S-72043	Ø 40 x 152 mm	1/50	pc

Glass drill bit



- tungsten carbide tip hardness: 89.5 HRA
- double cutting plate
- rapid-change mandrel, easy to install and remove, no slipping
- end stroke less than 1% of total length
- precise sharpening, good drilling sharpness
- shank hardness 30 HRC

S-72170	overall length: 73 ; diameter: Ø 4	1/5/75	pc
S-72172	overall length: 75 ; diameter: Ø 5	1/5/60	pc
S-72174	overall length: 75 ; diameter: Ø 6	1/5/60	pc
S-72176	overall length: 83 ; diameter: Ø 8	1/5/50	pc
S-72178	overall length: 86 ; diameter: Ø 10	1/5/50	pc
S-72180	overall length: 88 ; diameter: Ø 12	1/5/50	pc

Glass drill bit set



- tungsten carbide tip hardness: 89.5 HRA
- double cutting plate
- rapid-change mandrel, easy to install and remove, no slipping
- end stroke less than 1% of total length
- precise sharpening, good drilling sharpness
- shank hardness 30 HRC

S-72182	diameter: SET Ø 4 - Ø 10 ; 5 EL	1/80	set


SDS plus pointed chisel



Application:
- reinforced concrete
- concrete
- stone
- solid brick
- ceramic hollow block

S060571601	250 mm	1/25	pc

SDS plus narrow chisel

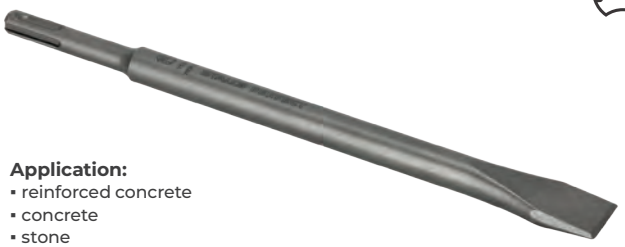

Application:
- reinforced concrete
- concrete
- stone
- solid brick
- ceramic hollow block

S060571603	20 x 250 mm	1/25	pc

SDS plus wide chisel



Application:
- reinforced concrete
- concrete
- stone
- solid brick
- ceramic hollow block

S060571605	40 x 250 mm	1/20	pc

SDS plus hollow chisel



Application:
- concrete
- solid brick
- ceramic hollow block

S060571607	22 x 250 mm	1/20	pc

SDS plus self-sharpening pointed chisel



Application:
- reinforced concrete
- concrete
- stone
- solid brick
- ceramic hollow block

S060571625	250 mm	1/25	pc

SDS plus tile chisel



Application:
- tiles
- tiles with adhesive, adhesives

S060572351	40 x 260 mm	1/20	pc

SDS plus self-sharpening narrow chisel



Application:
- reinforced concrete
- concrete
- stone
- solid brick
- ceramic hollow block

S060571626	20 x 250 mm	1/25	pc

SDS max pointed chisel



Application:
- reinforced concrete
- concrete
- stone
- solid brick
- ceramic hollow block

S060571612	400 mm	1/10	pc

SDS plus self-sharpening wide chisel



Application:
- reinforced concrete
- concrete
- stone
- solid brick
- ceramic hollow block

S060572350	40 x 250 mm	1/20	pc

SDS max pointed chisel



Application:
- reinforced concrete
- concrete
- stone
- solid brick
- ceramic hollow block

S060571614	600 mm	1/12	pc

SDS plus self-sharpening wide chisel



Application:
- reinforced concrete
- concrete
- stone
- solid brick
- ceramic hollow block

S060572354	60 x 250 mm	1/20	pc

SDS max narrow chisel



Application:
- reinforced concrete
- concrete
- stone
- solid brick
- ceramic hollow block

S060571616	27 x 280 mm	1/16	pc

SDS max narrow chisel



Application:
- reinforced concrete
- concrete
- stone
- solid brick
- ceramic hollow block

S060571618	27 x 400 mm	1/10	pc

SDS max hollow chisel



Application:
- concrete
- solid brick
- ceramic hollow block

S060572357	26 x 300 mm	1/10	pc

SDS max narrow chisel



Application:
- reinforced concrete
- concrete
- stone
- solid brick
- ceramic hollow block

S060571620	27 x 600 mm	1/12	pc


SDS max self-sharpening pointed chisel



Application:
- reinforced concrete
- concrete
- stone
- solid brick
- ceramic hollow block

S060571627	400 mm	1/10	pc

SDS max wide chisel

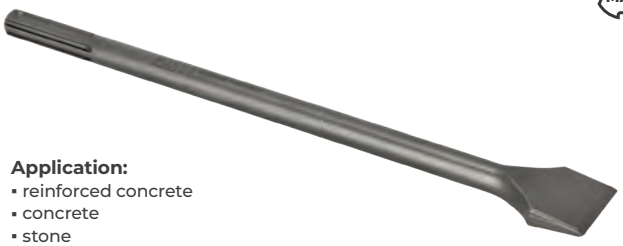

Application:
- reinforced concrete
- concrete
- stone
- solid brick
- ceramic hollow block

S060571622	50 x 400 mm	1/10	pc

SDS max self-sharpening narrow chisel



Application:
- reinforced concrete
- concrete
- stone
- solid brick
- ceramic hollow block

S060571628	25 x 400 mm	1/10	pc


SDS max wide chisel



Application:
- reinforced concrete
- concrete
- stone
- solid brick
- ceramic hollow block

S060571624	75 x 300 mm	1/10	pc

SDS max self-sharpening wide chisel

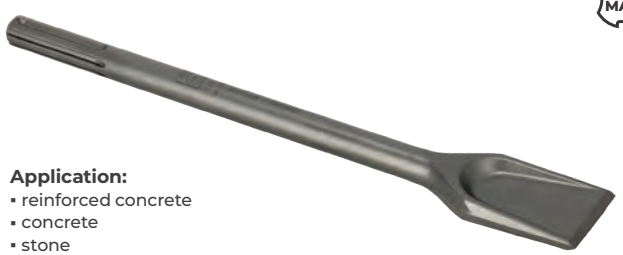

Application:
- reinforced concrete
- concrete
- stone
- solid brick
- ceramic hollow block

S060572352	50 x 350 mm	1/10	pc

SDS max self-sharpening wide chisel



Application:
- reinforced concrete
- concrete
- stone
- solid brick
- ceramic hollow block

S060572355	80 x 400 mm	1/10	pc

SDS max bush hammer holder



- for bush hammer S060572359

S060572358	220 mm	1/25	pc

SDS max self-sharpening wide chisel



Application:
- reinforced concrete
- concrete
- stone
- solid brick
- ceramic hollow block

S060572356	115 x 400 mm	1/5	pc

HEX 30 pointed chisel



Application:
- reinforced concrete
- concrete
- stone
- solid brick
- ceramic hollow block

S060571629	400 mm	1/5	pc

SDS max tile chisel



Application:
- tiles
- tiles with adhesive, adhesives

S060572353	50 x 300 mm	1/5	pc


HEX 30 flat chisel



Application:
- reinforced concrete
- concrete
- stone
- solid brick
- ceramic hollow block

S060571630	35 x 410 mm	1/5	pc

SDS max bush hammer tool

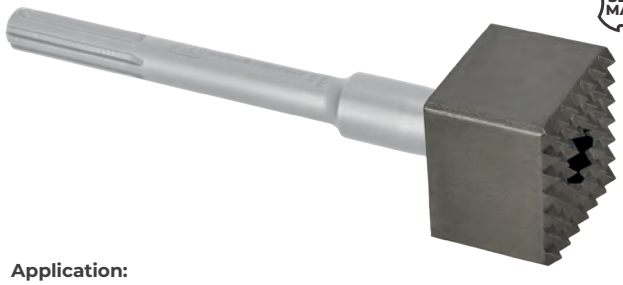

Application:
- concrete

S060572359	60 x 60 mm 7 x 7 zębów	1/8	pc


HEX 30 wide chisel



Application:
- reinforced concrete
- concrete
- stone
- solid brick
- ceramic hollow block

S060572360	75 x 410 mm	1/3	pc

HEX 30 spade chisel

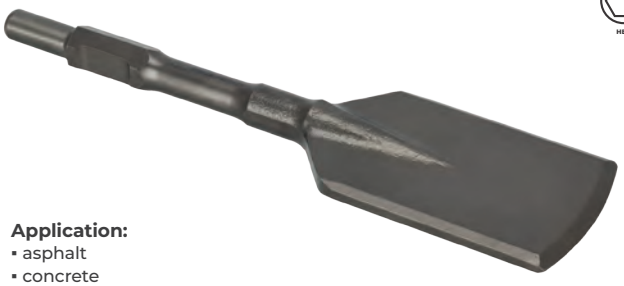

Application:
- asphalt
- concrete
- soil

S060572361	125 x 450 mm	1/3	pc

Openers and diamond technology

Diamond core drill bit



- for wet or dry use
- when drilling in reinforced concrete, use only wet
- when drilling in concrete, porotherm, brick and other non-reinforced materials, drilling can be done dry or wet
- high-quality diamond ring
- fast operation
- long service life
- high precision and workmanship quality
- high overall performance

S062270646	Ø 22/450 mm	1/10	pc
S062270648	Ø 24/450 mm	1	pc
S062270650	Ø 25/450 mm	1/10	pc
S062270654	Ø 28/450 mm	1	pc
S062270656	Ø 30/450 mm	1	pc
S062270658	Ø 32/450 mm	1	pc
S062270660	Ø 35/450 mm	1/1	pc
S062270662	Ø 40/450 mm	1	pc

Diamond core drill bit for micro-impact drilling



- designed primarily for fast drilling through reinforced concrete
- does not require high pressure when drilling manually
- does not require access to a water source
- shorter and lighter core bits provide more comfortable manual operation
- recommended especially for work in already finished interiors
- reduces preparation time before starting and finishing the job
- for dry use
- high-quality diamond segments
- fast operation
- long service life
- high precision and workmanship quality

S062270810	Ø 52/300 mm	1/15	pc
S062270812	Ø 62/300 mm	1/6	pc
S062270814	Ø 76/300 mm	1/10	pc
S062270816	Ø 82/300 mm	1/10	pc
S062270818	Ø 92/300 mm	1/6	pc
S062270820	Ø 112/300 mm	1/5	pc
S062270822	Ø 127/300 mm	1/6	pc
S062270824	Ø 132/300 mm	1/6	pc

Diamond core drill bit



- for wet or dry use
- when drilling in reinforced concrete, use only wet
- when drilling in concrete, porotherm, brick and other non-reinforced materials, drilling can be done dry or wet
- high-quality, sharp SHARK diamond segments
- fast operation
- long service life
- very high precision and workmanship quality
- very high overall performance”

S062270664	Ø 42/450 mm	1	pc
S062270666	Ø 52/450 mm	1	pc
S062270668	Ø 62/450 mm	1	pc
S062270670	Ø 72/450 mm	1	pc
S062270672	Ø 82/450 mm	1	pc
S062270674	Ø 102/450 mm	1	pc
S062270676	Ø 112/450 mm	1	pc
S062270678	Ø 122/450 mm	1	pc
S062270680	Ø 132/450 mm	1	pc
S062270682	Ø 142/450 mm	1	pc
S062270684	Ø 152/450 mm	1	pc
S062270686	Ø 162/450 mm	1	pc
S062270688	Ø 182/450 mm	1	pc
S062270690	Ø 200/450 mm	1	pc
S062270692	Ø 225/450 mm	1	pc
S062270694	Ø 250/450 mm	1	pc
S062270714	Ø 280/450 mm	1	pc
S062270716	Ø 300/450 mm	1	pc
S062270718	Ø 350/450 mm	1	pc
S062270719	Ø 400/450 mm	1	pc

Extension 500 1 1/4”



S062270696	500 mm / 1 1/4”	1	pc
S062270698	300 mm / 1 1/4”	1	pc

Extension 500 R 1/2”



S062270700	500 mm/ R 1/2”	1	pc
S062270702	300 mm / R 1/2”	1	pc

Adapter 1 1/4 to R 1/2



S062270704	1 1/4 for R 1/2	1	pc

Adapter czop 1 1/4 to R 1/2



S062270706	1 1/4 for R 1/2	1	pc

SDS max adapter



- enables mounting diamond core drill bits with 1 1/4” UNC thread (male) and R 1/2” thread (female) in SDS Max rotary hammers
- allows the use of core drill bits without the need to purchase a core drilling machine

S062270707	200 mm	1/25	pc

Adapter hilti bi+



- compatible with: HILTI DD-110, 120, 130, 150, 160

S062270708	BI+	1	pc

Adapter hilti bu



- compatible with: HILTI DD-160

S062270710	BU	1	pc

Adapter hilti bl



- compatible with: HILTI DD-200, 250, 350, 500

S062270712	BL	1	pc

Diamond hole saws



- diamond-coated cutting edges
- body shaped from a single piece of steel
- M14 handle
- plastic box
- for impact-free, dry drilling in glass, marble, granite etc.
- Ø 6,0 ; 8,0 ; 10,0 ; 12,0 ; 20,0 ; 27,0 ; 35,0 ; 50,0 ; 55,0 ; 60,0 ; 75,0 mm

S-71038	Ø 6,0 - 75,0 mm ; max. 13000 rpm ; 11 el.	1/10	pc

Diamond drill



- diamond-coated cutting edges
- body shaped from a single piece of steel
- hex handle
- for impact-free, dry drilling in glass, marble, granite etc.

S-71001	Ø 6.0 mm	1/10/100	pc
S-71003	Ø 8.0 mm	1/10/100	pc
S-71005	Ø 10.0 mm	1/10/100	pc
S-71007	Ø 12.0 mm	1/10/100	pc

Diamond hole saw



- diamond-coated cutting edges
- body shaped from a single piece of steel
- M14 handle
- for impact-free, dry drilling in glass, marble, granite etc.

S-71002	Ø 6.0 mm	1/10	pc
S-71004	Ø 8.0 mm	1/10	pc
S-71006	Ø 10.0 mm	1/10	pc
S-71008	Ø 12.0 mm	1/10	pc
S-71009	Ø 20.0 mm	1/10/20	pc
S-71011	Ø 25.0 mm	1/10/20	pc
S-71013	Ø 27.0 mm	1/10/20	pc
S-71015	Ø 35.0 mm	1/10/20	pc
S-71017	Ø 55.0 mm	1/5/20	pc
S-71019	Ø 65.0 mm	1/5/20	pc
S-71020	Ø 68.0 mm	1/5/20	pc
S-71021	Ø 75.0 mm	1/5/20	pc

Fast change-plus adapter for hole saws



- provides convenient and quick replacement of holesaws
- hexagonal handle Ø 8.7 mm
- a centering drill must be purchased additionally with the adapter: S-70774

S-70776	Ø 14-210 mm	1/60	pc

Hole saw bimetal



- very long service life
- the geometry of the teeth ensures very fast and precise cutting of the hole
- high cobalt admixture
- holesaw length 44 mm
- material: wood, plasterboard, plastic, metal, stainless steel
- compatible with adapter in the CLICK system

S-70720	Ø 20 mm	1/50	pc
S-70722	Ø 22 mm	1/50	pc
S-70724	Ø 25 mm	1/25	pc
S-70726	Ø 27 mm	1/25	pc
S-70728	Ø 30 mm	1/25	pc
S-70730	Ø 32 mm	1/25	pc
S-70732	Ø 35 mm	1/25	pc
S-70734	Ø 38 mm	1/25	pc
S-70736	Ø 40 mm	1/25	pc
S-70738	Ø 44 mm	1/25	pc
S-70740	Ø 48 mm	1/25	pc
S-70742	Ø 51 mm	1/25	pc
S-70744	Ø 54 mm	1/25	pc
S-70746	Ø 60 mm	1/25	pc
S-70748	Ø 64 mm	1/25	pc
S-70750	Ø 65 mm	1/25	pc
S-70752	Ø 67 mm	1/25	pc
S-70754	Ø 68 mm	1/20	pc
S-70756	Ø 70 mm	1/20	pc
S-70758	Ø 76 mm	1/20	pc
S-70760	Ø 79 mm	1/20	pc
S-70762	Ø 83 mm	1/20	pc
S-70764	Ø 89 mm	1/20	pc
S-70766	Ø 102 mm	1/10	pc
S-70768	Ø 105 mm	1/10	pc
S-70770	Ø 114 mm	1/10	pc
S-70772	Ø 127 mm	1/8	pc

HSS-G drill bit for hole saws



- centering drill bit with 1/4" hexagonal handle
- ground tip, angle 135°

S-70774	Ø 85 mm	1/100	pc

Progressor hole saw set



- 6 bi-metal holesaws
- 1 Power Change adapter
- 2 HSS-G centering drill bits

S-70778	for sanitary fitters 20 ; 25 ; 32 ; 38 ; 51 ; 68 mm	1	pc
S-70780	for electricians 22 ; 30 ; 35 ; 44 ; 51 ; 68 mm	1	pc

Hole saw multi



- for hard and soft materials
- sintered carbide teeth

S-70596	Ø 19 mm	1/30	pc
S-70598	Ø 22 mm	1/30	pc
S-70600	Ø 25 mm	1/30	pc
S-70602	Ø 32 mm	1/15	pc
S-70604	Ø 35 mm	1/15	pc
S-70606	Ø 40 mm	1/15	pc
S-70608	Ø 44 mm	1/10	pc
S-70610	Ø 51 mm	1/10	pc
S-70612	Ø 54 mm	1/5	pc
S-70616	Ø 60 mm	1/5	pc
S-70618	Ø 64 mm	1/5	pc
S-70620	Ø 68 mm	1/5	pc
S-70622	Ø 73 mm	1/5	pc
S-70624	Ø 76 mm	1/5	pc
S-70626	Ø 83 mm	1/5	pc
S-70628	Ø 92 mm	1/5	pc
S-70630	Ø 102 mm	1/5	pc
S-70632	Ø 127 mm	1	pc

Adapter HEX for multi hole saws



S-70634	Ø 14 - Ø 30 mm	1/15	pc
S-70636	Ø 32 - Ø 210 mm	1/10	pc

Diamond concrete hole saw



- for making holes for the installation of electrical, distribution and vacuum boxes
- designed for non-hammered drilling
- turbo diamond segment
- spiral-shaped excavated material transport surface
- ejection openings
- recommended adapters: SDS plus adapter S-70801, HEX adapter S-70803

S-70804	Ø 68 x 80 mm ; max. 1450 rpm	1	pc
S-70806	Ø 82 x 80 mm ; max 1200 rpm	1	pc

Diamond hole saw for concrete



- for drilling in concrete, reinforced concrete and natural stones,
- uses a micro-hammer function
- makes holes with a diameter of 68 mm and fits the DBP132 STALCO drilling rig
- equipped with diamond segments
- the banana hole system facilitates the removal of spoil and dust

S-70805	Ø 68 x 80 mm | M16 | Number of diamond segments: 5 (20 x 3.8 x 10 mm) | max rotation speed: 3000 rpm	1/	pc
S-70807	Ø 82 x 80 mm | M16 | number of diamond segments: 6 (20 x 3.8 x 10 mm) | max rotation speed: 1500 rpm	1/	pc

SDS plus adapter for diamond core cutters



- equipped with drill with conical shank and wedge drift
- designed for diamond core cutters S-70804,S-70806

S-70801	Ø 21 x 110 mm ; SDS plus ; M16 ; drill bit: Ø 8 x 120 mm	1	pc

HEX adapter for diamond hole saws



S-70803	Ø 22 x 110 mm ; HEX ; M16 ; drill bit: Ø 8 x 120 mm	1	pc

Saws and blades

Segmented diamond disc



- segment height: 8 mm
- for dry cutting: stone, concrete, granite, cubes, tiles

S-71951	Ø 115 mm	1/50/100	pc
S-71953	Ø 125 mm	1/50/100	pc
S-71955	Ø 180 mm	1/25/50	pc
S-71957	Ø 230 mm	1/25	pc

Continuous diamond disc



- segment height: 8 mm
- for dry and wet cutting: tiles, ceramics, porcelain, marble

S-71959	Ø 115 mm	1/50/100	pc
S-71961	Ø 125 mm	1/50/100	pc
S-71963	Ø 180 mm	1/25/50	pc
S-71965	Ø 200 mm	1/25/50	pc
S-71967	Ø 230 mm	1/25	pc

Diamond disc for ceramics



- segment height: 10 mm
- the shape of the segment prevents the material being cut from chipping
- very long service life
- for dry cutting of: glaze, ceramics, stoneware, porcelain, marble

S-71962	Ø 125 mm	1/50/100	pc
S-71964	Ø 180 mm	1/25/50	pc
S-71966	Ø 200 mm	1/25	pc
S-71968	Ø 230 mm	1/25	pc
S-71970	Ø 250 mm	1/25	pc

Turbo diamond discs



- segment height: 10 mm
- for dry cutting: stone, concrete, granite, reinforced concrete (bars with a diameter of less than 8 mm), cubes, tiles

S-71969	Ø 115 mm	1/50/100	pc
S-71971	Ø 125 mm	1/50/100	pc
S-71973	Ø 180 mm	1/25/50	pc
S-71975	Ø 230 mm	1/25	pc

Carbide cutting disc X-LOCK



- for cutting wood, plastic, plastics, plaster surfaces and thin metal components;
- cutting edge made of carbide grit made using laser melting technology: long service life and safe operation with a variety of materials;
- slim body design with expansion gap prevents blade distortion and ensures extremely high cutting speeds;
- x-LOCK attachment system – the fastest accessory change system on the market. Also suitable for angle grinders for nuts and threads

S-72200	12250 1/min-1 ; M14/Ø 22.23 mm	1	pc

Metal cutting wheel - flat



- very fine grain of the wheel gives an excellent finish effect of the cut surface
- low vibration and noise
- high resistance to mechanical damage

S-71651	Ø 115 mm	1/25	pc
S-71653	Ø 115 mm	1/25	pc
S-71657	Ø 125 mm	1/25	pc
S-71659	Ø 125 mm	1/25	pc
S-71661	Ø 125 mm	1/25	pc
S-71662	Ø 180 mm	1/25	pc
S-71665	Ø 230 mm	1/25	pc
S-71667	Ø 230 mm	1/25	pc
S-71669	Ø 300 mm	1/10	pc
S-71671	Ø 350 mm	1/10	pc
S-71672	Ø 350 mm	1/10	pc
S-71673	Ø 400 mm	1/10	pc

Metal cutting wheel - flat



- for dry cutting: hardened steel, stainless steel, coated steel
- zirconium fill

S-71658	Ø 125 mm	1/25	pc
S-71666	Ø 230 mm	1/25	pc

Saw blade for cutting steel



- does not heat the material – cutting is done by cutting
- teeth made of high-quality carbide
- perfectly smooth cut edge
- up to 10 times the service life of an alumina wheel of similar size

S-71980	Ø 355 x 2/2.4 x Ø 25.4 ; 72 t ; max. 1500 rpm	1/0/10	pc

Aluminium cutting wheel



- cutting wheel for metal sheets, profiles, aluminum elements
- does not discolor the cut material
- does not clog

S-71687	Ø 125 mm	1/25	pc

Stainless steel cutting wheel - flat



- very fine grain of the wheel gives an excellent finish effect of the cut surface
- low vibration and noise
- high resistance to mechanical damage

S-71683	Ø 115 mm	1/25	pc
S-71685	Ø 125 mm	1/25	pc
S-71645	Ø 125 mm	1/10	pc

Saw rasp



- for cutting and grooving
- for processing wood, plastics, rubber

S-71271	Ø 125 mm	1/60	pc
S-71273	Ø 230 mm	1/20	pc

Tapered rasp



- for grinding, milling, stripping
- for processing wood, plastics, rubber

S-71267	Ø 125 mm	1/60	pc


Rasp flat fine



- for grinding
- the shape ensures quick work with the entire surface
- for processing wood, plastics, rubber

S-71269	Ø 125 mm	1/40	pc

Universal rasp

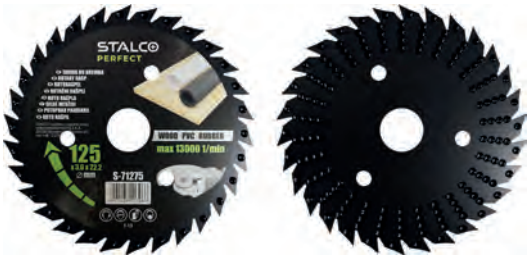

- for cutting, grinding and grooving
- for processing wood, plastics, rubber

S-71275	Ø 125 mm	1/60	pc

Grinding wheels and brushes

Flap disc



- for grinding planes, smoothing welds and removing rust
- purpose: metal, inox stainless steel, acid-proof steel, regular steel, tool steel, hardened steel, non-ferrous metals, wood, varnishes, putty

S-71696	FULL VISION ; Ø 125 mm ; G40	1/10	pc
S-71697	FULL VISION ; Ø 125 x 22,23 mm ; G60	1/10	pc
S-71698	FULL VISION ; Ø 125 x 22,23 mm ; G80	1/10	pc

Flap disc



- zirconium coating
- stripping, grinding of steel and stainless steel

S-71235	Ø 115 mm ; G40 ; zirconium	5/10/120	pc
S-71247	Ø 125 mm ; G40 ; zirconium	5/10/120	pc
S-71250	Ø 125 mm ; G60 ; zirconium	5/10/120	pc
S-71253	Ø 125 mm ; G80 ; zirconium	5/10/120	pc
S-71256	Ø 125 mm ; G100 ; zirconium	5/10/120	pc

Flap disc



- artificial corundum
- universal - stripping, grinding of steel, aluminum, wood, plastics

S-71211	Ø 115 mm ; G40 ; electro corundum	5/10/120	pc
S-71214	Ø 115 mm ; G60 ; electro corundum	5/10/120	pc
S-71217	Ø 115 mm ; G80 ; electro corundum	5/10/120	pc
S-71223	Ø 125 mm ; G40 ; electro corundum	5/10/120	pc
S-71226	Ø 125 mm ; G60 ; electro corundum	5/10/120	pc
S-71229	Ø 125 mm ; G80 ; electro corundum	5/10/120	pc

Ceramic grinding disc



- material: silicon carbide
- semi-flexible grinding wheel
- purpose: stoneware, ceramics, etc.

S-71689	Ø 127 mm ; G36	5/25	pc
S-71690	Ø 127 mm ; G60	5/25	pc
S-71691	Ø 127 mm ; G80	5/25	pc
S-71692	Ø 127 mm ; G100	5/25	pc
S-71693	Ø 127 mm ; G120	5/25	pc

Abrasives

Mesh abrasive disc



- dust extraction over the entire surface, without the effect of clogging
- high efficiency ensuring high productivity
- high tear resistance thanks to a durable mesh backing
- high flexibility
- very high aggressiveness
- minimal degree of sticking
- no dependence on the device's system of extraction holes
- mounting: Velcro, coating: electro-static, binder: resin

S-72300	125 mm, gr.80	50/	pack
S-72302	125 mm, gr.120	50/	pack
S-72304	125 mm, gr.180	50/	pack
S-72306	125 mm, gr.240	50/	pack
S-72308	125 mm, gr.320	50/	pack
S-72310	150 mm, thickness 80	50/	pack
S-72312	150 mm, gr.120	50/	pack
S-72314	150 mm, gr.180	50/	pack
S-72316	150 mm, gr.240	50/	pack
S-72318	150 mm, thickness 320	50/	pack
S-72320	225 mm, gr.80	25/	pack
S-72322	225 mm, gr.120	25/	pack
S-72324	225 mm, gr.180	25/	pack
S-72326	225 mm, gr.240	25/	pack

Mesh abrasive disc - pack of 5.



- dust extraction over the entire surface, without the effect of clogging
- high efficiency ensuring high productivity
- high tear resistance thanks to a durable mesh backing
- high flexibility
- very high aggressiveness
- minimal degree of sticking
- no dependence on the device's system of extraction holes
- mounting: Velcro, coating: electro-static, binder: resin

S065172328	125 mm, gr.80	1/50	pack
S065172330	125 mm, gr.120	1/50	pack
S065172332	125 mm, gr.180	1/50	pack
S065172334	125 mm, gr.240	1/50	pack
S065172336	125 mm, gr.320	1/50	pack
S065172338	150 mm, gr.80	1/50	pack
S065172340	150 mm, gr.120	1/50	pack
S065172342	150 mm, gr.180	1/50	pack
S065172344	150 mm, gr.240	1/50	pack
S065172346	150 mm, gr.320	1/50	pack
S065172348	225 mm, gr.80	1/30	pack
S065172350	225 mm, gr.120	1/30	pack
S065172352	225 mm, gr.180	1/30	pack
S065172354	225 mm, gr.240	1/30	pack


Angle sanding block



- 4 abrasive surfaces
- very high-quality coating
- extremely flexible
- for wet and dry work

S-71280	G36	1/100	pc
S-71281	G60	1/100	pc
S-71282	G80	1/100	pc
S-71283	G100	1/100	pc
S-71284	G120	1/100	pc
S-71285	G150	1/100	pc
S-71286	G180	1/100	pc
S-71287	G220	1/100	pc

Sanding block



- 4 abrasive surfaces
- high quality of the fill
- very flexible
- for wet and dry work

S-71259	G36	1/100	pc
S-71260	G60	1/100	pc
S-71261	G80	1/100	pc
S-71262	G100	1/100	pc
S-71263	G120	1/100	pc
S-71264	G150	1/100	pc
S-71265	G180	1/100	pc
S-71266	G220	1/100	pc

Saw blades and milling cutters

Jig saw blade



- aggressive tooth shape reduces vibration and increases cutting speed
- HSS – for cutting metal, aluminum, non-ferrous metals
- HCS – for cutting wood, beaverboard, plastics

S-71982	4.0 x 100 mm	1/10/100	set
S-71984	2.4 - 5.0 x 132 mm	1/10/100	set
S-71986	1.2 - 2.6 x 100 mm	1/10/100	set

Jig saw blade



- aggressive tooth shape results in less vibration and higher cutting speed of the material
- HCS (carbon steel) - for cutting wood, fibreboards, plastics
- HSS (hardened high speed steel) - for cutting metal, aluminum, non-ferrous metals

S-71708	2.7 x 74 mm	1/10/100	set
S-71710	4.0 - 5.2 x 74 mm	1/10/100	set
S-71711	2.5 x 74 mm	1/10/100	set
S-71713	3.0 x 74 mm	1/10/100	set
S-71719	2.0 x 56 mm	1/10/50	set
S-71721	4.0 - 5.2 x 74 mm	1/10/100	set
S-71724	4.0 x 125 mm	1/10/100	set
S-71725	2.0 - 3.0 x 74 mm	1/10/50	set
S-71727	3.0 x 91 mm	1/10/50	set
S-71731	1.1 - 1.5 x 67 mm	1/10/100	set
S-71733	1.9 - 2.3 x 67 mm	1/10/100	set

Reciprocating saw blade



- aggressive tooth shape reduces vibration and increases cutting speed
- HSS – for cutting metal, aluminum, non-ferrous metals
- HCS – for cutting wood, beaverboard, plastics

S-71994	4.3 x 150 mm	1/5/50	set

Reciprocating saw blade



- aggressive tooth shape reduces vibration and increases cutting speed
- HSS – for cutting metal, aluminum, non-ferrous metals
- HCS – for cutting wood, beaverboard, plastics

S-71992	1.5 x 240 mm	1/5/50	set

Reciprocating saw blade



- aggressive tooth shape reduces vibration and increases cutting speed
- HSS – for cutting metal, aluminum, non-ferrous metals
- HCS – for cutting wood, beaverboard, plastics

S-71988	1.8-2.6 x 150 mm	1/5/50	set

Reciprocating saw blade



- aggressive tooth shape reduces vibration and increases cutting speed
- HSS – for cutting metal, aluminum, non-ferrous metals
- HCS – for cutting wood, beaverboard, plastics

S-71993	1.4 x 150 mm	1/5/50	set

Reciprocating saw blade



- aggressive tooth shape reduces vibration and increases cutting speed
- HSS – for cutting metal, aluminum, non-ferrous metals
- HCS – for cutting wood, beaverboard, plastics

S-71990	2.0 x 200 mm	1/5/50	set
S-71996	1.8-3.2 x 150 mm	1/5/50	set

Reciprocating saw blade



- aggressive tooth shape reduces vibration and increases cutting speed
- HM – for cutting porotherm

S-71997	240 x 23 x 1.5 mm	1/5/50	pc
S-71998	305 x 50 x 1.5 mm	1/5/50	pc
S-71999	455 x 50 x 1.5 mm	1/5/50	pc

HCS wood blade AII 65 APC

STARLOCK



Application:
- softwood
- chipboard
- wood with metal
- non-ferrous metals

S066472229	65 x 40 mm	1/25	pc

HCS wood blade AIZ 32 EPC

STARLOCK



Application:
- softwood
- chipboard
- plastics

S066472220	32 x 50 mm	1/20	pc

BIM metal/wood blade AII 65 APB

STARLOCK



Application:
- steel sheets
- HPL laminates
- wood with metal

S066472232	65 x 40 mm	1/25	pc

BIM metal/wood blade AIZ 32 APB

STARLOCK



Application:
- softwood
- chipboard
- wood with metal
- non-ferrous metals

S066472223	32 x 50 mm	1/20	pc

HCS wood blade AII 65 BSPC

STARLOCK



Application:
- hardwood
- solid wood furniture boards
- plastic-coated boards

S066472235	65 x 40 mm	1/25	pc

HCS wood blade AIZ 32 BSPC

STARLOCK



Application:
- hardwood
- solid wood furniture boards
- plastic-coated boards

S066472226	32 x 50 mm	1/20	pc

BIM metal blade AIZ 20 AB

STARLOCK



Application:
- steel sheets
- HPL laminates
- wood with metal

S066472241	20 x 30 mm	1/20	pc

BIM metal blade AIZ 32 AB

STARLOCK



Application:
- non-ferrous metals
- aluminium
- gypsum boards
- gypsum board profiles

S066472244	32 x 50 mm	1/20	pc

CARBIDE metal blade AIZ 32 AT

STARLOCK



Application:
- steel
- stainless steel
- gypsum board profiles
- fibre-cement board

S066472250	32 x 40 mm	1/20	pc

BIM metal/wood blade ACZ 85 EB

STARLOCK



Application:
- steel
- steel sheets
- aluminium
- plastics

S066472253	85 mm	1/25	pc

CARBIDE-RIFF grout/abrasive materials blade ACZ 85 RT3

STARLOCK



Application:
- grout, adhesives, mortars
- soft tiles, grout
- aerated concrete
- gypsum boards

S066472265	85 mm	1/25	pc

CARBIDE-RIFF grout/abrasive materials blade AIZ 32 RT5

STARLOCK




Application:
- grout, adhesives, mortars
- soft tiles, grout
- aerated concrete
- gypsum boards

S066472271	32 mm	1/20	pc

DELTA CARBIDE-RIFF-MULTI STARLOCK sanding plate AVZ 78 RT2

STARLOCK

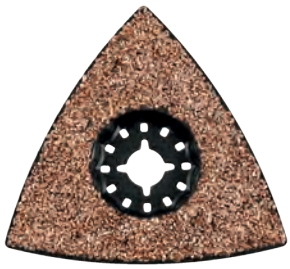


Application:
- hardwood
- grout, adhesives, mortars
- concrete, concrete mortars
- fibre-cement board

S066472274	78 mm	1/25	pc

DELTA CARBIDE-RIFF-MULTI STARLOCK sanding plate AVZ 78 RT2

STARLOCK

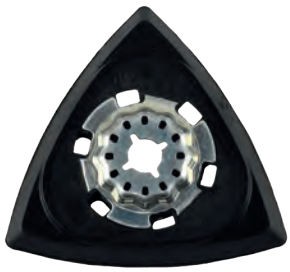

- for oscillating multi-tools
- for sanding corners
- easier access when sanding corners
- ensures optimal power transfer and convenient blade change within 3 seconds

S066472277	78 mm	1/25	pc

Stirrers

Paint mixer



- paint mixer type A
- amount of mixture: 15-25 kg (for mixer type A2: 5-15 kg)
- for mixing liquid materials: acrylic, emulsion, dispersion paints, varnishes, stains

S-73802	HEX 8 mm ; A2 ; 80 mm	1/10	pc
S-73804	HEX 8 mm ; A3 ; 100 mm	1/10	pc

Gypsum mixer



- plaster mixer type E
- amount of mixture: 10-15 kg
- for mixing bulk materials that require quick preparation: gypsum, finishing coats, gypsum plasters

S-73814	HEX 8 mm ; E1 ; 80 mm	1/8	pc

Adhesive and plaster mixer



- heavy mortar mixer type C
- amount of mixture: 16-35 kg
- for mixing heavy and dense materials: structural plaster, mortar, concrete, tile adhesive

S-73818	SDS plus ; C3 ; 120 mm ; 16-35 kg	1/10	pc

Adhesive and plaster mixer



- heavy mortar mixer type C
- amount of mixture: up to 10 kg (for mixer type C2: 10-20 kg)
- for mixing heavy and dense materials: structural plaster, mortar, concrete, tile adhesive

S-73808	HEX 8 mm ; C1 ; 80 mm	1/10	pc
S-73810	HEX 8 mm ; C2 ; 100 mm	1/10	pc

Heavy duty mortar mixer



- slow mixer for heavy mortar Type Y
- for mixing heavy and dense materials: structural plaster, masonry mortar, concrete, tile adhesive, adhesive for thermal insulation
- the shape of the blades allows for an increase in the quantity of mixed material

S-73819	M14 ; type Y ; 140 cm ; 20-50 kg	1/6	pc
S-73821	M14 ; type Y ; 160 cm ; 20-60 kg	1/6	pc

Adhesive and plaster mixer



- heavy mortar mixer type C
- amount of mixture: 16-35 kg
- for mixing heavy and dense materials: structural plaster, mortar, concrete, tile adhesive

S-73812	HEX 10 mm ; C3 ; 120 mm	1/10	pc

Adhesive and plaster mixer



- heavy mortar mixer type C
- amount of mixture: 16-35 kg
- for mixing heavy and dense materials: structural plaster, mortar, concrete, tile adhesive

S-73820	M14 ; C3 ; 120 mm	1/10	pc

Adhesive and plaster mixer



- heavy mortar mixer type D
- amount of mixture: 10-30 kg
- for mixing heavy and dense materials: structural plaster, mortar, concrete, tile adhesive

S-73816	HEX 8 mm ; D1 ; 80 mm	1/10	pc
S-73817	SDS plus ; C3 ; 100 mm ; 10-20 kg	1/10	pc

mixer for plaster



- used for mixing heavy and dense mixtures: cement mortars, plasters, floors, plasters, paints, adhesives etc.
- ensures quick and efficient mixing without the formation of air bubbles in the mixture

S030973805	HEX : 120 mm	1/2	pc
S030973806	M14 : 135 mm	1/3	pc
S030973807	M14 : 180 mm	1/4	pc

STALCO



FASTENING SYSTEMS

General fasteners

Metal hammer drive anchor KSMM



- Material: ZnAl alloy expansion sleeve, steel nail, electro-galvanised
- Application: For multi-point fixings in plain, reinforced or unreinforced, cracked or non-cracked concrete substrates

	mm	mm	mm	mm		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
KSMM06040	3,8	47,8	6	43	-	6	-	25	100	1800	-
KSMM06050	3,8	59	6	53,8	-	6	-	25	100	1200	-
KSMM06065	3,8	72,8	6	68,8	-	6	-	25	100	1200	-

Hardened frame screw WO



- Material: hardened galvanized steel screw
- Purpose: for construction materials such as: concrete, natural stone, solid brick, hollow brick, perforated brick

	mm	mm	mm	mm		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
WO052	7,5	52	-	-	T30	-	12	40*	200	2400	-
WO072	7,5	72	-	-	T30	-	32	40*	100	1200	-
WO092	7,5	92	-	-	T30	-	52	40*	100	1200	-
WO112	7,5	112	-	-	T30	-	72	40*	100	1200	-
WO132	7,5	132	-	-	T30	-	92	40*	100	1200	-
WO152	7,5	152	-	-	T30	-	112	40*	100	900	-
WO182	7,5	182	-	-	T30	-	142	40*	100	900	-
WO202	7,5	202	-	-	T30	-	162	40*	100	600	-


Fixing anchor for windows KMO



- Material: galvanized carbon steel
- Purpose: for mounting wooden and PVC windows

	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
KMO	165x25	1,5	100	900	-

Expansion plug for fixing stair treads KMS

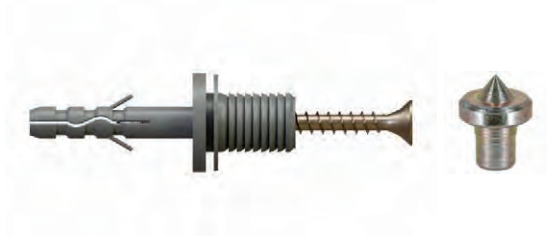

- Material: polypropylene dowel, galvanized steel screw
- Purpose: connector for fixing stair steps, wood-like panels, wooden elements at least 30 mm thick in solid materials; ensures quick and simple installation, and the special mounting structure prevents the stairs from creaking while walking

	mm	mm	mm	mm		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
KMS	5	60	8	-	PZ 2	8	-	40	20	360	-
ZNACZNIK	-	-	14	-	-	-	-	-	4	1000	-

Hanger bolt DW



- Material: double-threaded bolt, galvanized steel
- Purpose: for joining wooden elements with other fasteners, e.g. nuts, dowels with metric thread, it is also a component of sanitary fixings

	mm	mm	mm	mm	⬡/⊕	mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
DW08060	8	60	-	-	6 / T25	-	-	-	100	1200	-
DW08080	8	80	-	-	6 / T25	-	-	-	100	1200	-
DW08100	8	100	-	-	6 / T25	-	-	-	100	1200	-
DW08120	8	120	-	-	6 / T25	-	-	-	100	1200	-
DW08140	8	140	-	-	6 / T25	-	-	-	100	1200	-
DW08160	8	160	-	-	6 / T25	-	-	-	100	900	-
DW08180	8	180	-	-	6 / T25	-	-	-	50	450	-
DW08200	8	200	-	-	6 / T25	-	-	-	50	450	-
DW08250	8	250	-	-	6 / T25	-	-	-	50	300	-
DW08300	8	300	-	-	6 / T25	-	-	-	50	-	-
DW10080	10	80	-	-	6 / T25	-	-	-	50	600	-
DW10100	10	100	-	-	6 / T25	-	-	-	50	600	-
DW10120	10	120	-	-	6 / T25	-	-	-	50	600	-
DW10140	10	140	-	-	6 / T25	-	-	-	50	600	-
DW10160	10	160	-	-	6 / T25	-	-	-	50	450	-
DW10200	10	200	-	-	6 / T25	-	-	-	50	-	-
DW10250	10	250	-	-	6 / T25	-	-	-	50	-	-
DW10300	10	300	-	-	6 / T25	-	-	-	50	-	-

Expansion plug sleeve for solid materials KA



- Material: polypropylene copolymer sleeve
- Purpose: for fixing in substrates made of solid building materials such as: plain concrete, ceramic solid brick, silicate solid brick, autoclaved cellular concrete

	mm	mm	mm	mm	⬡/⊕	mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
KA06030	3,5-4	-	6	30	-	6	-	-	1000	6000	-
KA08040	4-5	-	8	40	-	8	-	-	500	3000	-
KA10050	5-6	-	10	50	-	10	-	-	300	1800	-
KA12060	6-8	-	12	60	-	12	-	-	150	900	-
KA12080	8	-	12	80	-	12	-	-	100	600	-
KA14080	10	-	14	80	-	14	-	-	100	600	-
KA16100	12	-	16	100	-	16	-	-	50	300	-

Nylon expansion plug sleeve for solid materials KAN

NYLON



- Material: polyamide dowel

	mm	mm	mm	mm	⬡/⊕	mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
KAN14080	10	-	14	80	-	14	-	-	50	600	-

Universal expansion plug sleeve KUP

NYLON



- Material: polyamide sleeve
- Intended use: for fixing of elements in substrates made of normal concrete, ceramic solid bricks, silicate solid bricks, expanded clay hollow bricks (with holes), hollow silicate hollow bricks, autoclaved cellular concrete, gypsum cardboard panels with a thickness of up to 12.50 mm

	mm	mm	mm	mm	⬡/⊕	mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
KUP06035	3,5	-	6	35	-	6	-	-	200	3600	-
KUP08050	4,5	-	8	50	-	8	-	-	200	1800	-
KUP10060	5	-	10	60	-	10	-	-	100	1200	-

Expansion plug with screw with countersunk head R



- Material: polypropylene sleeve, steel screw, electro-galvanised
- Purpose: for multipoint fixings in substrates of: normal concrete, ceramic solid brick, silicate solid brick, autoclaved cellular concrete

	mm	mm	mm	mm		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
R0635030	3,5	30	6	30	PZ 2	6	-	30	200	3600	-
R0635035	3,5	35	6	30	PZ 2	6	5	30	200	3600	-
R0635040	3,5	40	6	30	PZ 2	6	10	30	200	3600	-
R0635050	3,5	50	6	30	PZ 2	6	20	30	200	3600	-
R0840040	4	40	8	40	PZ 2	8	-	40	100	1800	-
R0840045	4	45	8	40	PZ 2	8	5	40	100	1800	-
R0840050	4	50	8	40	PZ 2	8	10	40	100	1800	-
R0840060	4	60	8	40	PZ 2	8	20	40	100	1800	-
R0850050	5	50	8	40	PZ 2	8	10	40	100	1200	-
R0850060	5	60	8	40	PZ 2	8	20	40	100	1200	-
R0850070	5	70	8	40	PZ 2	8	30	40	100	1200	-
R0850080	5	80	8	40	PZ 2	8	40	40	100	1200	-
R0850100	5	100	8	40	PZ 2	8	60	40	100	1200	-
R1050050	5	50	10	50	PZ 2	10	-	50	100	1200	-
R1050060	5	60	10	50	PZ 2	10	10	50	100	1200	-
R1050070	5	70	10	50	PZ 2	10	20	50	100	1200	-
R1050080	5	80	10	50	PZ 2	10	30	50	100	1200	-
R1050100	5	100	10	50	PZ 2	10	50	50	100	900	-
R1060060	6	60	10	50	PZ 3	10	10	50	100	900	-
R1060070	6	70	10	50	PZ 3	10	20	50	100	900	-
R1060080	6	80	10	50	PZ 3	10	30	50	100	900	-
R1060100	6	100	10	50	PZ 3	10	50	50	100	600	-
R1060120	6	120	10	50	PZ 3	10	70	50	100	600	-
R1260060	6	60	12	60	PZ 3	12	-	60	100	600	-
R1260070	6	70	12	60	PZ 3	12	10	60	100	600	-
R1260080	6	80	12	60	PZ 3	12	20	60	100	600	-
R1260100	6	100	12	60	PZ 3	12	40	60	100	600	-
R1260120	6	120	12	60	PZ 3	12	60	60	100	600	-

Universal expansion plug with countersunk head screw KU



- Material: polyamide sleeve, steel screw, electro-galvanised
- Purpose: for multipoint fixings in substrates made of: normal concrete, solid ceramic bricks, solid calcium-silicate bricks, expanded clay hollow bricks (with holes), hollow silicate bricks (with holes), autoclaved aerated concrete

	mm	mm	mm	mm		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
KU0635045	3,5	45	6	35	PZ 2	6	10	35	100	1800	-
KU0635060	3,5	60	6	35	PZ 2	6	25	35	100	1800	-
KU0845060	4,5	60	8	50	PZ 2	8	10	50	100	1200	-
KU0845080	4,5	80	8	50	PZ 2	8	30	50	100	1200	-
KU1050080	5	80	10	60	PZ 2	10	20	60	50	600	-
KU1050100	5	100	10	60	PZ 2	10	40	60	50	600	-

Expansion plug with hex head screw K



- Material: polypropylene sleeve, steel screw, electro-galvanised
- Purpose: for multipoint fixings in substrates of: normal concrete, ceramic solid brick, silicate solid brick, autoclaved cellular concrete

	mm	mm	mm	mm		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
K10060	6	60	10	50	10	10	10	50	100	600	-
K10070	6	70	10	50	10	10	20	50	100	600	-
K10080	6	80	10	50	10	10	30	50	100	600	-
K10090	6	90	10	50	10	10	40	50	100	600	-
K10100	6	100	10	50	10	10	50	50	100	600	-
K10120	6	120	10	50	10	10	70	50	100	600	-
K12060	8	60	12	60	13	12	-	60	100	600	-
K12070	8	70	12	60	13	12	10	60	50	450	-
K12080	8	80	12	60	13	12	20	60	50	450	-
K12090	8	90	12	60	13	12	30	60	50	450	-
K12100	8	100	12	80	13	12	20	80	50	300	-
K12120	8	120	12	80	13	12	40	80	50	300	-
K12140	8	140	12	80	13	12	60	80	50	300	-
K12160	8	160	12	80	13	12	80	80	50	300	-
K12180	8	180	12	80	13	12	100	80	50	300	-
K12200	8	200	12	80	13	12	120	80	50	300	-
K14080	10	80	14	80	17	14	-	80	50	300	-
K14100	10	100	14	80	17	14	20	80	25	225	-
K14120	10	120	14	80	17	14	40	80	25	225	-
K14140	10	140	14	80	17	14	60	80	25	225	-
K14160	10	160	14	80	17	14	80	80	25	225	-
K14180	10	180	14	80	17	14	100	80	25	225	-
K14200	10	200	14	80	17	14	120	80	25	150	-

Expansion plug with straight hook KHP



- Material: polyethylene dowel, steel electro-galvanized screw with straight hook
- Purpose: for solid building materials such as: plain concrete C20/25, solid ceramic brick class 15, solid silicate brick class 15

	mm	mm	mm	mm		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
KHP06	4	40	6	30	-	6	-	30	200	3600	-
KHP08	5	45	8	40	-	8	-	40	100	1800	-
KHP10	6	54	10	50	-	10	-	50	100	1200	-
KHP10L	6	75	10	50	-	10	-	50	100	900	-
KHP12	6,5	65	12	60	-	12	-	60	100	600	-
KHP12L	8	100	12	80	-	12	-	80	50	450	-

Universal expansion plug with straight hook KUHP



- Material: polyamide sleeve, steel screw with straight hook, electro-galvanised
- Purpose: for multipoint fixings in substrates made of: normal concrete, ceramic solid brick, silicate solid brick, expanded clay hollow brick (with holes), autoclaved cellular concrete

	mm	mm	mm	mm		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
KUHP06048	3,5	45	6	35	-	-	-	35	50	600	-
KUHP08065	4,5	65	8	50	-	-	-	50	25	300	-

Expansion plug with ceiling hook KHS



- Material: polypropylene sleeve, steel screw with ceiling hook, galvanised
- Purpose: for multipoint fixings in substrates of: normal concrete, ceramic solid brick, silicate solid brick, autoclaved cellular concrete

	mm	mm	mm	mm	⬡/⊕	mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
KHS06	4	35	6	30	-	6	-	30	100	1800	-
KHS08	5	42	8	40	-	8	-	40	100	1200	-
KHS10	6	52	10	50	-	10	-	50	100	900	-
KHS12	7	62	12	60	-	12	-	60	50	450	-

Universal expansion plug with ceiling hook KUHS

NYLON



- Material: polyamide dowel, galvanized steel screw with straight hook
- Purpose: for mounting elements in plasterboard up to 12.50 mm thick and in ceramic Porotherm bricks class 15

	mm	mm	mm	mm	⬡/⊕	mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
KUHS06065	3,5	65	6	35	-	-	-	35	50	600	-
KUHS08083	4,5	83	8	50	-	-	-	50	25	300	-

Expansion plug with eye hook KHOO



- Material: polypropylene sleeve, steel screw with ceiling hook, galvanised
- Purpose: for multipoint fixings in substrates of: normal concrete, ceramic solid brick, silicate solid brick, autoclaved cellular concrete

	mm	mm	mm	mm	⬡/⊕	mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
KHOO12	8	90	12	80	-	12	-	80	30	180	-

Expansion plug with closed eye hook KHOZ

NYLON



- Material: polyamide sleeve, steel screw with eye-hook (welded), zinc-plated
- Purpose: for multipoint fixings in substrates of: normal concrete, ceramic solid brick, silicate solid brick, autoclaved cellular concrete

	mm	mm	mm	mm	⬡/⊕	mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
KHOZ14120	10	120	14	80	-	14	-	80	20	40	-
KHOZ14160	10	160	14	80	-	14	-	80	20	40	-
KHOZ14190	10	190	14	80	-	14	-	80	20	40	-
KHOZ14230	10	230	14	80	-	14	-	80	20	40	-
KHOZ14300	10	300	14	80	-	14	-	80	10	40	-

Eye hook cap ZKHO



- Material: polypropylene

	mm	mm	mm	mm		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
ZKHO	-	-	14	80	-	-	-	-	50	600	-

Eye Hook with thread HO



- Material: steel screw with a hook (welded), electro-galvanized

	mm	mm	mm	mm		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
HO10120	10	120	-	-	-	-	-	-	25	225	-
HO10160	10	160	-	-	-	-	-	-	25	150	-
HO10190	10	190	-	-	-	-	-	-	25	150	-
HO10230	10	230	-	-	-	-	-	-	25	100	-
HO10300	10	300	-	-	-	-	-	-	25	100	-
HO12160	12	160	-	-	-	-	-	-	25	150	-
HO12190	12	190	-	-	-	-	-	-	25	150	-
HO12230	12	230	-	-	-	-	-	-	25	100	-
HO12300	12	300	-	-	-	-	-	-	25	100	-
HO12350	12	350	-	-	-	-	-	-	25	100	-
HO12400	12	400	-	-	-	-	-	-	25	100	-

Expansion plug sleeve for G-K OLAKA

NYLON



- Material: polyethylene dowel
- Purpose: for mounting light elements on gypsum boards with a thickness of up to 12.50 mm

	mm	mm	mm	mm		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
OLAKA	3,5	-	8	35	-	10	-	-	200	1200	-

OLA plug with screw OLAWK

NYLON



- Material: polyamide dowel, electro-galvanized steel screw
- Purpose: for mounting light elements on plasterboards with a thickness of up to 12.50 mm

	mm	mm	mm	mm		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
OLAWK	3,5	60	8	35	PZ 2	10	-	-	100	900	-

OLA plug with angle hook OLAHP

NYLON



- Material: polyamide dowel, electro-galvanized steel screw with straight hook
- Purpose: for mounting light elements on plasterboards with a thickness of up to 12.50 mm

	mm	mm	mm	mm		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
OLAHP	3,5	62	8	35	-	10	-	-	100	900	-

OLA plug with roung hook OLAHS

NYLON



- Material: polyamide dowel, electro-galvanized steel screw with ceiling hook
- Purpose: for mounting light elements on plasterboards with a thickness of up to 12.50 mm

	mm	mm	mm	mm		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
OLAHS	3,5	62	8	35	-	10	-	-	100	900	-

MOLLY metal cavity anchor with screw



- Material: dowel made of galvanized steel sheet, steel screw, galvanized with metric thread
- Purpose: for mounting light elements in plasterboard and chipboard

	mm	mm	mm	mm		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
MOL08425	M4	25	8	19	SL / PH2	8	3-5	-	100	1800	-
MOL08438	M4	38	8	32	SL / PH2	8	5-12	-	100	1800	-
MOL08445	M4	45	8	38	SL / PH2	8	10-19	-	100	1800	-
MOL08452	M4	52	8	45	SL / PH2	8	18-22	-	100	1800	-
MOL08465	M4	65	8	54	SL / PH2	8	18-35	-	100	1800	-
MOL10545	M5	45	10	37	SL / PH2	10	5-15	-	100	1800	-
MOL10558	M5	58	10	52	SL / PH2	10	9-20	-	50	900	-
MOL10571	M5	71	10	65	SL / PH2	10	12-30	-	50	900	-
MOL12645	M6	45	12	37	SL / PH2	12	5-15	-	50	900	-
MOL12658	M6	58	12	52	SL / PH2	12	7-20	-	50	600	-
MOL12671	M6	71	12	65	SL / PH2	12	24-32	-	50	600	-

MOLLY metal cavity anchor with screw with straight hook



- Material: dowel made of galvanized steel sheet; galvanized steel screw with metric thread and straight hook
- Purpose: for mounting light elements in plasterboard and chipboard

	mm	mm	mm	mm		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
MOLP08438	M4	55	8	32	-	8	5-12	-	100	1800	-

MOLLY metal cavity anchor with screw with ceiling hook



- Material: dowel made of galvanized steel sheet; galvanized steel screw with metric thread and ceiling hook
- Purpose: for mounting light elements in plasterboard and chipboard

	mm	mm	mm	mm		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
MOLS08438	M4	67	8	32	-	8	5-12	-	100	1800	-


Molly forceps



- „Molly" steel dowel pliers

		mm	pcs per box	pcs per masterbox	pcs per pallet
S-14001	M4 - M6	-	1	12	-


Spring toggle anchor for hollow walls with screw PARW

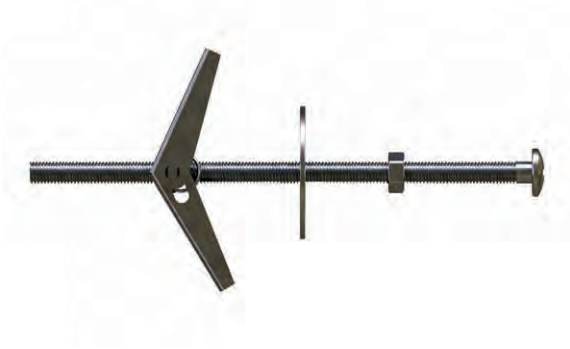

- Material: galvanized steel sheet, galvanized steel bolt with metric thread
- Purpose: for mounting elements in chipboard

	mm	mm	mm	mm		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
PARW4050	M4	50	-	-	SL/PZ 2	14	15	-	50	600	-
PARW4075	M4	75	-	-	SL/PZ 2	14	40	-	50	450	-

Spring toggle anchor for hollow walls with ceiling hook PARS

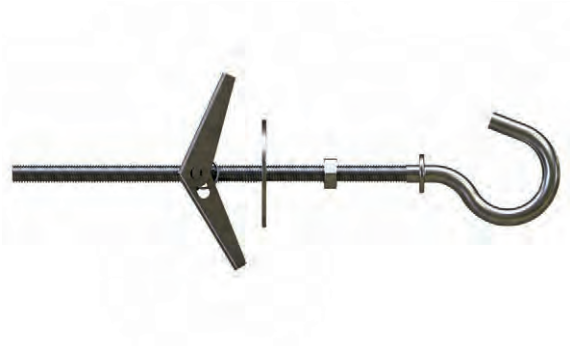

- Material: galvanized steel sheet, galvanized steel bolt with metric thread and ceiling hook
- Purpose: for mounting elements in chipboard

	mm	mm	mm	mm		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
PARS4075	M4	75	-	-	-	14	-	-	50	450	-

Metal plug for aerated concrete KG



- Material: zinc-plated carbon steel
- Purpose: for fixing in autoclaved aerated concrete substrates of min. 2 and a density of min. 350 kg/m3

	mm	mm	mm	mm		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
KG0632	5 ÷ 6	≥35	6	32	-	-	-	32	200	3600	-
KG0838	6 ÷ 8	≥45	8	38	-	-	-	38	100	1800	-
KG0860	6 ÷ 8	≥70	8	60	-	-	-	60	50	900	-
KG1060	8 ÷ 10	≥70	10	60	-	-	-	60	50	900	-

Insulation fasteners

Insulation fixing plug with metal pin KIM



- Material polyethylene dowel, steel pin, galvanized, with hex head
- Purpose: for the installation of thermal insulation to building materials such as: plain concrete C20/C25, solid ceramic brick class 15, ceramic hollow brick class 15, cellular concrete type 600

	mm	mm	mm	mm		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
KIM10080	5,4	88	10	80	-	10	ABCD 30 ; E 20	ABCD 40 ; E 50	200	-	21000
KIM10100	5,4	108	10	100	-	10	ABCD 50 ; E 40	ABCD 40 ; E 50	200	-	21000
KIM10120	5,4	128	10	120	-	10	ABCD 70 ; E 60	ABCD 40 ; E 50	200	-	11200
KIM10140	5,4	148	10	140	-	10	ABCD 90 ; E 80	ABCD 40 ; E 50	200	-	11200
KIM10160	5,4	168	10	160	-	10	ABCD 110 ; E 100	ABCD 40 ; E 50	200	-	11200
KIM10180	5,4	188	10	180	-	10	ABCD 130 ; E 120	ABCD 40 ; E 50	200	-	11200
KIM10200	5,4	208	10	200	-	10	ABCD 150 ; E 140	ABCD 40 ; E 50	200	-	9600
KIM10220	5,4	228	10	220	-	10	ABCD 170 ; E 160	ABCD 40 ; E 50	200	-	9600

Insulation fixing plug with polyamide pin KI



- Material: polyethylene sleeve, glass fibre reinforced polyamide stem
- Application: for installation of thermal insulation in substrates made of: normal concrete, solid ceramic bricks, solid calcium-silicate bricks, expanded clay hollow bricks (with holes), hollow silicate hollow bricks (with holes), autoclaved aerated concrete, aggregate concrete elements

	mm	mm	mm	mm		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
KI10080	5,5	88	10	80	-	10	ABCD 30 ; E 20	ABCD 40 ; E 50	200	-	21000
KI10100	5,5	108	10	100	-	10	ABCD 50 ; E 40	ABCD 40 ; E 50	200	-	21000
KI10120	5,5	128	10	120	-	10	ABCD 70 ; E 60	ABCD 40 ; E 50	200	-	11200
KI10140	5,5	148	10	140	-	10	ABCD 90 ; E 80	ABCD 40 ; E 50	200	-	11200
KI10160	5,5	168	10	160	-	10	ABCD 110 ; E 100	ABCD 40 ; E 50	200	-	11200
KI10180	5,5	188	10	180	-	10	ABCD 130 ; E 120	ABCD 40 ; E 50	200	-	11200
KI10200	5,5	208	10	200	-	10	ABCD 150 ; E 140	ABCD 40 ; E 50	200	-	9600
KI10220	5,5	228	10	220	-	10	ABCD 170 ; E 160	ABCD 40 ; E 50	200	-	9600

Styrofoam router bit FDS



- Material: Diameter: 67 mm
- handle: hex 8 mm
- milling depth: 20 mm
- made of plastic

		mm	pcs per box	pcs per masterbox	pcs per pallet
FDS	Ø67 x 20 mm	HEX 8	1	20	-

Thermal insulation cap 67 mm white ZTB



- Material: polystyrene foam
- Purpose: prevents the formation of thermal bridges in the places of mechanical fastening of polystyrene foam

		mm	pcs per box	pcs per masterbox	pcs per pallet
ZTB67	Ø67 x 16,5 mm	-	100	-	15000
ZTS67	Ø67 x 16,5 mm	-	100	-	15000


Mineral wool thermal insulation cap ZTM



- Material: mineral wool
- Purpose: to prevent heat transfer at the point of application of the insulation dowels and to fill the installation cavity after cutting mineral wool.

		mm	pcs per box	pcs per masterbox	pcs per pallet
ZTM	Ø67 x 20 mm	-	100	-	10000


Pressure flange for fastening the insulation TD



- Material: polypropylene copolymer
- Purpose: for mechanical installation of thermal insulation (polystyrene foam and lamella wool)

		mm	pcs per box	pcs per masterbox	pcs per pallet
TD060	Ø6,2 / 60 mm	-	150	-	33750

Pressure flange for fastening the insulation TD



		mm	pcs per box	pcs per masterbox	pcs per pallet
TD140	Ø10,5 / 140 mm	-	100	-	10500

Insulation plug for styrofoam KS



- Material: polystyrene
- Purpose: to make fix decorative elements direct in polystyrene foam – lamps, building numbers, etc.

	mm	mm	mm	mm		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
KS52	4,0-4,2	≥52	27	52	T40	-	-	-	20	360	-
KS82	4,2-4,5	≥82	27	82	T40	-	-	-	20	240	-
KS142	5	≥142	27	142	T40	-	-	-	10	120	-

Fiberglass reinforcing mesh



- Material: fibreglass
- manufactured in accordance with ETAG004
- mesh 4.7x40 mm

		mm	pcs per box [m²]	pcs per masterbox [m²]	pcs per pallet [m²]
S-38145	1 x 50 m; 145 g/m2	-	50	-	1650

Metal pressure puck KD



- Material: electro-galvanized steel sheet
- Purpose: for roof insulation

		mm	pcs per box	pcs per masterbox	pcs per pallet
KD40	Ø40	-	100	1800	-

Fasteners for medium and heavy duty applications

Wedge expansion anchor LSB zinc plated



- Material: dowel, pin, cone, washer, nut made of galvanized steel
- Purpose: for solid materials such as: plain concrete C20/24

	mm	mm	mm	mm		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
LSB08060	-	-	8	60	13	8	3*	35**	100	600	-
LSB08080	-	-	8	80	13	8	23*	35**	100	600	-
LSB08100	-	-	8	100	13	8	43*	35**	100	600	-
LSB08120	-	-	8	120	13	8	63*	35**	100	500	-
LSB08140	-	-	8	140	13	8	83*	35**	80	320	-
LSB10080	-	-	10	80	17	10	16*	42**	100	400	-
LSB10100	-	-	10	100	17	10	35*	42**	100	300	-
LSB10120	-	-	10	120	17	10	55*	42**	50	300	-
LSB10140	-	-	10	140	17	10	75*	42**	50	300	-
LSB10160	-	-	10	160	17	10	95*	42**	40	240	-
LSB12080	-	-	12	80	19	12	3*	50**	50	300	-
LSB12100	-	-	12	100	19	12	23*	50**	50	200	-
LSB12120	-	-	12	120	19	12	43*	50**	50	200	-
LSB12140	-	-	12	140	19	12	63*	50**	25	150	-
LSB12180	-	-	12	180	19	12	83*	50**	25	150	-
LSB12200	-	-	12	200	19	12	103*	50**	20	120	-
LSB16100	-	-	16	100	24	16	1*	65**	25	150	-
LSB16145	-	-	16	145	24	16	40*	65**	25	100	-
LSB16175	-	-	16	175	24	16	70*	65**	25	100	-
LSB16200	-	-	16	200	24	16	100*	65**	20	80	-

Sleeve anchor LSI with flange nut



- Material: dowel, pin, nut made of galvanized steel
- Purpose: for solid materials such as: plain concrete C20/25, natural stone

	mm	mm	mm	mm		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
LSI08045	M6	-	8	45	10	8	100*	30	100	1000	-
LSI08065	M6	-	8	65	10	8	20	35	50	500	-
LSI08085	M6	-	8	85	10	8	40	35	50	500	-
LSI10050	M8	-	10	50	13	10	1	40	50	500	-
LSI10060	M8	-	10	60	13	10	8	40	50	500	-
LSI10077	M8	-	10	77	13	10	25	40	50	500	-
LSI10100	M8	-	10	100	13	10	48	40	50	500	-
LSI10125	M8	-	10	125	13	10	73	40	50	500	-
LSI12060	M10	-	12	60	15	12	1	50	50	500	-
LSI12075	M10	-	12	75	15	12	11	50	50	500	-
LSI12100	M10	-	12	100	15	12	36	50	25	250	-
LSI12129	M10	-	12	129	15	12	65	50	25	250	-
LSI16111	M12	-	16	111	18	16	33	60	20	200	-
LSI16147	M12	-	16	147	18	16	69	60	20	80	-
LSI20107	M16	-	20	100	24	20	15	70	20	80	-
LSI20150	M16	-	20	150	24	20	58	70	20	80	-

Brass drop in anchor with internal thread TRM



- Material: brass
- Purpose: for solid materials such as: plain concrete C20/25

	mm	mm	mm	mm		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
TRM06	M6	-	8	23	-	8	-	-	50	900	-
TRM08	M8	-	10	28	-	10	-	-	50	900	-
TRM10	M10	-	12	32	-	12	-	-	50	900	-
TRM12	M12	-	16	38	-	16	-	-	20	360	-
TRM14	M14	-	18	43	-	18	-	-	20	360	-
TRM16	M16	-	20	43	-	20	-	-	20	360	-

Steel drop in anchor with intrnal thread TRS



- Material: zinc-plated carbon steel
- Application: For multi-point fixings in normal, reinforced or unreinforced concrete, cracked or non-cracked

	mm	mm	mm	mm		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
TRS06	M6	-	8	25	-	8	-	-	50	900	-
TRS08	M8	-	10	30	-	10	-	-	50	900	-
TRS10	M10	-	12	40	-	12	-	-	50	900	-
TRS12	M12	-	16	50	-	16	-	-	25	450	-
TRS16	M16	-	20	65	-	20	-	-	25	450	-

Threaded rod SBO class 4.8



- Material: structural steel grade 4.8, galvanized

	mm	mm	mm	mm		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
SBO061000	M6	1000	-	-	-	-	-	-	100	-	-
SBO081000	M8	1000	-	-	-	-	-	-	50	-	-
SBO101000	M10	1000	-	-	-	-	-	-	25	-	-
SBO121000	M12	1000	-	-	-	-	-	-	20	-	-
SBO141000	M14	1000	-	-	-	-	-	-	20	-	-
SBO161000	M16	1000	-	-	-	-	-	-	10	-	-
SBO201000	M20	1000	-	-	-	-	-	-	5	-	-
SBO241000	M24	1000	-	-	-	-	-	-	5	-	-
SBO062000	M6	2000	-	-	-	-	-	-	50	-	-
SBO082000	M8	2000	-	-	-	-	-	-	25	-	-
SBO102000	M10	2000	-	-	-	-	-	-	25	-	-
SBO122000	M12	2000	-	-	-	-	-	-	20	-	-
SBO162000	M16	2000	-	-	-	-	-	-	10	-	-
SBO202000	M20	2000	-	-	-	-	-	-	5	-	-

Threaded rod SBO class 8.8



- Material: structural steel grade 8.8, galvanized

	mm	mm	mm	mm		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
SBO08100088	M8	1000	-	-	-	-	-	-	50	-	-
SBO10100088	M10	1000	-	-	-	-	-	-	25	-	-
SBO12100088	M12	1000	-	-	-	-	-	-	20	-	-
SBO16100088	M16	1000	-	-	-	-	-	-	10	-	-

Threaded rod (with label) SBOS class 4.8



- Material: structural steel grade 4.8, galvanized



										pcs per box	pcs per masterbox	pcs per pallet
SBOS061000	M6	1000	-	-	-	-	-	-		-	100	-
SBOS081000	M8	1000	-	-	-	-	-	-		-	50	-
SBOS101000	M10	1000	-	-	-	-	-	-		-	25	-
SBOS121000	M12	1000	-	-	-	-	-	-		-	20	-
SBOS141000	M14	1000	-	-	-	-	-	-		-	20	-
SBOS161000	M16	1000	-	-	-	-	-	-		-	10	-
SBOS201000	M20	1000	-	-	-	-	-	-		-	5	-
SBOS241000	M24	1000	-	-	-	-	-	-		-	5	-
SBOS062000	M6	2000	-	-	-	-	-	-		-	50	-
SBOS082000	M8	2000	-	-	-	-	-	-		-	25	-
SBOS102000	M10	2000	-	-	-	-	-	-		-	25	-
SBOS122000	M12	2000	-	-	-	-	-	-		-	20	-
SBOS162000	M16	2000	-	-	-	-	-	-		-	10	-
SBOS202000	M20	2000	-	-	-	-	-	-		-	5	-

Coupling nut DIN6334 galvanized NZ




- Material: zinc-plated steel
- Purpose: fastening element for threaded rods

		mm	pcs per box	pcs per masterbox	pcs per pallet
NZ0620	M6x20	10	50	900	-
NZ0825	M8x25	13	50	900	-
NZ1030	M10x30	17	50	900	-
NZ1240	M12x40	19	50	600	-
NZ1650	M16x50	24	25	300	-

Hexagon nut DIN934 galvanized NAK

kg



- Material: zinc-plated steel
- Application: For threaded rods and metric bolts

		mm	kg per box	kg per masterbox	kg per pallet
NAK06	M6	10	5	20	-
NAK08	M8	13	5	20	-
NAK10	M10	17	5	20	-
NAK12	M12	19	5	20	-
NAK14	M14	22	5	20	-
NAK16	M16	24	5	20	-
NAK20	M20	30	5	20	-

Washer DIN9021 galvanized POP

kg



- Material: zinc-plated steel
- Application: For threaded rods and metric bolts

		mm	kg per box	kg per masterbox	kg per pallet
POP06	M6	-	5	20	-
POP08	M8	-	5	20	-
POP10	M10	-	5	20	-
POP12	M12	-	5	20	-
POP14	M14	-	5	20	-
POP16	M16	-	5	20	-
POP20	M20	-	5	20	-

Self-drilling screws

Roofing screw FD



- Material: screw and washer made of galvanized steel, EPDM rubber
- Purpose: for fastening steel sheets to wooden substrates

	mm	mm	mm	mm max		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
FD4820OC	4,8	20	-	2,5	8	-	-	OC	250	3000	-
FD48203005	4,8	20	-	2,5	8	-	-		250	3000	-
FD48203009	4,8	20	-	2,5	8	-	-		250	3000	-
FD48203011	4,8	20	-	2,5	8	-	-	RAL3011	250	3000	-
FD48205010	4,8	20	-	2,5	8	-	-	RAL5010	250	3000	-
FD48206020	4,8	20	-	2,5	8	-	-		250	3000	-
FD48207016	4,8	20	-	2,5	8	-	-	RAL7016	250	3000	-
FD48207024	4,8	20	-	2,5	8	-	-		250	3000	-
FD48208004	4,8	20	-	2,5	8	-	-		250	3000	-
FD48208017	4,8	20	-	2,5	8	-	-	RAL8017	250	3000	-
FD48209005	4,8	20	-	2,5	8	-	-		250	3000	-
FD48209006	4,8	20	-	2,5	8	-	-		250	3000	-
FD48209010	4,8	20	-	2,5	8	-	-	RAL9010	250	3000	-
FD4835OC	4,8	35	-	2,5	8	-	-	OC	250	3000	-
FD48351002	4,8	35	-	2,5	8	-	-	RAL1002	250	3000	-
FD48351023	4,8	35	-	2,5	8	-	-	RAL1023	250	3000	-
FD48353000	4,8	35	-	2,5	8	-	-		250	3000	-
FD48353005	4,8	35	-	2,5	8	-	-		250	3000	-
FD48353009	4,8	35	-	2,5	8	-	-		250	3000	-
FD48353011	4,8	35	-	2,5	8	-	-	RAL3011	250	3000	-
FD48355010	4,8	35	-	2,5	8	-	-	RAL5010	250	3000	-
FD48356003	4,8	35	-	2,5	8	-	-		250	3000	-
FD48356005	4,8	35	-	2,5	8	-	-		250	3000	-
FD48356020	4,8	35	-	2,5	8	-	-		250	3000	-
FD48357016	4,8	35	-	2,5	8	-	-	RAL7016	250	3000	-
FD48357024	4,8	35	-	2,5	8	-	-		250	3000	-
FD48357042	4,8	35	-	2,5	8	-	-		250	3000	-
FD48357046	4,8	35	-	2,5	8	-	-		250	3000	-
FD48358004	4,8	35	-	2,5	8	-	-		250	3000	-
FD48358011	4,8	35	-	2,5	8	-	-	RAL8011	250	3000	-
FD48358014	4,8	35	-	2,5	8	-	-	RAL8014	250	3000	-
FD48358017	4,8	35	-	2,5	8	-	-	RAL8017	250	3000	-
FD48358019	4,8	35	-	2,5	8	-	-	RAL8019	250	3000	-
FD48359002	4,8	35	-	2,5	8	-	-		250	3000	-
FD48359005	4,8	35	-	2,5	8	-	-		250	3000	-
FD48359006	4,8	35	-	2,5	8	-	-		250	3000	-
FD48359010	4,8	35	-	2,5	8	-	-	RAL9010	250	3000	-
FD4860OC	4,8	60	-	2,5	8	-	-	OC	100	1800	-
FD48603005	4,8	60	-	2,5	8	-	-		100	1800	-
FD48603009	4,8	60	-	2,5	8	-	-		100	1800	-
FD48603011	4,8	60	-	2,5	8	-	-	RAL3011	100	1800	-
FD48605010	4,8	60	-	2,5	8	-	-	RAL5010	100	1800	-
FD48606020	4,8	60	-	2,5	8	-	-		100	1800	-
FD48607016	4,8	60	-	2,5	8	-	-	RAL7016	100	1800	-
FD48607024	4,8	60	-	2,5	8	-	-		100	1800	-
FD48607046	4,8	60	-	2,5	8	-	-		100	1800	-
FD48608004	4,8	60	-	2,5	8	-	-		100	1800	-
FD48608011	4,8	60	-	2,5	8	-	-	RAL8011	100	1800	-
FD48608017	4,8	60	-	2,5	8	-	-	RAL8017	100	1800	-
FD48608019	4,8	60	-	2,5	8	-	-	RAL8019	100	1800	-
FD48609005	4,8	60	-	2,5	8	-	-		100	1800	-
FD48609010	4,8	60	-	2,5	8	-	-	RAL9010	100	1800	-

Self drilling screw for steel without washer WS



- Material: electro-galvanized steel screw
- Purpose: for fixing sheets, steel elements to load-bearing steel structures

	mm	mm	mm	mm max		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
WS348016	4,8	16	-	3	8	-	-	-	500	9000	-
WS348019	4,8	19	-	3	8	-	-	-	500	9000	-
WS348025	4,8	25	-	3	8	-	-	-	500	6000	-
WS348032	4,8	32	-	3	8	-	-	-	500	6000	-
WS348038	4,8	38	-	3	8	-	-	-	500	6000	-
WS555019	5,5	19	-	5	8	-	-	-	500	6000	-
WS555025	5,5	25	-	5	8	-	-	-	500	6000	-
WS555032	5,5	32	-	5	8	-	-	-	500	6000	-
WS555038	5,5	38	-	5	8	-	-	-	250	3000	-
WS555045	5,5	45	-	5	8	-	-	-	250	3000	-
WS555050	5,5	50	-	5	8	-	-	-	250	3000	-
WS555075	5,5	75	-	5	8	-	-	-	200	2400	-
WS555090	5,5	90	-	5	8	-	-	-	100	1200	-
WS555120	5,5	120	-	5	8	-	-	-	100	1200	-
WS563019	6,3	19	-	5	8	-	-	-	250	3000	-
WS563025	6,3	25	-	5	8	-	-	-	250	3000	-
WS563032	6,3	32	-	5	8	-	-	-	250	3000	-
WS563038	6,3	38	-	5	8	-	-	-	250	3000	-
WS563050	6,3	50	-	5	8	-	-	-	200	2400	-
WS563063	6,3	63	-	5	8	-	-	-	100	1200	-
WS563075	6,3	75	-	5	8	-	-	-	100	1200	-

Self drilling screw for steel with washer WSIMPAX



- Material: screw and washer made of galvanized steel, EPDM rubber
- Purpose: the screw is used for fixing sheets, steel elements to steel structures, for fixing overlapping steel sheets

	mm	mm	mm	mm max		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
WS8IMPAX5524	5,5	24	-	8	8	-	6	-	250	3000	-
WS12IMPAX5532	5,5	32	-	12	8	-	9	-	250	3000	-
WS12IMPAX5538	5,5	38	-	12	8	-	15	-	200	2400	-
WS12IMPAX5550	5,5	50	-	12	8	-	27	-	100	1200	-
WS12IMPAX5567	5,5	67	-	12	8	-	44	-	100	1200	-

Self drilling screw for sandwich panels WSPW



- Material: screw and washer made of galvanized steel, EPDM rubber
- Purpose: self-tapping screw used for fastening composite panels to steel structures (drilling capacity: 12.0 mm)

	mm	mm	mm	mm max		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
WSPW1255105	5,5	105	-	12	8	-	-	-	100	900	-
WSPW1255130	5,5	130	-	12	8	-	-	-	50	600	-
WSPW1255150	5,5	150	-	12	8	-	-	-	50	450	-
WSPW1255185	5,5	185	-	12	8	-	-	-	50	450	-
WSPW1255230	5,5	230	-	12	8	-	-	-	50	300	-
WSPW1255255	5,5	255	-	12	8	-	-	-	50	300	-

Washer EPDM for self drilling screws



- Material: screw and washer made of galvanized steel, EPDM rubber
- Purpose: for sealing the screw connection with the substrate

	mm	mm	mm	mm max		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
EPDM14	4,8	-	-	-	-	-	-	-	500	9000	-
EPDM16	5,5	-	-	-	-	-	-	-	500	9000	-
EPDM19	6,3	-	-	-	-	-	-	-	500	6000	-

Self-drilling screw with wafer head zinc plated WSP



- Material: electro-galvanized steel screw
- Purpose: for steel sheets, steel (drilling capacity 2.0 mm)

	mm	mm	mm	mm max		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
WSP4213	4,2	13	-	2	PH 2	-	-	-	1000	18000	-
WSP4216	4,2	16	-	2	PH 2	-	-	-	1000	18000	-
WSP4219	4,2	19	-	2	PH 2	-	-	-	1000	12000	-
WSP4225	4,2	25	-	2	PH 2	-	-	-	500	9000	-
WSP4232	4,2	32	-	2	PH 2	-	-	-	500	6000	-
WSP4240	4,2	40	-	2	PH 2	-	-	-	400	4800	-
WSP4250	4,2	50	-	2	PH 2	-	-	-	300	3600	-
WSP4275	4,2	75	-	2	PH 2	-	-	-	200	2400	-

Self-drilling screw with wafer head phosphated WSPF



- Material: electro-galvanized steel screw
- Purpose: for steel sheets, steel (drilling capacity 2.0 mm)

	mm	mm	mm	mm max		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
WSPF4213	4,2	13	-	2	PH 2	-	-	-	1000	18000	-
WSPF4216	4,2	16	-	2	PH 2	-	-	-	1000	18000	-
WSPF4219	4,2	19	-	2	PH 2	-	-	-	1000	12000	-
WSPF4225	4,2	25	-	2	PH 2	-	-	-	500	9000	-
WSPF4232	4,2	32	-	2	PH 2	-	-	-	500	6000	-

Self tapping screw with wafer head zinc plated WPO



- Material: electro-galvanized steel screw
- Purpose: for steel sheets (drilling capacity 0.6 mm), wood

	mm	mm	mm	mm max		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
WPO4213	4,2	13	-	0,6	PH 2	-	-	-	1000	18000	-
WPO4216	4,2	16	-	0,6	PH 2	-	-	-	1000	18000	-
WPO4219	4,2	19	-	0,6	PH 2	-	-	-	1000	12000	-
WPO4225	4,2	25	-	0,6	PH 2	-	-	-	500	9000	-
WPO4232	4,2	32	-	0,6	PH 2	-	-	-	500	6000	-
WPO4240	4,2	40	-	0,6	PH 2	-	-	-	400	4800	-
WPO4250	4,2	50	-	0,6	PH 2	-	-	-	300	3600	-
WPO4265	4,2	65	-	0,6	PH 2	-	-	-	250	3000	-

Self tapping screw with wafer head phosphated WPF



- Material: electro-galvanized steel screw
- Purpose: for steel sheets (drilling capacity 0.6 mm), for wood

	mm	mm	mm	mm max		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
WPF4213	4,2	13	-	0,6	PH 2	-	-	-	1000	18000	-
WPF4216	4,2	16	-	0,6	PH 2	-	-	-	1000	18000	-
WPF4219	4,2	19	-	0,6	PH 2	-	-	-	1000	12000	-
WPF4225	4,2	25	-	0,6	PH 2	-	-	-	500	9000	-
WPF4232	4,2	32	-	0,6	PH 2	-	-	-	500	6000	-

Window screw with flat double head WOPVC



- Material: electro-galvanized steel screw
- Purpose: for fixing hardware in profiles made of plastic and wood

	mm	mm	mm	mm max		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
WOPVC4025	4	25	-	-	PH 2	-	-	-	1000	18000	-
WOPVC4030	4	30	-	-	PH 2	-	-	-	1000	12000	-
WOPVC4035	4	35	-	-	PH 2	-	-	-	500	9000	-
WOPVC4040	4	40	-	-	PH 2	-	-	-	500	9000	-

Self-drilling screw TEX for window installation WTEXPVC



- Material: electro-galvanized steel screw
- Purpose: for joining plastic profiles with elements reinforcing PVC joinery and for other assembly works (drilling capacity up to 2.0 mm)

	mm	mm	mm	mm max		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
WTEXPVC3916	3,9	16	-	2	PH 2	-	-	-	1000	18000	-
WTEXPVC3919	3,9	19	-	2	PH 2	-	-	-	1000	18000	-
WTEXPVC3925	3,9	25	-	2	PH 2	-	-	-	1000	18000	-
WTEXPVC3932	3,9	32	-	2	PH 2	-	-	-	500	9000	-
WTEXPVC3938	3,9	38	-	2	PH 2	-	-	-	500	9000	-

Screws

Hardened screw for wood with countersunk head KDH



- Material: electro-galvanized steel screw
- Purpose: for wood, chipboard, plywood, plasterboard
- CE - screws made in accordance with EN:14592, with CE marking

	mm	mm	mm	mm max		mm	mm	mm	kg per box	kg per masterbox	kg per pallet
KDH30012*	3	12	full	-	PZ 1	-	-	-	5	20	-
KDH30016	3	16	full	-	PZ 1	-	-	16	5	20	-
KDH30020	3	20	full	-	PZ 1	-	2	18	5	20	-
KDH30025	3	25	full	-	PZ 1	-	7	18	5	20	-
KDH30030	3	30	full	-	PZ 1	-	12	18	5	20	-
KDH30035	3	35	full	-	PZ 1	-	17	18	5	20	-
KDH30040	3	40	full	-	PZ 1	-	22	18	5	20	-
KDH35016*	3,5	16	full	-	PZ 2	-	-	-	5	20	-
KDH35020	3,5	20	full	-	PZ 2	-	-	20	5	20	-
KDH35025	3,5	25	full	-	PZ 2	-	4	21	5	20	-
KDH35030	3,5	30	full	-	PZ 2	-	9	21	5	20	-
KDH35035	3,5	35	full	-	PZ 2	-	14	21	5	20	-
KDH35040	3,5	40	full	-	PZ 2	-	19	21	5	20	-
KDH35045	3,5	45	full	-	PZ 2	-	24	21	5	20	-
KDH35050	3,5	50	full	-	PZ 2	-	29	21	5	20	-
KDH40016*	4	16	full	-	PZ 2	-	-	-	5	20	-
KDH40020	4	20	full	-	PZ 2	-	-	-	5	20	-
KDH40025	4	25	full	-	PZ 2	-	1	24	5	20	-
KDH40030	4	30	full	-	PZ 2	-	6	24	5	20	-
KDH40035	4	35	full	-	PZ 2	-	11	24	5	20	-
KDH40040	4	40	full	-	PZ 2	-	16	24	5	20	-
KDH40045	4	45	full	-	PZ 2	-	21	24	5	20	-
KDH40050	4	50	full	-	PZ 2	-	26	24	5	20	-
KDH40060	4	60	full	-	PZ 2	-	36	24	5	20	-
KDH40070	4	70	60	-	PZ 2	-	46	24	5	20	-
KDH45016*	4,5	16	full	-	PZ 2	-	-	-	5	20	-
KDH45020*	4,5	20	full	-	PZ 2	-	-	-	5	20	-
KDH45025	4,5	25	full	-	PZ 2	-	-	25	5	20	-
KDH45030	4,5	30	full	-	PZ 2	-	3	27	5	20	-
KDH45035	4,5	35	full	-	PZ 2	-	8	27	5	20	-
KDH45040	4,5	40	full	-	PZ 2	-	13	27	5	20	-
KDH45045	4,5	45	full	-	PZ 2	-	18	27	5	20	-
KDH45050	4,5	50	full	-	PZ 2	-	23	27	5	20	-
KDH45060	4,5	60	full	-	PZ 2	-	33	27	5	20	-
KDH45070	4,5	70	60	-	PZ 2	-	43	27	5	20	-
KDH45080	4,5	80	60	-	PZ 2	-	53	27	5	20	-
KDH50025	5	25	full	-	PZ 2	-	-	-	5	20	-
KDH50030	5	30	full	-	PZ 2	-	-	30	5	20	-
KDH50035	5	35	full	-	PZ 2	-	5	30	5	20	-
KDH50040	5	40	full	-	PZ 2	-	10	30	5	20	-
KDH50045	5	45	full	-	PZ 2	-	15	30	5	20	-
KDH50050	5	50	full	-	PZ 2	-	20	30	5	20	-
KDH50060	5	60	full	-	PZ 2	-	30	30	5	20	-
KDH50070	5	70	60	-	PZ 2	-	40	30	5	20	-
KDH50080	5	80	60	-	PZ 2	-	50	30	5	20	-
KDH50090	5	90	60	-	PZ 2	-	60	30	5	20	-
KDH50100	5	100	60	-	PZ 2	-	70	30	5	20	-
KDH50120	5	120	75	-	PZ 2	-	90	30	5	20	-
KDH60030	6	30	full	-	PZ 3	-	-	30	5	20	-
KDH60040	6	40	full	-	PZ 3	-	4	36	5	20	-
KDH60050	6	50	full	-	PZ 3	-	14	36	5	20	-
KDH60060	6	60	full	-	PZ 3	-	24	36	5	20	-
KDH60070	6	70	60	-	PZ 3	-	34	36	5	20	-
KDH60080	6	80	60	-	PZ 3	-	44	36	5	20	-
KDH60090	6	90	60	-	PZ 3	-	54	36	5	20	-
KDH60100	6	100	60	-	PZ 3	-	64	36	5	20	-
KDH60120	6	120	75	-	PZ 3	-	84	36	5	20	-
KDH60140	6	140	75	-	PZ 3	-	104	36	5	20	-
KDH60160	6	160	75	-	PZ 3	-	124	36	5	20	-
KDH60180	6	180	75	-	PZ 3	-	144	36	5	20	-
KDH60200	6	200	75	-	PZ 3	-	164	36	5	20	-

* not subject to EN 14592

Hardened screw for wood with countersunk head WH



- Material: electro-galvanized steel screw
- Purpose: for wood, chipboard, plywood, plasterboard
- CE - screws made in accordance with EN:14592, with CE marking
- MEDIUM PACKAGING

	mm	mm	mm	mm max		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
WH30012*	3	12	full	-	PZ 1	-	-	-	2000	36000	-
WH30016	3	16	full	-	PZ 1	-	-	16	2000	36000	-
WH30020	3	20	full	-	PZ 1	-	2	18	2000	36000	-
WH30025	3	25	full	-	PZ 1	-	7	18	1500	27000	-
WH30030	3	30	full	-	PZ 1	-	12	18	1000	18000	-
WH30035	3	35	full	-	PZ 1	-	17	18	1000	18000	-
WH30040	3	40	full	-	PZ 1	-	22	18	500	9000	-
WH35016*	3,5	16	full	-	PZ 2	-	-	-	2000	36000	-
WH35020	3,5	20	full	-	PZ 2	-	-	20	1500	27000	-
WH35025	3,5	25	full	-	PZ 2	-	4	21	1000	18000	-
WH35030	3,5	30	full	-	PZ 2	-	9	21	500	9000	-
WH35035	3,5	35	full	-	PZ 2	-	14	21	500	9000	-
WH35040	3,5	40	full	-	PZ 2	-	19	21	500	9000	-
WH35045	3,5	45	full	-	PZ 2	-	24	21	500	9000	-
WH35050	3,5	50	full	-	PZ 2	-	29	21	400	7200	-
WH40016*	4	16	full	-	PZ 2	-	-	-	1000	18000	-
WH40020	4	20	full	-	PZ 2	-	-	-	1000	18000	-
WH40025	4	25	full	-	PZ 2	-	1	24	1000	18000	-
WH40030	4	30	full	-	PZ 2	-	6	24	500	9000	-
WH40035	4	35	full	-	PZ 2	-	11	24	500	9000	-
WH40040	4	40	full	-	PZ 2	-	16	24	500	9000	-
WH40045	4	45	full	-	PZ 2	-	21	24	300	5400	-
WH40050	4	50	full	-	PZ 2	-	26	24	300	5400	-
WH40060	4	60	full	-	PZ 2	-	36	24	250	3000	-
WH40070	4	70	60	-	PZ 2	-	46	24	250	3000	-
WH45016*	4,5	16	full	-	PZ 2	-	-	-	1000	18000	-
WH45020*	4,5	20	full	-	PZ 2	-	-	-	1000	18000	-
WH45025	4,5	25	full	-	PZ 2	-	-	25	500	9000	-
WH45030	4,5	30	full	-	PZ 2	-	3	27	500	9000	-
WH45035	4,5	35	full	-	PZ 2	-	8	27	500	9000	-
WH45040	4,5	40	full	-	PZ 2	-	13	27	300	5400	-
WH45045	4,5	45	full	-	PZ 2	-	18	27	300	5400	-
WH45050	4,5	50	full	-	PZ 2	-	23	27	250	4500	-
WH45060	4,5	60	full	-	PZ 2	-	33	27	250	3000	-
WH45070	4,5	70	60	-	PZ 2	-	43	27	250	3000	-
WH45080	4,5	80	60	-	PZ 2	-	53	27	250	3000	-
WH50025	5	25	full	-	PZ 2	-	-	-	500	9000	-
WH50030	5	30	full	-	PZ 2	-	-	30	500	9000	-
WH50035	5	35	full	-	PZ 2	-	5	30	500	6000	-
WH50040	5	40	full	-	PZ 2	-	10	30	500	6000	-
WH50045	5	45	full	-	PZ 2	-	15	30	300	5400	-
WH50050	5	50	full	-	PZ 2	-	20	30	300	3600	-
WH50060	5	60	full	-	PZ 2	-	30	30	200	2400	-
WH50070	5	70	60	-	PZ 2	-	40	30	200	2400	-
WH50080	5	80	60	-	PZ 2	-	50	30	200	2400	-
WH50090	5	90	60	-	PZ 2	-	60	30	200	2400	-
WH50100	5	100	60	-	PZ 2	-	70	30	200	2400	-
WH50120	5	120	75	-	PZ 2	-	90	30	200	2400	-
WH60030	6	30	full	-	PZ 3	-	-	30	200	3600	-
WH60040	6	40	full	-	PZ 3	-	4	36	200	3600	-
WH60050	6	50	full	-	PZ 3	-	14	36	200	2400	-
WH60060	6	60	full	-	PZ 3	-	24	36	200	2400	-
WH60070	6	70	60	-	PZ 3	-	34	36	100	1200	-
WH60080	6	80	60	-	PZ 3	-	44	36	100	1200	-
WH60090	6	90	60	-	PZ 3	-	54	36	100	1200	-
WH60100	6	100	60	-	PZ 3	-	64	36	100	1200	-
WH60120	6	120	75	-	PZ 3	-	84	36	100	1200	-
WH60140	6	140	75	-	PZ 3	-	104	36	100	1200	-
WH60160	6	160	75	-	PZ 3	-	124	36	100	900	-
WH60180	6	180	75	-	PZ 3	-	144	36	100	900	-
WH60200	6	200	75	-	PZ 3	-	164	36	100	900	-

* not subject to EN 14592

Hardened timber screw with countersunk head WHWS



- Material: electro-galvanized steel screw, TORX recess, facilitates screwing the screw into difficult surfaces thanks to a special design
- Purpose: for fixing the roof truss structure, wooden elements, chipboards, OSB, PVC elements

	mm	mm	mm	mm max		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
WHWS08080	8	80	50	-	T40	-	-	-	50	900	-
WHWS08100	8	100	50	-	T40	-	-	-	50	900	-
WHWS08120	8	120	80	-	T40	-	-	-	50	600	-
WHWS08140	8	140	80	-	T40	-	-	-	50	600	-
WHWS08160	8	160	80	-	T40	-	-	-	50	600	-
WHWS08180	8	180	80	-	T40	-	-	-	50	500	-
WHWS08200	8	200	80	-	T40	-	-	-	50	500	-
WHWS08220	8	220	80	-	T40	-	-	-	50	500	-
WHWS08240	8	240	80	-	T40	-	-	-	50	500	-
WHWS08260	8	260	80	-	T40	-	-	-	50	300	-
WHWS08280	8	280	80	-	T40	-	-	-	50	300	-
WHWS08300	8	300	80	-	T40	-	-	-	50	300	-
WHWS08320	8	320	80	-	T40	-	-	-	25	150	-
WHWS08340	8	340	80	-	T40	-	-	-	25	150	-
WHWS08360	8	360	80	-	T40	-	-	-	25	150	-

Hardened timber screw with wafer head WHWP



- Material: electro-galvanized steel screw, TORX recess, facilitates screwing the screw into difficult surfaces thanks to a special design
- Purpose: for fixing the roof truss structure, wooden elements, chipboards, OSB, PVC elements

	mm	mm	mm	mm max		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
WHWP06040	6	40	full	-	T30	-	-	-	100	1800	-
WHWP06050	6	50	30	-	T30	-	-	-	100	1800	-
WHWP06060	6	60	35	-	T30	-	-	-	100	1800	-
WHWP06070	6	70	40	-	T30	-	-	-	100	1800	-
WHWP06080	6	80	50	-	T30	-	-	-	100	1800	-
WHWP06090	6	90	50	-	T30	-	-	-	100	1800	-
WHWP06100	6	100	50	-	T30	-	-	-	100	1200	-
WHWP06120	6	120	80	-	T30	-	-	-	100	1200	-
WHWP06140	6	140	80	-	T30	-	-	-	100	1000	-
WHWP06160	6	160	80	-	T30	-	-	-	100	800	-
WHWP06180	6	180	80	-	T30	-	-	-	100	800	-
WHWP06200	6	200	80	-	T30	-	-	-	100	800	-
WHWP06220	6	220	80	-	T30	-	-	-	100	600	-
WHWP06240	6	240	80	-	T30	-	-	-	100	600	-
WHWP06260	6	260	80	-	T30	-	-	-	100	600	-
WHWP06280	6	280	80	-	T30	-	-	-	100	600	-
WHWP06300	6	300	80	-	T30	-	-	-	100	600	-
WHWP08040	8	40	full	-	T40	-	-	-	50	900	-
WHWP08050	8	50	30	-	T40	-	-	-	50	900	-
WHWP08060	8	60	35	-	T40	-	-	-	50	600	-
WHWP08080	8	80	50	-	T40	-	-	-	50	600	-
WHWP08100	8	100	50	-	T40	-	-	-	50	600	-
WHWP08120	8	120	80	-	T40	-	-	-	50	500	-
WHWP08140	8	140	80	-	T40	-	-	-	50	400	-
WHWP08160	8	160	80	-	T40	-	-	-	50	400	-
WHWP08180	8	180	80	-	T40	-	-	-	50	400	-
WHWP08200	8	200	80	-	T40	-	-	-	50	400	-
WHWP08220	8	220	80	-	T40	-	-	-	50	300	-
WHWP08240	8	240	80	-	T40	-	-	-	50	300	-
WHWP08260	8	260	80	-	T40	-	-	-	50	300	-
WHWP08280	8	280	80	-	T40	-	-	-	25	150	-
WHWP08300	8	300	80	-	T40	-	-	-	25	150	-
WHWP08320	8	320	80	-	T40	-	-	-	25	150	-
WHWP08340	8	340	80	-	T40	-	-	-	25	150	-
WHWP08360	8	360	80	-	T40	-	-	-	25	150	-
WHWP08380	8	380	80	-	T40	-	-	-	25	150	-
WHWP08400	8	400	80	-	T40	-	-	-	25	150	-

Confirmat screw KOS



- Material: electro-galvanized steel screw
- Purpose: for wood, chipboard, plywood

	mm	mm	mm	mm max		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
KOS6450	6,4	50	-	-	HEX 4	-	-	-	200	2400	-
KOS7050	7	50	-	-	HEX 4	-	-	-	200	2400	-
KOS7070	7	70	-	-	HEX 4	-	-	-	200	2400	-

Hardened wood screw DIN571 with hexagon head and flange WKL



- Material: electro-galvanized steel screw
- Purpose: for joining wooden, wood-based and PVC elements to wooden substrates

	mm	mm	mm	mm max		mm	mm	mm	kg per box	kg per masterbox	kg per pallet
WKL06040	6	40	29	-	10	-	-	-	5	20	-
WKL06050	6	50	-	-	10	-	-	-	5	20	-
WKL06060	6	60	46	-	10	-	-	-	5	20	-
WKL06070	6	70	50	-	10	-	-	-	5	20	-
WKL06080	6	80	57	-	10	-	-	-	5	20	-
WKL06090	6	90	60	-	10	-	-	-	5	20	-
WKL06100	6	100	67	-	10	-	-	-	5	20	-
WKL06120	6	120	77	-	10	-	-	-	5	20	-
WKL06140	6	140	95	-	10	-	-	-	5	20	-
WKL08060	8	60	44	-	13	-	-	-	5	20	-
WKL08070	8	70	50	-	13	-	-	-	5	20	-
WKL08080	8	80	65	-	13	-	-	-	5	20	-
WKL08090	8	90	66	-	13	-	-	-	5	20	-
WKL08100	8	100	75	-	13	-	-	-	5	20	-
WKL08120	8	120	-	-	13	-	-	-	5	20	-
WKL08140	8	140	96	-	13	-	-	-	5	20	-
WKL08160	8	160	108	-	13	-	-	-	5	20	-
WKL08180	8	180	115	-	13	-	-	-	5	20	-
WKL08200	8	200	136	-	13	-	-	-	5	20	-
WKL10080	10	80	65	-	17	-	-	-	5	20	-
WKL10100	10	100	76	-	17	-	-	-	5	20	-
WKL10120	10	120	85	-	17	-	-	-	5	20	-
WKL10140	10	140	90	-	17	-	-	-	5	20	-
WKL10180	10	180	115	-	17	-	-	-	5	20	-
WKL10200	10	200	-	-	17	-	-	-	5	20	-
WKL10260	10	260	170	-	17	-	-	-	5	20	-
WKL12100	12	100	71	-	19	-	-	-	5	20	-
WKL12120	12	120	82	-	19	-	-	-	5	20	-
WKL12140	12	140	92	-	19	-	-	-	5	20	-
WKL12160	12	160	-	-	19	-	-	-	5	20	-
WKL12180	12	180	116	-	19	-	-	-	5	20	-
WKL12200	12	200	124	-	19	-	-	-	5	20	-
WKL12220	12	220	148	-	19	-	-	-	5	20	-
WKL12240	12	240	172	-	19	-	-	-	5	20	-
WKL12260	12	260	-	-	19	-	-	-	5	20	-

Phosphated drywall screw with bugle head for steel profiles MD



▪ BIG PACKAGING - TYPE M

	mm	mm	mm	mm max		mm	mm	mm	kg per box	kg per masterbox	kg per pallet
MD35025	3,5	25	full	0,6	PH 2	-	-	-	10	-	-
MD35035	3,5	35	full	0,6	PH 2	-	-	-	10	-	-
MD35045	3,5	45	full	0,6	PH 2	-	-	-	10	-	-
MD35055	3,5	55	full	0,6	PH 2	-	-	-	10	-	-
MD42070	4,2	70	50	0,6	PH 2	-	-	-	10	-	-
MD42090	4,2	90	63,5	0,6	PH 2	-	-	-	10	-	-
MD48100	4,8	100	63,5	0,6	PH 2	-	-	-	10	-	-
MD48120	4,8	120	63,5	0,6	PH 2	-	-	-	10	-	-

Phosphated drywall screw with bugle head for steel profiles MS



▪ MEDIUM PACKAGING - TYPE M

	mm	mm	mm	mm max		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
MS35025	3,5	25	full	0,6	PH 2	-	-	-	1000	12000	-
MS35035	3,5	35	full	0,6	PH 2	-	-	-	1000	12000	-
MS35045	3,5	45	full	0,6	PH 2	-	-	-	500	6000	-
MS35055	3,5	55	full	0,6	PH 2	-	-	-	500	6000	-
MS42070	4,2	70	50	0,6	PH 2	-	-	-	250	3000	-
MS42090	4,2	90	63,5	0,6	PH 2	-	-	-	250	3000	-
MS48100	4,8	100	63,5	0,6	PH 2	-	-	-	200	2400	-
MS48120	4,8	120	63,5	0,6	PH 2	-	-	-	200	2400	-

Phosphated drywall screw with bugle head for timber DD



▪ BIG PACKAGING - TYPE D

	mm	mm	mm	mm max		mm	mm	mm	kg per box	kg per masterbox	kg per pallet
DD35025	3,5	25	full	-	PH 2	-	-	-	10	-	-
DD35035	3,5	35	full	-	PH 2	-	-	-	10	-	-
DD35045	3,5	45	full	-	PH 2	-	-	-	10	-	-
DD35055	3,5	55	full	-	PH 2	-	-	-	10	-	-
DD42070	4,2	70	50	-	PH 2	-	-	-	10	-	-
DD42090	4,2	90	63,5	-	PH 2	-	-	-	10	-	-
DD48100	4,8	100	63,5	-	PH 2	-	-	-	10	-	-
DD48120	4,8	120	63,5	-	PH 2	-	-	-	10	-	-

Phosphated drywall screw with bugle head for timber DS



▪ MEDIUM PACKAGING - TYPE D

	mm	mm	mm	mm max		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
DS35025	3,5	25	full	-	PH 2	-	-	-	1000	12000	-
DS35035	3,5	35	full	-	PH 2	-	-	-	1000	12000	-
DS35045	3,5	45	full	-	PH 2	-	-	-	500	6000	-
DS35055	3,5	55	full	-	PH 2	-	-	-	500	6000	-
DS42070	4,2	70	50	-	PH 2	-	-	-	250	3000	-
DS42090	4,2	90	63,5	-	PH 2	-	-	-	250	3000	-
DS48100	4,8	100	63,5	-	PH 2	-	-	-	200	2400	-
DS48120	4,8	120	63,5	-	PH 2	-	-	-	200	2400	-

Self-drilling screw TEX phosphated TEXF



- Material: steel screw, phosphated
- Purpose: for screwing profiles from sheets when installing plasterboards (capacity to drill up to 2.0 mm)

	mm	mm	mm	mm max		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
TEXF10003595	3,5	9,5	-	2	PH 2	-	-	-	1000	18000	-
TEXF10003911	3,9	11	-	2	PH 2	-	-	-	1000	18000	-

Self-drilling screw TEX zinc plated TEXOC



- Material: steel screw
- Purpose: for screwing profiles from sheets when installing plasterboards (capacity to drill up to 2.0 mm)

	mm	mm	mm	mm max		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
TEXOC10003595	3,5	9,5	-	2	PH 2	-	-	-	1000	18000	-

Self-drilling drywall screw with countersunk head phosphated KSSF



- MEDIUM PACKAGING

	mm	mm	mm	mm max		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
KSSF3525	3,5	25	-	2	PH 2	-	-	-	1000	12000	-
KSSF3535	3,5	35	-	2	PH 2	-	-	-	1000	12000	-
KSSF3545	3,5	45	-	2	PH 2	-	-	-	500	6000	-

Rivets

Aluminum blind rivet NIT



- Material: steel pin, aluminum connecting rivet
- Purpose: for joining metal sheets and other steel components attached to steel substrates
- LARGE PACKAGING

	mm	mm	mm	mm		mm	mm	mm	kg per box	kg per masterbox	kg per pallet
NIT3006	3	6	-	-	-	3,1	1,5 - 3,5	-	5	20	-
NIT3008	3	8	-	-	-	3,1	3,5 - 5,0	-	5	20	-
NIT3010	3	10	-	-	-	3,1	5 - 7	-	5	20	-
NIT3012	3	12	-	-	-	3,1	7 - 9	-	5	20	-
NIT4006	4	6	-	-	-	4,1	1 - 3	-	5	20	-
NIT4008	4	8	-	-	-	4,1	3 - 5	-	5	20	-
NIT4010	4	10	-	-	-	4,1	5,0 - 6,5	-	5	20	-
NIT4012	4	12	-	-	-	4,1	6,5 - 8,5	-	5	20	-
NIT4014	4	14	-	-	-	4,1	8,5 - 10,5	-	5	20	-
NIT4016	4	16	-	-	-	4,1	8,5 - 12,5	-	5	20	-
NIT4018	4	18	-	-	-	4,1	12,5 - 14,5	-	5	20	-
NIT4020	4	20	-	-	-	4,1	12,5 - 16,5	-	5	20	-
NIT4806	4,8	6	-	-	-	4,9	1,5 - 2,5	-	5	20	-
NIT4808	4,8	8	-	-	-	4,9	2,5 - 4,0	-	5	20	-
NIT4810	4,8	10	-	-	-	4,9	4 - 6	-	5	20	-
NIT4812	4,8	12	-	-	-	4,9	6 - 8	-	5	20	-
NIT4814	4,8	14	-	-	-	4,9	8 - 10	-	5	20	-
NIT4816	4,8	16	-	-	-	4,9	8 -12	-	5	20	-
NIT4818	4,8	18	-	-	-	4,9	12 - 14	-	5	20	-
NIT4820	4,8	20	-	-	-	4,9	12 - 15	-	5	20	-
NIT4822	4,8	22	-	-	-	4,9	16 - 18	-	5	20	-
NIT4824	4,8	24	-	-	-	4,9	18 - 20	-	5	20	-
NIT4830	4,8	30	-	-	-	4,9	20 - 25	-	5	20	-

Handles and ties

Mounting bracket for flat cables UMP



- Material: PE plastic
- Purpose: for electrical installation of wires, cables

	mm		mm	mm	mm	pcs per bag	bags per box	bags per masterbox
UMP10	Ø10	-	6-7	YDYp 3x1.5	-	100	20	-
UMP12	Ø12	-	6-7	YDYp 3x2.5	-	100	20	-
UMP16	Ø16	-	6-7	YDYp 4x1.5, YDYp 4x2.5	-	80	20	-
UMP18	Ø18	-	6-7	YDYp 5x1.5, YDYp 5x2.5	-	50	20	-
UMP25	Ø25	-	8	YDYp 5x4, YDYp 5x6	-	50	20	-

Mounting bracket for round cables UMO



- Material: PE plastic
- Purpose: for electrical installation of wires, cables

	mm		mm	mm	mm	pcs per bag	bags per box	bags per masterbox
UMO06	Ø6	-	5	YTDY(2-10)x0.5, YTKSY(1-5)x2x0.5, DY4,DY6	-	100	20	-
UMO08	Ø8	-	7-8	RG-6, YDY 2x1,0 ; 2x1,5 ; 3x1,0 ; 3x1,5	-	100	20	-
UMO10	Ø10	-	7-8	YDY 2x4 ; 2x6 ; 3x4 ; 3x2,5 ; 4x2,5 ; 7x1,5	-	100	20	-
UMO12	Ø12	-	7-8	YDY 3x6 ; 5x4 ; 4x6 ; 7x2.5 ; 10x1	-	75	20	-
UMO14	Ø14	-	7-8	YDY 5x6 ; 2x10 ; 3x10 ; 3x10 ; 7x4 ; 10x1.5	-	60	20	-
UMO16	Ø16	-	7-8	YDY 7x6 ; 4x10	-	40	20	-

Hook mounting bracket for round cables UMHO



- Material: PE plastic
- Purpose: for electrical installation of wires, cables

	mm		mm	mm	mm	pcs per bag	bags per box	bags per masterbox
UMHO10	Ø10	-	5	YDY 3x2.5 ; 2x6 ; 3x4 ; 5x2.5 ; 7x1.5	-	100	20	-
UMHO16	Ø16	-	6	YDY 5x6 ; 7x6 ; 4x10 ; 5x10,	-	40	20	-

Double mounting bracket for flat cables UMTP



- Material: PE plastic
- Purpose: for electrical installation of wires, cables

	mm		mm	mm	mm	pcs per bag	bags per box	bags per masterbox
UMTP10	Ø10	-	6-7	2 x YDYp 3x1.5	-	60	20	-
UMTP12	Ø12	-	6-7	2 x YDYp 3x2.5	-	60	20	-

Snap-on bracket for electrical cables UZ



- Material: made of nylon
- Purpose: for electrical installation of wires, cables, pipes, conduits

	mm		mm	mm	mm	pcs per bag	bags per box	bags per masterbox
UZ13	Ø13	-	-	YDY 3x6 ; 5x4 ; 4x6 ; 7x2.5 ; 10x1	-	40	20	-
UZ16	Ø16	-	-	YDY 7x6 ; 4x10, ø < 16 mm	-	20	20	-
UZ22	Ø22	-	-	YDY 5x10 ; 7x10, ø < 20 mm	-	15	20	-

Bracket clamp with plug UPK



- Material: PE plastic
- Purpose: for electrical installation of wires, cables

	mm		mm	mm	mm	pcs per bag	bags per box	bags per masterbox
UPK06	Ø6	-	6	10 ÷ 20	-	50	20	-
UPK08	Ø8	-	8	15 ÷ 23	-	50	20	-
UPK10	Ø10	-	10	25 ÷ 35	-	25	20	-

Round cable clip with nail FLOPO



- Material: PE plastic
- Purpose: for electrical installation of wires, cables

	mm		mm	mm	mm	pcs per bag	bags per box	bags per masterbox
FLOPO05	-	-	-	Ø5	-	100	20	-
FLOPO06	-	-	-	Ø6	-	100	20	-
FLOPO07	-	-	-	Ø7	-	100	20	-
FLOPO08	-	-	-	Ø8	-	100	20	-
FLOPO10	-	-	-	Ø10	-	100	20	-

Flat cable clip with nail FLOPP



- Material: PE plastic
- Purpose: for electrical installation of wires, cables

	mm		mm	mm	mm	pcs per bag	bags per box	bags per masterbox
FLOPP08	-	-	-	8	-	100	20	-
FLOPP10	-	-	-	10	-	100	20	-
FLOPP13	-	-	-	13	-	100	20	-

Hose clamp OPS



- Material: bolt and lock galvanized (no chromium VI content)
- tape with a width of 9mm, coated with Al-Zn
- easy to install - screwdriver or 7 mm wrench
- Purpose: for installing pipes and cables

	mm		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
S-41012	9	7 / PH2	-	Ø8 ÷ 12	-	50	800	-
S-41016	9	7 / PH2	-	Ø10 ÷ 16	-	50	800	-
S-41022	9	7 / PH2	-	Ø12 ÷ 22	-	50	800	-
S-41027	9	7 / PH2	-	Ø16 ÷ 27	-	50	800	-
S-41032	9	7 / PH2	-	Ø20 ÷ 32	-	50	800	-
S-41040	9	7 / PH2	-	Ø25 ÷ 40	-	50	800	-
S-41050	9	7 / PH2	-	Ø35 ÷ 50	-	50	800	-
S-41060	9	7 / PH2	-	Ø40 ÷ 60	-	50	400	-
S-41070	9	7 / PH2	-	Ø50 ÷ 70	-	50	400	-
S-41080	9	7 / PH2	-	Ø60 ÷ 80	-	50	400	-
S-41090	9	7 / PH2	-	Ø70 ÷ 90	-	25	400	-
S-41100	9	7 / PH2	-	Ø80 ÷ 100	-	25	400	-
S-41110	9	7 / PH2	-	Ø90 ÷ 110	-	25	400	-
S-41120	9	7 / PH2	-	Ø100 ÷ 120	-	25	300	-
S-41130	9	7 / PH2	-	Ø110 ÷ 130	-	25	300	-
S-41150	9	7 / PH2	-	Ø130 ÷ 150	-	25	200	-
S-41160	9	7 / PH2	-	Ø140 ÷ 160	-	25	200	-
S-41170	9	7 / PH2	-	Ø150 ÷ 170	-	25	200	-
S-41180	9	7 / PH2	-	Ø160 ÷ 180	-	25	200	-
S-41200	9	7 / PH2	-	Ø180 ÷ 200	-	25	200	-
S-41220	9	7 / PH2	-	Ø200 ÷ 220	-	25	200	-
S-41240	9	7 / PH2	-	Ø220 ÷ 240	-	25	200	-

Hose clamp (with label) OPSS



- material: galvanized screw and lock (without chromium VI)
- 9 mm wide tape covered with Al-Zn
- easy to install - screwdriver or 7 mm
- wrench purpose: for installation of pipes and cables

	mm		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
S-41012S	9	7 / PH2	-	Ø8 ÷ 12	-	50	800	-
S-41016S	9	7 / PH2	-	Ø10 ÷ 16	-	50	800	-
S-41022S	9	7 / PH2	-	Ø12 ÷ 22	-	50	800	-
S-41027S	9	7 / PH2	-	Ø16 ÷ 27	-	50	800	-
S-41032S	9	7 / PH2	-	Ø20 ÷ 32	-	50	800	-
S-41040S	9	7 / PH2	-	Ø25 ÷ 40	-	50	800	-
S-41050S	9	7 / PH2	-	Ø35 ÷ 50	-	50	800	-
S-41060S	9	7 / PH2	-	Ø40 ÷ 60	-	50	400	-
S-41070S	9	7 / PH2	-	Ø50 ÷ 70	-	50	400	-
S-41080S	9	7 / PH2	-	Ø60 ÷ 80	-	50	400	-
S-41090S	9	7 / PH2	-	Ø70 ÷ 90	-	25	400	-
S-41100S	9	7 / PH2	-	Ø80 ÷ 100	-	25	400	-
S-41110S	9	7 / PH2	-	Ø90 ÷ 110	-	25	400	-
S-41120S	9	7 / PH2	-	Ø100 ÷ 120	-	25	300	-
S-41130S	9	7 / PH2	-	Ø110 ÷ 130	-	25	300	-
S-41150S	9	7 / PH2	-	Ø130 ÷ 150	-	25	200	-
S-41160S	9	7 / PH2	-	Ø140 ÷ 160	-	25	200	-
S-41170S	9	7 / PH2	-	Ø150 ÷ 170	-	25	200	-
S-41180S	9	7 / PH2	-	Ø160 ÷ 180	-	25	200	-
S-41200S	9	7 / PH2	-	Ø180 ÷ 200	-	25	200	-
S-41220S	9	7 / PH2	-	Ø200 ÷ 220	-	25	200	-
S-41240S	9	7 / PH2	-	Ø220 ÷ 240	-	25	200	-

Single pipe clamp with rubber URG



- Material: galvanized steel, polypropylene dowel, spacer - EPDM rubber
- Purpose: for installing steel and PE pipes

	mm		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
URG038	12x60	PZ2	12	15 ÷ 19 (3/8")	60	25	300	9600
URG012	12x60	PZ2	12	20 ÷ 24 (1/2")	60	25	300	9600
URG034	12x60	PZ2	12	25 ÷ 30 (3/4")	60	25	250	8000
URG100	12x60	PZ2	12	32 ÷ 37 (1")	60	20	300	6000
URG054	12x60	PZ2	12	40 ÷ 45 (5/4")	60	20	200	4000
URG064	12x60	PZ2	12	48 ÷ 53 (6/4")	60	20	200	4000
URG200	12x60	PZ2	12	59 ÷ 63 (2")	60	20	160	3200
URG212	12x60	PZ2	12	75 ÷ 80 (2 1/2")	60	20	140	2800
URG300	12x60	PZ2	12	88 ÷ 100 (3")	60	20	100	2000
URG400	12x60	PZ2	12	108 ÷ 116 (4")	60	10	100	2000
URG500	12x60	PZ2	12	130 ÷ 140 (5")	60	10	50	1000
URG600	12x60	PZ2	12	159 ÷ 168 (6")	60	10	50	1000
URG800	12x60	PZ2	12	195 ÷ 205 (8")	60	1	20	400

Double pipe clamp with rubber URPG



- Material: galvanized steel
- polypropylene dowel
- spacer - EPDM rubber
- Purpose: for installing steel and PE pipes

	mm		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
URPG038	12x60	PZ2	12	16 ÷ 19 (3/8")	60	20	300	6000
URPG012	12x60	PZ2	12	20 ÷ 24 (1/2")	60	20	200	6000
URPG034	12x60	PZ2	12	25 ÷ 30 (3/4")	60	20	160	4000
URPG100	12x60	PZ2	12	31 ÷ 36 (1")	60	20	100	3200

Single clamp for pipes with rubber without mounting kit ORG



- galvanized steel
- for installation of steel and PE pipes, ensures quick, convenient and stable fixing of pipes in vertical or horizontal position and an aesthetic appearance of the installation
- M8 threaded fastening
- EPDM rubber insert reduces mechanical and acoustic vibrations

	mm		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
ORG038	-	SL / PH	-	15 ÷ 19 (3/8")	-	25	300	9600
ORG012	-	SL / PH	-	20 ÷ 24 (1/2")	-	25	300	9600
ORG034	-	SL / PH	-	25 ÷ 30 (3/4")	-	25	250	9600
ORG100	-	SL / PH	-	32 ÷ 37 (1")	-	20	300	9600
ORG054	-	SL / PH	-	40 ÷ 45 (5/4")	-	20	200	6400
ORG064	-	SL / PH	-	48 ÷ 53 (6/4")	-	20	200	6400
ORG200	-	SL / PH	-	59 ÷ 63 (2")	-	20	160	5120
ORG212	-	SL / PH	-	75 ÷ 80 (2 1/2")	-	20	140	2800
ORG300	-	SL / PH	-	88 ÷ 98 (3")	-	20	100	2000
ORG400	-	SL / PH	-	108 ÷ 116 (4")	-	10	100	2000
ORG500	-	SL / PH	-	130 ÷ 140 (5")	-	10	50	2000
ORG600	-	SL / PH	-	159 ÷ 169 (6")	-	10	50	2000
ORG800	-	SL / PH	-	195 ÷ 205 (8")	-	10	40	400

Double clamp for pipes with rubber without mounting kit ORPG



- galvanized steel
- for installation of steel and PE pipes, ensures quick, convenient and stable fixing of pipes in vertical or horizontal position and an aesthetic appearance of the installation
- M8 threaded fastening
- EPDM rubber insert reduces mechanical and acoustic vibrations

	mm		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
ORPG038	-	SL / PH	-	16 ÷ 19 (3/8")	-	20	300	9600
ORPG012	-	SL / PH	-	20 ÷ 24 (1/2")	-	20	200	6400
ORPG034	-	SL / PH	-	25 ÷ 30 (3/4")	-	20	160	5120
ORPG100	-	SL / PH	-	31 ÷ 36 (1")	-	20	100	3200

Single pipe clamp UR



- Material: galvanized steel
- polypropylene dowel
- Purpose: for installing steel and PE pipes

	mm		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
UR038	12x60	PZ2	12	15 ÷ 19 (3/8")	60	25	300	9600
UR012	12x60	PZ2	12	20 ÷ 24 (1/2")	60	25	300	9600
UR034	12x60	PZ2	12	25 ÷ 30 (3/4")	60	25	250	8000
UR100	12x60	PZ2	12	32 ÷ 37 (1")	60	20	300	9600
UR054	12x60	PZ2	12	40 ÷ 45 (5/4")	60	20	200	6000
UR064	12x60	PZ2	12	48 ÷ 53 (6/4")	60	20	200	6000
UR200	12x60	PZ2	12	59 ÷ 63 (2")	60	20	200	4000
UR212	12x60	PZ2	12	75 ÷ 80 (2 1/2")	60	20	140	2800
UR300	12x60	PZ2	12	88 ÷ 100 (3")	60	20	100	2000
UR400	12x60	PZ2	12	108 ÷ 116 (4")	60	10	100	2000
UR600	12x60	PZ2	12	159 ÷ 168 (6")	60	10	50	1000

Dobule pipe clamp URP




- Material: galvanized steel,
- polypropylene sleeve
- Intended use: for installation of steel and PE
- pipes Intended use: for mounting in substrates made of solid building materials such as: plain concrete, solid ceramic bricks, solid silicate bricks

	mm		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
URP038	12x60	PZ2	12	16 ÷ 19 (3/8")	60	20	300	6000
URP012	12x60	PZ2	12	20 ÷ 24 (1/2")	60	20	200	4000
URP034	12x60	PZ2	12	25 ÷ 30 (3/4")	60	20	200	3200
URP100	12x60	PZ2	12	31 ÷ 36 (1")	60	20	160	2000

Carpentry joints

Narrow angle bracket KW

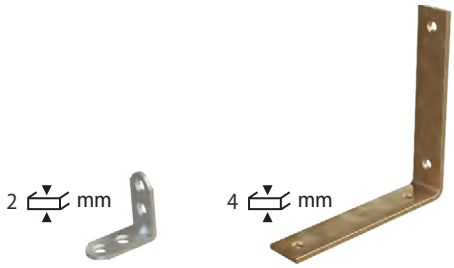

- Material: galvanized low-carbon steel sheet
- Purpose: for wooden structures

	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
KW1	25 x 25 x 15	2	100	-	35000
KW2	30 x 30 x 15	2	100	-	30000
KW3	40 x 40 x 15	2	100	-	25000
KW4	50 x 50 x 15	2	100	-	20000
KW5	60 x 60 x 15	2	100	-	20000
KW6	75 x 75 x 15	2	50	-	15000
KW7	90 x 90 x 18	2	50	-	15000
KW8	100 x 100 x 20	2	50	-	7000
KW9	100 x 100 x 20	4	25	-	7000
KW10	125 x 125 x 20	4	25	-	4000
KW11	150 x 150 x 20	4	25	-	3000

Wide angle bracket KS



- Material: galvanized low-carbon steel sheet
- Purpose: for wooden structures

	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
KS1	30 x 30 x 30	2	50	-	25000
KS2	40 x 40 x 40	2	50	-	18000
KS3	60 x 60 x 60	2	50	-	8000

Beam angle bracket KB



- Material: galvanized low-carbon steel sheet
- Purpose: for wooden structures

	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
KB1	100 x 75 x 29	2,5	25	-	9000
KB2	100 x 50 x 49	4	20	-	4000
KB3	120 x 80 x 35	4	20	-	4000
KB4	180 x 120 x 39	4	10	-	2000

Corner bracket NA



- Material: low-carbon steel sheet, galvanized
- Purpose: for wooden structures

	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
NA1	100 x 100 x 15	2	20	-	10000
NA2	150 x 150 x 25	2,5	20	-	1500
NA3	200 x 200 x 30	2,5	10	-	2000

Reinforced stamped angle bracket KPW



- Material: galvanized low-carbon steel sheet
- Purpose: for wooden structures

	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
KPW1	40 x 40 x 40	2	50	-	18000
KPW2	50 x 50 x 35	2,5	50	-	13000
KPW3	50 x 150 x 35	2,5	25	-	7000
KPW4	65 x 65 x 55	2,5	25	-	7000
KPW5	70 x 70 x 55	2	25	-	8500
KPW6	83 x 62 x 40	2	50	-	10000
KPW7	90 x 50 x 55	2,5	25	-	6500
KPW8	93 x 93 x 40	2,5	25	-	6500
KPW9	90 x 90 x 65	2,5	25	-	5000
KPW10	105 x 105 x 90	2,5	25	-	3000
KPW11	120 x 90 x 40	2,5	25	-	5500
KPW12	125 x 125 x 90	2,5	20	-	2000
KPW13	150 x 150 x 65	2,5	20	-	2500
KPW17	48 x 90 x 50	2,5	25	-	2000
KPW19	90 x 90 x 65	2,5	25	-	5000
KPW20	105 x 105 x 90	2,5	25	-	3000
KPW21	172 x 105 x 90	2,5	20	-	2000
KPW22	210 x 150 x 90	2,5	20	-	2000
KPW23	250x150x95	2,5	20	-	1500
KPWE7	90 x 50 x 55	2	25	-	8000
KPWE9	90 x 90 x 65	2	25	-	5000
KPWE10	105 x 105 x 90	2	25	-	3000

Connecting angle bracket KL



- Material: galvanized low-carbon steel sheet
- Purpose: for wooden structures

	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
KL1	40 x 40 x 40	2	50	-	18000
KL2	50 x 50 x 35	2,5	50	-	13000
KL3	50 x 150 x 35	2,5	25	-	7000
KL4	65 x 65 x 55	2,5	25	-	7000
KL5	70 x 70 x 55	2	25	-	8500
KL6	83 x 62 x 40	2	50	-	10000
KL7	90 x 50 x 55	2	25	-	6500
KL8	93 x 93 x 40	2,5	25	-	6500
KL9	90 x 90 x 65	2,5	25	-	4000
KL10	105 x 105 x 90	2,5	25	-	3000
KL11	120 x 90 x 40	2,5	25	-	5500
KL21	150 x 150 x 65	2,5	20	-	2500

Adjustable angle bracket KR



- Material: galvanized low-carbon steel sheet
- Purpose: for wooden structures

	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
KR	70 x 50 x 60	2	25	-	6000

Perforated plate angle bracket KP



- Material: galvanized low-carbon steel sheet
- Purpose: for wooden structures

	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
KP1	40 x 40 x 20	2	50	-	20000
KP2	40 x 40 x 40	2	50	-	18000
KP3	40 x 40 x 60	2	50	-	13000
KP4	40 x 40 x 100	2	25	-	4000
KP5	40 x 40 x 200	2	25	-	3000
KP6	50 x 50 x 40	2	50	-	15000
KP7	60 x 60 x 40	2	50	-	12000
KP8	60 x 60 x 60	2	50	-	8500
KP9	60 x 60 x 80	2	25	-	6000
KP10	60 x 60 x 100	2	25	-	5000
KP11	80 x 80 x 40	2	25	-	9000
KP12	80 x 80 x 60	2	25	-	6500
KP13	80 x 80 x 80	2	25	-	5000
KP14	100 x 100 x 60	2	25	-	5200
KP15	100 x 100 x 80	2	25	-	4000
KP16	100 x 100 x 100	2	25	-	3000
KP17	100 x 200 x 100	2	25	-	2000

Anchor angle bracket KK



- Material: galvanized low-carbon steel sheet
- Purpose: for wooden structures

	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
KK1	40 x 200 x 40	2	25	-	6000
KK2	40 x 300 x 40	2	25	-	4000
KK3	40 x 400 x 40	2	25	-	3000

Rafter connector LK



- Material: galvanized low-carbon steel sheet
- Purpose: for wooden structures

	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
LK1	33 x 168 ; left		25	-	7000
LK2	33 x 168 ; right		25	-	7000
LK3	33 x 210 ; left		25	-	5000
LK4	33 x 210 ; right		25	-	5000
LK5	33 x 250 ; left		25	-	4500
LK6	33 x 250 ; right		25	-	4500
LK7	33 x 290 ; left		25	-	4000
LK8	33 x 290 ; right		25	-	4000

Perforated plate PP



- Material: galvanized low-carbon steel sheet
- Purpose: for wooden structures

	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
PP1	40 x 80	2	25	-	19000
PP2	40 x 100	2	25	-	15000
PP3	40 x 120	2	25	-	12000
PP4	40 x 160	2	25	-	9500
PP5	50 x 200	2	25	-	6200
PP6	60 x 140	2	25	-	7300
PP7	60 x 160	2	25	-	6500
PP8	60 x 200	2	25	-	5000
PP9	60 x 240	2	25	-	4300
PP10	80 x 180	2	25	-	4200
PP11	80 x 200	2	25	-	3500
PP12	80 x 240	2	25	-	3200
PP13	80 x 300	2	20	-	2500
PP14	100 x 200	2	20	-	3000
PP15	100 x 240	2	20	-	2000
PP16	100 x 260	2	20	-	2000
PP17	100 x 300	2	20	-	2000
PP18	100 x 400	2	10	-	1200
PP19	120 x 240	2	10	-	1100
PP20	120 x 300	2	10	-	1000
PP21	140 x 400	2	10	-	700
PP39	40 x 1000	2	5	-	300
PP41	40 x 1200	2	5	-	350
PP50	60 x 1000	2	5	-	350
PP52	60 x 1200	2	5	-	300
PP58	80 x 1000	2	5	-	350
PP60	80 x 1200	2	5	-	300
PP69	100 x 1000	2	5	-	350
PP71	100 x 1200	2	5	-	300


Flat connector LPS



- Material: galvanized low-carbon steel sheet
- Purpose: for wooden structures

	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
LPS1	100 x 35	2,5	25	-	15000
LPS2	135 x 55	2	25	-	8500
LPS3	180 x 40	2,5	25	-	6000
LPS4	176 x 65	2,5	25	-	2000
LPS5	205 x 90	2,5	25	-	1500

Metal nail connector plate PK

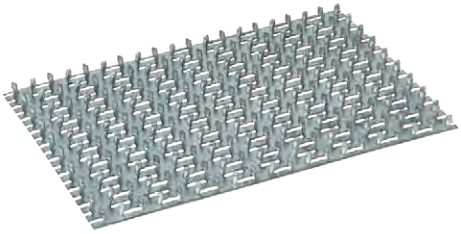

- Material: galvanised low carbon steel sheet
- Purpose: for wooden structures

	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
PK1	40 x 80	1	20	-	7000
PK2	40 x 100	1	20	-	6000
PK3	40 x 120	1	20	-	5000

Straight perforated mounting tape TP



- Material: galvanized low-carbon steel sheet
- Purpose: for wooden structures

	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
TP210	25 x 10 mb	2	1	-	60
TP225	25 x 25 mb	2	1	-	50
TP310	40 x 10 mb	2	1	-	60
TP325	40 x 25 mb	2	1	-	50
TP410	60 x 10 mb	2	1	-	60
TP425	60 x 25 mb	2	1	-	50
TP510	20 x 10 mb	1,5	1	-	60
TP525	20 x 25 mb	1,5	1	-	50

Wavy perforated mounting tape TP



- Material: galvanized low-carbon steel sheet
- Purpose: for wooden structures

	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
TP703	11 x 3 mb	1	1	-	1000
TP710	11 x 10 mb	1	1	-	1000

Galvanized carpentry nails GC



- Material: hardened steel, electro-galvanized
- Purpose: for fixing carpentry joints to wooden structures

	mm	mm	kg per box	kg per masterbox	kg per pallet
GC4040	4,0 x 40	-	-	5	-
GC4050	4,0 x 50	-	-	5	-
GC4060	4,0 x 60	-	-	5	-
GC4070	4,0 x 70	-	-	5	-
GC4080	4,0 x 80	-	-	5	-

Joist hanger WB



- Material: galvanized low-carbon steel sheet
- Purpose: for wooden structures

	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
WB1	40 x 110 x 75	2	5	-	600
WB2	50 x 125 x 75	2	5	-	500
WB3	50 x 145 x 75	2	5	-	500
WB4	60 x 100 x 75	2	5	-	500
WB5	60 x 130 x 75	2	5	-	500
WB6	60 x 150 x 75	2	5	-	500
WB7	70 x 125 x 75	2	5	-	500
WB8	70 x 155 x 75	2	5	-	500
WB9	80 x 120 x 75	2	5	-	500
WB10	80 x 150 x 75	2	5	-	500
WB11	100 x 140 x 75	2	5	-	500
WB12	120 x 160 x 75	2	5	-	500
WB13*	45 x 138 x 75	2	5	-	500

Split left joist hanger WBDL



- Material: galvanized low-carbon steel sheet
- Purpose: for wooden structures

	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
WBD	39 x 122 ; left	2	5	-	1000
WBDP	39 x 122 ; right	2	5	-	1000

Post holder LB



- Material: electro-galvanized low-carbon steel sheet
- Purpose: for wooden structures

	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
LB070100	70 x 60 x 100 ; 200	4	1	-	500
LB080100	80 x 60 x 100 ; 200	4	1	-	500
LB090100	90 x 60 x 100 ; 200	4	1	-	500
LB100100	100 x 60 x 100 ; 200	4	1	-	500
LB120100	120 x 60 x 100 ; 200	4	1	-	500
LB140100	140 x 60 x 100 ; 200	4	1	-	500
LB150100	150 x 60 x 100 ; 200	4	1	-	500

Post holder type L (open) LBOT



- low-carbon steel sheet, electro-galvanized or hot-dip galvanized
- for mounting wooden beams

	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
LBOT070100	70 x 60 x 100; 200	4	1	-	500

Adjustable post base with embedment rebar LBREG



- low-carbon steel sheet, electro-galvanized or hot-dip galvanized
- for mounting wooden beams

	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
LBREG070150	70-150 x 65 x 105 ; 200 ; regulowany	4	1	-	500


Post base with baseplate (square post) KOP



- Material: electro-galvanized low-carbon steel sheet
- Purpose: for wooden structures

	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
KOP071150	71 x 150 x 150	1,8	1	-	-
KOP091150	91 x 150 x 150	1,8	1	-	-
KOP101150	101 x 101 x 150	1,8	1	-	-
KOP121180	121 x 150 x 180	1,8	1	-	-
KOP141200	141 x 150 x 200	1,8	1	-	-

Post support ground spike KOW

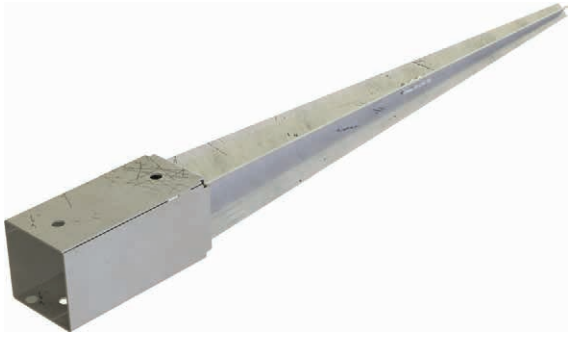

- Material: electro-galvanized low-carbon steel sheet
- Purpose: for wooden structures

	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
KOW046450	46 x 150 x 450 ;600	1,8	1	-	-
KOW071600	71 x 150 x 600; 750	1,8	1	-	-
KOW091600	91 x 150 x 600 ;750	1,8	1	-	-
KOW101750	101 x 150 x 750 ;900	1,8	1	-	-
KOW121750	121 x 150 x 750 ;900	1,8	1	-	-

Pergola bracket OP



- carbon steel protected by electro-galvanized coating against corrosion
- facilitates and speeds up installation of light wooden garden structures

	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
OP0353430	35 x 34 x 30	2	50	-	-

Retail packaging – bags

Universal expansion plug for solid materials BKA





- Material: polypropylene copolymer dowel
- Purpose: for solid building materials such as: plain concrete C20/25, solid ceramic brick class 15, solid silicate brick class 15

	mm	mm	mm	mm		mm	mm	mm	pcs per bag	bags per box	bags per masterbox
BKA06030	3,5-4	-	6	30	-	6	-	30	32	12	72
BKA08040	4-5	-	80	40	-	8	5	40	16	12	72
BKA10050	5-6	-	10	50	-	10	10	50	9	12	72
BKA12060	6-8	-	12	60	-	12	20	60	5	12	72
BKA12080	8	-	12	80	-	12	5	80	4	12	72
BKA14080	10	-	14	80	-	14	10	80	3	12	72

Universal expansion plug sleeve BKUP

NYLON





- Material: polyamide dowel
- Purpose: for mounting elements in plasterboard up to 12.50 mm thick and in ceramic hollow brick Porotherm cl.15

	mm	mm	mm	mm		mm	mm	mm	pcs per bag	bags per box	bags per masterbox
BKUP06035	3,5	-	6	35	-	6	20	35	20	12	72
BKUP08050	4,5	-	8	50	-	8	10	50	8	12	72
BKUP10060	5	-	10	60	-	10	30	60	5	12	72

Expansion plug with screw with countersunk head BR





- Material: polypropylene copolymer dowel, electro-galvanized steel screw
- Purpose: for solid building materials such as: plain concrete C20/25, solid ceramic brick class 15, solid silicate brick class 15

	mm	mm	mm	mm		mm	mm	mm	pcs per bag	bags per box	bags per masterbox
BR0635030	3,5	30	6	30	PZ 2	6	-	30	24	12	72
BR0635035	3,5	35	6	30	PZ 2	6	5	30	22	12	72
BR0635040	3,5	40	6	30	PZ 2	6	10	30	20	12	72
BR0635050	3,5	50	6	30	PZ 2	6	20	30	18	12	72
BR0840045	4	45	8	40	PZ 2	8	5	40	13	12	72
BR0840050	4	50	8	40	PZ 2	8	10	40	12	12	72
BR0840060	4	60	8	40	PZ 2	8	20	40	10	12	72
BR1050060	5	60	10	50	PZ 2	10	10	50	7	12	72
BR1050080	5	80	10	50	PZ 2	10	30	50	6	12	72

Universal expansion plug with countersunk head screw BKU





- Material: polyamide dowel, electro-galvanized steel screw
- Purpose: for mounting elements in plasterboard up to 12.50 mm thick and in porous ceramic hollow brick

	mm	mm	mm	mm		mm	mm	mm	pcs per bag	bags per box	bags per masterbox
BKU0635045	3,5	45	6	35	PZ 2	6	10	35	14	12	72
BKU0635060	3,5	60	6	35	PZ 2	6	25	35	12	12	72
BKU0845060	4,5	60	8	50	PZ 2	8	10	50	6	12	72
BKU0845080	4,5	80	8	50	PZ 2	8	30	50	5	12	72
BKU1050080	5	80	10	60	PZ 2	10	20	60	4	12	72

Expansion plug with hex head screw BK





- Material: polypropylene copolymer dowel, electro-galvanized steel screw
- Purpose: for solid building materials such as: plain concrete C20/25, solid ceramic brick class 15, solid silicate brick class 15

	mm	mm	mm	mm		mm	mm	mm	pcs per bag	bags per box	bags per masterbox
BK1060060	6	60	10	50	10	10	10	50	8	12	72
BK1060080	6	80	10	50	10	10	30	50	7	12	72
BK1060100	6	100	10	50	10	10	50	50	6	12	72
BK1280060	8	60	12	60	13	12	-	60	5	13	72
BK1280080	8	80	12	60	13	12	20	60	4	12	72
BK1280100	8	100	12	80	13	12	20	80	3	12	72
BK1280120	8	120	12	80	13	12	40	80	3	12	72

Expansion plug with straight hook BKHP





- Material: polypropylene copolymer dowel, electro-galvanized steel screw with straight hook
- Purpose: for solid building materials such as: plain concrete C20/25, solid ceramic brick class 15, solid silicate brick class 15

	mm	mm	mm	mm		mm	mm	mm	pcs per bag	bags per box	bags per masterbox
BKHP06	4	40	6	30	-	6	-	30	14	12	72
BKHP08	5	45	8	40	-	8	-	40	9	12	72
BKHP10	6	54	10	50	-	10	-	50	6	12	72
BKHP12	6,5	65	12	60	-	12	-	60	4	12	72

Universal expansion plug with straight hook BKUHP

NYLON





- Material: polyamide dowel, electro-galvanized steel screw with straight hook
- Purpose: for mounting elements in plasterboard up to 12.50 mm thick and in porous ceramic hollow brick

	mm	mm	mm	mm		mm	mm	mm	pcs per bag	bags per box	bags per masterbox
BKUHP06045	3,5	45	6	35	-	6	-	35	8	12	72
BKUHP08065	4,5	65	8	50	-	8	-	50	5	12	72

Expansion plug with ceiling hook BKHS





- Material: polypropylene copolymer dowel, electro-galvanized steel screw with ceiling hook
- Purpose: for solid building materials such as: plain concrete C20/25, solid ceramic brick class 15, solid silicate brick class 15

	mm	mm	mm	mm		mm	mm	mm	pcs per bag	bags per box	bags per masterbox
BKHS06	4	35	6	30	-	6	-	30	12	12	72
BKHS08	5	42	8	40	-	8	-	40	6	12	72
BKHS10	6	52	10	50	-	10	-	50	4	12	72
BKHS12	7	62	12	60	-	12	-	60	2	12	72

Universal expansion plug with ceiling hook BKUHS

NYLON





- Material: polyamide dowel, electro-galvanized steel screw with ceiling hook
- Purpose: for mounting elements in plasterboard up to 12.50 mm thick and in porous ceramic hollow brick

	mm	mm	mm	mm		mm	mm	mm	pcs per bag	bags per box	bags per masterbox
BKUHS06065	3,5	65	6	35	-	6	-	35	6	12	72
BKUHS08083	4,5	83	8	50	-	8	-	50	4	12	72

Expansion plug with eye hook BKHOO





- Material: polypropylene copolymer dowel, electro-galvanized steel screw with swing hook
- Purpose: for solid building materials such as: plain concrete C20/25, solid ceramic brick class 15, solid silicate brick class 15

	mm	mm	mm	mm		mm	mm	mm	pcs per bag	bags per box	bags per masterbox
BKHOO12	8	90	12	80	-	12	-	80	2	12	72

OLA plug with screw BOLAWK

NYLON





- Material: polyamide dowel, electro-galvanized steel screw
- Purpose: for mounting light elements on plasterboards with a thickness of up to 12.50 mm

	mm	mm	mm	mm		mm	mm	mm	pcs per bag	bags per box	bags per masterbox
BOLAWK	3,5	60	-	-	PZ 2	10	-	-	6	12	72

OLA plug with angle hook BOLAHP

NYLON





- Material: polyamide dowel, electro-galvanized steel screw with straight hook
- Purpose: for mounting light elements on plasterboards with a thickness of up to 12.50 mm

	mm	mm	mm	mm		mm	mm	mm	pcs per bag	bags per box	bags per masterbox
BOLAHP	3,5	62	-	-	-	10	-	-	4	12	72

OLA plug with round hook BOLAHS

NYLON





- Material: polyamide dowel, electro-galvanized steel screw with ceiling hook
- Purpose: for mounting light elements on plasterboards with a thickness of up to 12.50 mm

	mm	mm	mm	mm		mm	mm	mm	pcs per bag	bags per box	bags per masterbox
BOLAHS	3,5	62	-	-	-	10	-	-	4	12	72

Hardened screw for wood with countersunk head WK





- Material: electro-galvanized steel screw
- Purpose: for wood, chipboard, plywood, plasterboard
- CE - screws made in accordance with EN:14592, with CE marking
- SMALL PACKAGING

	mm	mm	mm	mm max		mm	mm	mm	pcs per bag	bags per box	bags per masterbox
WK3012*	3	12	full	-	PZ 1	-	-	18	65	45	-
WK3016	3	16	full	-	PZ 1	-	-	18	60	45	-
WK3020	3	20	full	-	PZ 1	-	2	18	60	45	-
WK3025	3	25	full	-	PZ 1	-	7	18	50	45	-
WK3030	3	30	full	-	PZ 1	-	12	18	45	45	-
WK3035	3	35	full	-	PZ 1	-	17	18	40	45	-
WK3040	3	40	full	-	PZ 1	-	22	18	35	45	-
WK3516*	3,5	16	full	-	PZ 2	-	-	21	50	45	-
WK3520	3,5	20	full	-	PZ 2	-	-	20	45	45	-
WK3525	3,5	25	full	-	PZ 2	-	4	21	45	45	-
WK3530	3,5	30	full	-	PZ 2	-	9	21	35	45	-
WK3535	3,5	35	full	-	PZ 2	-	14	21	32	45	-
WK3540	3,5	40	full	-	PZ 2	-	19	21	30	45	-
WK3545	3,5	45	full	-	PZ 2	-	24	21	25	45	-
WK3550	3,5	50	full	-	PZ 2	-	29	21	22	45	-
WK4016*	4	16	full	-	PZ 2	-	-	24	45	45	-
WK4020	4	20	full	-	PZ 2	-	-	24	40	45	-
WK4025	4	25	full	-	PZ 2	-	1	24	35	45	-
WK4030	4	30	full	-	PZ 2	-	6	24	32	45	-
WK4035	4	35	full	-	PZ 2	-	11	24	28	45	-
WK4040	4	40	full	-	PZ 2	-	16	24	24	45	-
WK4045	4	45	full	-	PZ 2	-	21	24	22	45	-
WK4050	4	50	full	-	PZ 2	-	26	24	20	45	-
WK4060	4	60	full	-	PZ 2	-	36	24	15	45	-
WK4070	4	70	60	-	PZ 2	-	46	24	14	45	-
WK5025	5	25	full	-	PZ 2	-	-	30	22	45	-
WK5030	5	30	full	-	PZ 2	-	-	30	20	45	-
WK5035	5	35	full	-	PZ 2	-	5	30	18	45	-
WK5040	5	40	full	-	PZ 2	-	10	30	16	45	-
WK5045	5	45	full	-	PZ 2	-	15	30	15	45	-
WK5050	5	50	full	-	PZ 2	-	20	30	12	45	-
WK5060	5	60	full	-	PZ 2	-	30	30	11	45	-
WK5070	5	70	60	-	PZ 2	-	40	30	9	45	-
WK5080	5	80	60	-	PZ 2	-	44	36	7	45	-
WK6030	6	30	full	-	PZ 3	-	-	30	11	45	-
WK6040	6	40	full	-	PZ 3	-	4	36	10	45	-
WK6050	6	50	full	-	PZ 3	-	14	36	9	45	-
WK6060	6	60	full	-	PZ 3	-	24	36	8	45	-
WK6070	6	70	60	-	PZ 3	-	35	36	6	45	-
WK6080	6	80	60	-	PZ 3	-	44	36	5	45	-

* not subject to EN 14592

Hanger bolt BDW





- Material: double-threaded bolt, galvanized steel
- Purpose: for joining wooden elements with other fasteners, e.g. nuts, dowels with metric thread, it is also a component of sanitary fixings

	mm	mm	mm	mm		mm	mm	mm	pcs per bag	bags per box	bags per masterbox
BDW08060	8	60	-	-	6 / T25	-	-	-	5	12	72
BDW08080	8	80	-	-	6 / T25	-	-	-	5	12	72
BDW08100	8	100	-	-	6 / T25	-	-	-	5	12	72
BDW08120	8	120	-	-	6 / T25	-	-	-	5	12	72
BDW08140	8	140	-	-	6 / T25	-	-	-	5	12	72
BDW08160	8	160	-	-	6 / T25	-	-	-	5	12	72

Phosphated drywall screw with bugle head for steel profiles MM



- Material: steel screw, phosphated
- Purpose: the screw is used to fasten plasterboards to the supporting structure made of steel profiles (drilling capacity up to 0.6 mm)
- SMALL PACKAGING - TYPE M

	mm	mm	mm	mm max		mm	mm	mm	pcs per bag	bags per box	bags per masterbox
MM35025	3,5	25	full	0,6	PH 2	-	-	-	200	25	-
MM35035	3,5	35	full	0,6	PH 2	-	-	-	200	20	-
MM35045	3,5	45	full	0,6	PH 2	-	-	-	100	20	-
MM35055	3,5	55	full	0,6	PH 2	-	-	-	100	20	-
MM42070	4,2	70	50	0,6	PH 2	-	-	-	50	20	-
MM42090	4,2	90	63,5	0,6	PH 2	-	-	-	50	30	-
MM48100	4,8	100	63,5	0,6	PH 2	-	-	-	25	30	-
MM48120	4,8	120	63,5	0,6	PH 2	-	-	-	25	30	-
BM35025	3,5	25	full	0,6	PH 2	-	-	-	100	12	72
BM35035	3,5	35	full	0,6	PH 2	-	-	-	50	12	72
BM35045	3,5	45	full	0,6	PH 2	-	-	-	25	12	72
BM35055	3,5	55	full	0,6	PH 2	-	-	-	25	12	72

Phosphated drywall screw with bugle head for timber DM



- Material: steel screw, phosphated
- Purpose: the screw is used for fixing plasterboards to the supporting structure made of wooden profiles
- SMALL PACKAGING - TYPE D

	mm	mm	mm	mm max		mm	mm	mm	pcs per bag	bags per box	bags per masterbox
DM35025	3,5	25	full	-	PH 2	-	-	-	200	25	-
DM35035	3,5	35	full	-	PH 2	-	-	-	200	20	-
DM35045	3,5	45	full	-	PH 2	-	-	-	100	20	-
DM35055	3,5	55	full	-	PH 2	-	-	-	100	20	-
DM42070	4,2	70	50	-	PH 2	-	-	-	50	20	-
DM42090	4,2	90	63,5	-	PH 2	-	-	-	50	30	-
DM48100	4,8	100	63,5	-	PH 2	-	-	-	25	30	-
DM48120	4,8	120	63,5	-	PH 2	-	-	-	25	30	-
BD35025	3,5	25	full	-	PH 2	-	-	-	100	12	72
BD35035	3,5	35	full	-	PH 2	-	-	-	50	12	72
BD35045	3,5	45	full	-	PH 2	-	-	-	25	12	72
BD35055	3,5	55	full	-	PH 2	-	-	-	25	12	72
BD42070	4,2	70	50	-	PH 2	-	-	-	25	12	72
BD42090	4,2	90	63,5	-	PH 2	-	-	-	25	12	72

Self-drilling drywall screw with countersunk head phosphated KSSF



- Material: steel screw, phosphated
- Purpose: for installing drywall and screwing profiles from sheets (drilling capacity up to 2.0 mm)
- SMALL PACKAGING

	mm	mm	mm	mm max		mm	mm	mm	pcs per bag	bags per box	bags per masterbox
KMSF3525	3,5	25	-	2	PH 2	-	-	-	200	30	-
KMSF3535	3,5	35	-	2	PH 2	-	-	-	100	30	-
KMSF3545	3,5	45	-	2	PH 2	-	-	-	100	25	-
BSF3525	3,5	25	-	2	PH 2	-	-	-	50	12	72
BSF3535	3,5	35	-	2	PH 2	-	-	-	50	12	72
BSF3545	3,5	45	-	2	PH 2	-	-	-	40	12	72

Self-drilling screw TEX phosphated BTEXF





- Material: phosphated steel screw
- Purpose: for screwing sheet metal profiles when assembling plasterboard (drilling capacity up to 2.0 mm)

	mm	mm	mm	mm max		mm	mm	mm	pcs per bag	bags per box	bags per masterbox
BTEXF1003595	3,5	9,5	full	2	PH 2	-	-	-	100	12	72
BTEXF1003911	3,9	11	full	2	PH 2	-	-	-	100	12	72
BTEXF2003595	3,5	9,5	full	2	PH 2	-	-	-	200	12	72
BTEXF2003911	3,9	11	full	2	PH 2	-	-	-	200	12	72

Self-drilling screw TEX zinc plated BTEXOC





- Material: galvanized steel screw
- Purpose: for screwing sheet metal profiles when assembling plasterboard (drilling capacity up to 2.0 mm)

	mm	mm	mm	mm max		mm	mm	mm	pcs per bag	bags per box	bags per masterbox
BTEXOC1003595	3,5	9,5	full	2	PH 2	-	-	-	100	12	72
BTEXOC2003595	3,5	9,5	full	2	PH 2	-	-	-	200	12	72

Roofing screw BFD





	mm	mm	mm	mm max		mm	mm	mm	pcs per bag	bags per box	bags per masterbox
BFD48020OC	4,8	20	full	2,5	8	-	-	OC	10	12	72
BFD48207016	4,8	20	full	2,5	8	-	-	RAL7016	10	12	72
BFD48207024	4,8	20	full	2,5	8	-	-	RAL7024	10	12	72
BFD48208017	4,8	20	full	2,5	8	-	-	RAL8017	10	12	72
BFD48209005	4,8	20	full	2,5	8	-	-	RAL9005	10	12	72
BFD48209010	4,8	20	full	2,5	8	-	-	RAL9010	10	12	72
BFD48035OC	4,8	35	full	2,5	8	-	-	OC	10	12	72
BFD48353005	4,8	35	full	2,5	8	-	-	RAL3005	10	12	72
BFD48353009	4,8	35	full	2,5	8	-	-	RAL3009	10	12	72
BFD48353011	4,8	35	full	2,5	8	-	-	RAL3011	10	12	72
BFD48357016	4,8	35	full	2,5	8	-	-	RAL7016	10	12	72
BFD48357024	4,8	35	full	2,5	8	-	-	RAL7024	10	12	72
BFD48358004	4,8	35	full	2,5	8	-	-	RAL8004	10	12	72
BFD48358017	4,8	35	full	2,5	8	-	-	RAL8017	10	12	72
BFD48358019	4,8	35	full	2,5	8	-	-	RAL8019	10	12	72
BFD48359005	4,8	35	full	2,5	8	-	-	RAL9005	10	12	72
BFD48359010	4,8	35	full	2,5	8	-	-	RAL9010	10	12	72
BFD48060OC	4,8	60	full	2,5	8	-	-	OC	5	12	72
BFD48608017	4,8	60	full	2,5	8	-	-	RAL8017	5	12	72

Aluminum blind rivet NITM





- Material: steel pin, aluminum connecting rivet
- Purpose: for joining sheets and other steel elements fixed to steel substrates
- SMALL PACKAGING

	mm	mm	mm	mm		mm	mm	mm	pcs per bag	bags per box	bags per masterbox
NITM3006	3	6	-	-	-	3,1	1,5 - 3,5	-	50	30	-
NITM3008	3	8	-	-	-	3,1	3,5 - 5,0	-	50	30	-
NITM3010	3	10	-	-	-	3,1	5 - 7	-	50	30	-
NITM3012	3	12	-	-	-	3,1	7 - 9	-	50	30	-
NITM4006	4	6	-	-	-	4,1	1 - 3	-	50	30	-
NITM4008	4	8	-	-	-	4,1	3 - 5	-	50	30	-
NITM4010	4	10	-	-	-	4,1	5,0 - 6,5	-	50	30	-
NITM4012	4	12	-	-	-	4,1	6,5 - 8,5	-	50	30	-
NITM4014	4	14	-	-	-	4,1	8,5 - 10,5	-	50	30	-
NITM4016	4	16	-	-	-	4,1	8,5 - 12,5	-	50	30	-
NITM4018	4	18	-	-	-	4,1	12,5 - 14,5	-	50	30	-
NITM4020	4	20	-	-	-	4,1	12,5 - 16,5	-	50	30	-
NITM4806	4,8	6	-	-	-	4,9	1,5 - 2,5	-	50	30	-
NITM4808	4,8	8	-	-	-	4,9	2,5 - 4,0	-	50	30	-
NITM4810	4,8	10	-	-	-	4,9	4 - 6	-	50	30	-
NITM4812	4,8	12	-	-	-	4,9	6 - 8	-	50	30	-
NITM4814	4,8	14	-	-	-	4,9	8 - 10	-	50	30	-
NITM4816	4,8	16	-	-	-	4,9	8 -12	-	50	30	-
NITM4818	4,8	18	-	-	-	4,9	12 - 14	-	50	30	-
NITM4820	4,8	20	-	-	-	4,9	12 - 15	-	50	30	-
NITM4822	4,8	22	-	-	-	4,9	16 - 18	-	50	30	-
NITM4824	4,8	24	-	-	-	4,9	18 - 20	-	50	30	-
NITM4830	4,8	30	-	-	-	4,9	20 - 25	-	50	30	-

STALCO
PERFECT



FASTENING SYSTEMS

General fasteners

Quick-fix expansion plug KSM



- Material: polypropylene sleeve, steel nail, electro-galvanised
- Purpose: for multipoint fixings in substrates of: normal concrete, ceramic solid brick, silicate solid brick, autoclaved cellular concrete

	mm	mm	mm	mm		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
KSM06040200	3,8	44	6	40	PZ 2	6	10	30	200	2400	168000
KSM06040100	3,8	44	6	40	PZ 2	6	10	30	100	1800	126000
KSM06060200	3,8	64	6	60	PZ 2	6	30	30	200	1800	126000
KSM06060100	3,8	64	6	60	PZ 2	6	30	30	100	1200	84000
KSM06080100	3,8	84	6	80	PZ 2	6	50	30	100	1200	84000
KSM08045100	4,8	50	8	45	PZ 2	8	5	40	100	1200	84000
KSM08060100	4,8	65	8	60	PZ 2	8	20	40	100	900	84000
KSM08080100	4,8	85	8	80	PZ 2	8	40	40	100	900	63000
KSM08100100	4,8	105	8	100	PZ 2	8	60	40	100	600	63000
KSM08120100	4,8	125	8	120	PZ 2	8	80	40	100	600	42000
KSM08140100	4,8	145	8	140	PZ 2	8	100	40	100	600	42000
KSM08160100	4,8	165	8	160	PZ 2	8	120	40	100	600	42000
KSM10080050	6,8	86	10	80	PZ 3	10	30	50	50	600	42000
KSM10100050	6,8	106	10	100	PZ 3	10	50	50	50	450	42000
KSM10120050	6,8	126	10	120	PZ 3	10	70	50	50	450	31500
KSM10140050	6,8	146	10	140	PZ 3	10	90	50	50	450	31500
KSM10160050	6,8	166	10	160	PZ 3	10	110	50	50	300	31500
KSM10180050	6,8	186	10	180	PZ 3	10	130	50	50	300	21000
KSM10200050	6,8	206	10	200	PZ 3	10	150	50	50	300	21000

Quick-fix expansion plug with flange KSMK



- Material: polypropylene sleeve, steel nail, electro-galvanised
- Purpose: for multipoint fixings in substrates of: normal concrete, ceramic solid brick, silicate solid brick, autoclaved cellular concrete

	mm	mm	mm	mm		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
KSMK06040200	3,8	44	6	40	PZ 2	6	10	30	200	2400	168000
KSMK06040100	3,8	44	6	40	PZ 2	6	10	30	100	1800	126000
KSMK06060100	3,8	64	6	60	PZ 2	6	30	30	100	1200	84000
KSMK06080100	3,8	84	6	80	PZ 2	6	50	30	100	900	63000
KSMK08060100	4,8	65	8	60	PZ 2	8	20	40	100	900	63000

Ceiling wedge anchor ZSP



- Material: galvanized carbon steel
- Purpose: for solid building materials such as: plain concrete C20/25

	mm	mm	mm	mm		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
ZSP635	2,5	43	6	35	-	6	10	25	100	1800	-
ZSP665	2,5	73	6	65	-	6	40	25	100	1200	-

Ceiling wire anchor ZSPO



- Material: galvanized carbon steel
- Purpose: for solid building materials such as: plain concrete C20/25

	mm	mm	mm	mm		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
ZSPO6	-	-	6	60	-	6	-	25	100	1200	-

Metal frame anchor KO



- Material: sleeve and screw made of carbon steel, galvanised
- Purpose: for fastening window or door frames and other fastenings in substrates made of: normal concrete, ceramic solid brick, silicate solid brick, hollow silicate brick (with holes), autoclaved aerated concrete

	mm	mm	mm	mm		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
KO10072	-	-	10	72	PZ 3	10	32* / 12**	40* / 60**	100	900	-
KO10092	-	-	10	92	PZ 3	10	52* / 32**	40* / 60**	100	600	-
KO10112	-	-	10	112	PZ 3	10	72* / 52**	40* / 60**	100	600	-
KO10132	-	-	10	132	PZ 3	10	92* / 72**	40* / 60**	50	600	-
KO10152	-	-	10	152	PZ 3	10	112* / 92**	40* / 60**	50	450	-
KO10182	-	-	10	182	PZ 3	10	142* / 122	40* / 60**	50	450	-
KO10202	-	-	10	202	PZ 3	10	162* / 142**	40* / 60**	50	300	-

Frame fixing with zinc plated hex head screw TXK



- Material: dowel made of high-grade polypropylene (nylon), galvanized steel screw with a countersunk head and POZIDRIV socket
- Purpose: for construction materials such as plain concrete, cellular concrete, solid ceramic brick, solid silicate brick, hollow silicate brick, perforated brick, ceramic block, silicate block

	mm	mm	mm	mm		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
TXK08060	5,7	65	7,8	60	10 / T25	8	10	≥50	50	900	-
TXK08080	5,5	85	7,8	80	10 / T25	8	30	50	50	600	-
TXK08100	5,5	105	7,8	100	10 / T25	8	50	50	50	600	-
TXK08120	5,5	125	8	120	10 / T25	8	70	50	50	450	-
TXK08140	5,5	145	8	140	10 / T25	8	90	50	50	450	-
TXK08160	5,5	165	8	160	10 / T25	8	110	50	50	450	-
TXK10080	7,0	85	9,7	80	13 / T40	10	15	≥70	25	450	-
TXK10100	6,9	105	9,7	100	13 / T40	10	35	65	25	300	-
TXK10120	6,9	125	9,7	120	13 / T40	10	55	65	25	300	-
TXK10140	6,9	145	10	140	13 / T40	10	75	65	25	225	-
TXK10160	6,9	165	10	160	13 / T40	10	95	65	25	225	-
TXK10180	6,9	185	10	180	13 / T40	10	115	65	25	225	-
TXK10200	6,9	205	10	200	13 / T40	10	135	65	25	150	-
TXK10225	6,9	230	10	225	13 / T40	10	160	65	15	60	-
TXK10250	6,9	255	10	250	13 / T40	10	185	65	15	60	-
TXK10275	6	280	10	275	13 / T40	10	210	65	15	60	-
TXK10300	6,9	305	10	300	13 / T40	10	235	65	15	60	-

Frame fixing with zinc plated hex head screw TXK



	mm	mm	mm	mm		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
TXK12080	8	85	12	80	13 / T40	12	20	60	20	80	-
TXK12100	8	105	12	100	13 / T40	12	40	60	20	80	-
TXK12120	8	125	12	120	13 / T40	12	60	60	20	80	-
TXK12140	8	145	12	140	13 / T40	12	80	60	20	80	-
TXK12160	8	165	12	160	13 / T40	12	100	60	20	80	-

Frame fixing with zinc plated hex head screw TXKA4



- Material: sleeve made of high-quality polyamide (nylon), screw with hexagon head and TORX socket, stainless steel A4/316
- Purpose: for multipoint fixings in substrates made of: normal concrete, solid ceramic bricks, solid calcium-silicate bricks, expanded clay hollow bricks (with holes), hollow calcium-silicate bricks, elements made of grid concrete, autoclaved cellular concrete, gypsum cardboard panels

	mm	mm	mm	mm		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
TXKA408060	5,7	65	7,8	60	10 / T25	8	10	50	20	240	-
TXKA408080	5,5	85	8	80	10 / T25	8	30	50	20	240	-
TXKA408100	5,5	105	8	100	10 / T25	8	50	50	20	240	-
TXKA410080	7,0	85	9,7	80	13 / T40	10	15	65	10	120	-
TXKA410100	6,9	105	10	100	13 / T40	10	35	65	10	120	-
TXKA410120	6,9	125	10	120	13 / T40	10	55	65	10	120	-

Frame fixing with zinc plated countersunk head screw TXS



- Material: dowel made of high-grade polypropylene (nylon), galvanized steel screw with a countersunk head and POZIDRIV socket
- Purpose: for construction materials such as plain concrete, cellular concrete, solid ceramic brick, solid silicate brick, hollow silicate brick, perforated brick, ceramic block, silicate block

	mm	mm	mm	mm		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
TXS08060	5,7	65	7,8	60	T25	8	10	50	50	900	-
TXS08080	5,5	85	8	80	T25	8	30	50	50	600	-
TXS08100	5,5	105	8	100	T25	8	50	50	50	600	-
TXS08120	5,5	125	8	120	T25	8	70	50	50	450	-
TXS08140	5,5	145	8	140	T25	8	90	50	50	450	-
TXS08160	5,5	165	8	160	T25	8	110	50	50	450	-
TXS10080	7,0	85	9,7	80	T40	10	15	65	25	450	-
TXS10100	6,9	105	10	100	T40	10	35	65	25	300	-
TXS10120	6,9	125	10	120	T40	10	55	65	25	300	-
TXS10140	6,9	145	10	140	T40	10	75	65	25	300	-
TXS10160	6,9	165	10	160	T40	10	95	65	25	225	-
TXS10180	6,9	185	10	180	T40	10	115	65	25	225	-
TXS10200	6,9	205	10	200	T40	10	135	65	25	150	-

Frame fixing with zinc plated countersunk head screw TXSA4



- Material: sleeve made of high-quality polyamide (nylon), countersunk screw with TORX socket, stainless steel A4/316
- Purpose: for multipoint fixings in substrates made of: normal concrete, solid ceramic bricks, solid calcium-silicate bricks, expanded clay hollow bricks (with holes), hollow calcium-silicate bricks, elements made of grid concrete, autoclaved cellular concrete, gypsum cardboard panels

	mm	mm	mm	mm		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
TXSA408060	5,7	65	7,8	60	T25	8	10	50	20	240	-
TXSA408080	5,5	85	8	80	T25	8	30	50	20	240	-

Universal expansion plug sleeve RX



- Material: polyamide sleeve
- Purpose: for multipoint fixings in substrates made of: normal concrete, solid ceramic bricks, solid calcium-silicate bricks, expanded clay hollow bricks (with holes), hollow calcium-silicate bricks, elements made of grid concrete, autoclaved cellular concrete, gypsum cardboard panels

	mm	mm	mm	mm		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
RX06030	4,5-5	-	6	30	-	6	-	30	100	1200	-
RX08040	4,5-6	-	8	40	-	8	-	40	50	600	-
RX10050	6-8	-	10	50	-	10	-	50	50	600	-
RX12060	8-10	-	12	60	-	12	-	60	25	300	-

Universal expansion plug with countersunk head screw RXS



- Material: polyamide sleeve, electro-galvanized steel screw
- Purpose: for mounting elements in substrates such as: concrete, stone, brick, aerated concrete, block, etc.

	mm	mm	mm	mm		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
RXS0640040	4	40	5,8	30	PZ 2	6	10	30	100	1200	-
RXS0640050	4	50	6	30	PZ 2	6	20	30	100	1200	-
RXS0640060	4	60	6	30	PZ 2	6	30	30	100	1200	-
RXS0845050	4,5	50	7,8	40	PZ 2	8	10	40	50	600	-
RXS0845060	4,5	60	8	40	PZ 2	8	20	40	50	600	-
RXS0845080	4,5	80	8	40	PZ 2	8	40	40	50	600	-
RXS1060060	6	60	9,6	50	PZ 3	10	10	50	25	300	-
RXS1060080	6	80	10	50	PZ 3	10	30	50	25	300	-
RXS1060100	6	100	10	50	PZ 3	10	50	50	25	300	-

Universal expansion plug with hex head screw RXK



- Material: polyamide sleeve, electro-galvanized steel screw
- Purpose: for mounting elements in substrates such as: concrete, stone, brick, aerated concrete, block, etc.

	mm	mm	mm	mm		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
RXK1060060	6	60	9,6	50	17	10	10	50	25	300	-
RXK1060080	6	80	10	50	17	10	30	50	25	300	-
RXK1060100	6	100	10	50	17	10	50	50	25	300	-
RXK1280070	8	70	11,6	60	19	12	10	60	25	450	-
RXK1280080	8	80	12	60	19	12	20	60	25	450	-
RXK1280100	8	100	12	60	19	12	40	60	25	300	-
RXK1280120	8	120	12	60	19	12	60	60	25	300	-

Universal expansion plug with angle hook RXHP



- Material: polyamide sleeve, electro-galvanized steel screw with straight hook
- Purpose: for mounting elements in substrates such as: concrete, stone, brick, aerated concrete, block, etc.

	mm	mm	mm	mm		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
RXHP064036	4	36	6	30	-	6	-	30	50	600	-
RXHP084546	4,5	46	8	40	-	8	-	40	25	300	-

Universal expansion plug with round hook RXHS



- Material: polyamide sleeve, electro-galvanized steel screw with ceiling hook
- Purpose: for mounting elements in substrates such as: concrete, stone, brick, aerated concrete, block, etc.

	mm	mm	mm	mm		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
RXHS064036	4	36	5,8	30	-	6	-	30	50	600	-
RXHS084546	4,5	46	7,8	40	-	8	-	40	25	300	-

Driva nylon plug for plasterboard BDRIVANYLON

NYLON



- Material: DRIVA NYLON is made of polyamide, DRIVA ZNAL is made of zinc and aluminum alloy
- Purpose: for mounting elements in plasterboard

	mm	mm	mm	mm		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
DRIVANYLON	3,5-4,2	0	13	22	PH2/ PH3	7	-	-	200	3600	-

Driva ZnAl plug for plasterboard BDRIVAZNAL



- Made of zinc and aluminum alloy
- For mounting elements in plasterboard

	mm	mm	mm	mm		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
DRIVAZNAL	4,2	32	13	30	PH2/ PH3	8	8	-	100	1800	-

Metal hammer-in anchor for plasterboard with screw KWM



- quick fastening of even large quantities of anchors in a short time
- easy hammer-in installation without the need for drilling or creating dust
- anchors made entirely of metal — recommended especially for buildings requiring enhanced fire safety
- the design allows easy driving in and prevents rotation in the substrate during installation
- the anchor can be easily removed, leaving only a small hole in the wall

	mm	mm	mm	mm		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
KWM304040	4	40	12	30	PZ 2	-	5	20	100	1800	-

Insulation fasteners

Insulation fixing plug with screw-in metal pin KTS



- Material: dowel made of high-quality polypropylene copolymer, steel expanding mandrel coated with original polyamide with glass fiber, limiting the thermal bridge (mandrel head)
- Purpose: for installing thermal insulation in building materials such as: class C concrete, ceramic brick, aggregate concrete, cellular concrete.
- Max. insulation thickness: 260 mm

	mm	mm	mm	mm		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
KTS08095	5,6	100	8	95	T30	8	ABCD 60 ; E 40	ABCD ≥25 ; E ≥45	200	-	11200
KTS08115	5,6	120	8	115	T30	8	ABCD 80 ; E 60	ABCD ≥25 ; E ≥45	200	-	11200
KTS08135	5,6	140	8	135	T30	8	ABCD 100 ; E 80	ABCD ≥25 ; E ≥45	200	-	11200
KTS08155	5,6	160	8	155	T30	8	ABCD 120 ; E 100	ABCD ≥25 ; E ≥45	200	-	11200
KTS08175	5,6	180	8	175	T30	8	ABCD 140 ; E 120	ABCD ≥25 ; E ≥45	200	-	9600
KTS08195	5,6	200	8	195	T30	8	ABCD 160 ; E 140	ABCD ≥25 ; E ≥45	200	-	9600
KTS08215	5,6	220	8	215	T30	8	ABCD 180 ; E 160	ABCD ≥25 ; E ≥45	100	-	5600
KTS08235	5,6	240	8	235	T30	8	ABCD 200 ; E 180	ABCD ≥25 ; E ≥45	100	-	5600
KTS08255	5,6	260	8	255	T30	8	ABCD 220 ; E 200	ABCD ≥25 ; E ≥45	100	-	5600
KTS08275	5,6	280	8	275	T30	8	ABCD 240 ; E 220	ABCD ≥25 ; E ≥45	100	-	4800
KTS08295	5,6	300	8	295	T30	8	ABCD 260 ; E 240	ABCD ≥25 ; E ≥45	100	-	4800
KTS08315	5,6	320	8	315	T30	8	ABCD 280 ; E 260	ABCD ≥25 ; E ≥45	100	-	5600
KTS08335	5,6	340	8	335	T30	8	ABCD 300 ; E 280	ABCD ≥25 ; E ≥45	100	-	5600
KTS08355	5,6	360	8	355	T30	8	ABCD 320 ; E 300	ABCD ≥25 ; E ≥45	100	-	5600

Insulation fixing plug with drive-in metal pin KTM



- Material: dowel made of high-quality polypropylene copolymer, steel expanding mandrel coated with original polyamide with glass fiber, limiting the thermal bridge (mandrel head)
- Purpose: for installing thermal insulation in building materials such as: class C concrete, ceramic brick, aggregate concrete, cellular concrete
- Max. insulation thickness: 260

	mm	mm	mm	mm		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
KTM08095	4,8	100	8	95	-	8	ABCD 60 ; E 40	ABCD ≥25 ; E ≥45	200	-	11200
KTM08115	4,8	120	8	115	-	8	ABCD 80 ; E 60	ABCD ≥25 ; E ≥45	200	-	11200
KTM08135	4,8	140	8	135	-	8	ABCD 100 ; E 80	ABCD ≥25 ; E ≥45	200	-	11200
KTM08155	4,8	160	8	155	-	8	ABCD 120 ; E 100	ABCD ≥25 ; E ≥45	200	-	11200
KTM08175	4,8	180	8	175	-	8	ABCD 140 ; E 120	ABCD ≥25 ; E ≥45	200	-	9600
KTM08195	4,8	200	8	195	-	8	ABCD 160 ; E 140	ABCD ≥25 ; E ≥45	200	-	9600
KTM08215	4,8	220	8	215	-	8	ABCD 180 ; E 160	ABCD ≥25 ; E ≥45	100	-	5600
KTM08235	4,8	240	8	235	-	8	ABCD 200 ; E 180	ABCD ≥25 ; E ≥45	100	-	5600
KTM08255	4,8	260	8	255	-	8	ABCD 220 ; E 200	ABCD ≥25 ; E ≥45	100	-	5600
KTM08275	4,8	280	8	275	-	8	ABCD 240 ; E 220	ABCD ≥25 ; E ≥45	100	-	4800
KTM08295	4,8	300	8	295	-	8	ABCD 260 ; E 240	ABCD ≥25 ; E ≥45	100	-	4800
KTM08315	4,8	320	8	315	-	8	ABCD 280 ; E 260	ABCD ≥25 ; E ≥45	100	-	5600
KTM08335	4,8	340	8	335	-	8	ABCD 300 ; E 280	ABCD ≥25 ; E ≥45	100	-	5600
KTM08355	4,8	360	8	355	-	8	ABCD 320 ; E 300	ABCD ≥25 ; E ≥45	100	-	5600

Insulation fixing plug with polyamide pin KTP



- Material: dowel made of high-quality polypropylene copolymer, expanding mandrel made of original polyamide with glass fiber
- Purpose: for installing thermal insulation in building materials such as: class C concrete, ceramic brick, aggregate concrete, cellular concrete.
- Max. insulation thickness: 260 mm

	mm	mm	mm	mm		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
KTP08095	4,8	103	8	95	-	8	ABCD 60 ; E 40	ABCD ≥25 ; E ≥45	200	-	11200
KTP08115	4,8	123	8	115	-	8	ABCD 80 ; E 60	ABCD ≥25 ; E ≥45	200	-	11200
KTP08135	4,8	143	8	135	-	8	ABCD 100 ; E 80	ABCD ≥25 ; E ≥45	200	-	11200
KTP08155	4,8	163	8	155	-	8	ABCD 120 ; E 100	ABCD ≥25 ; E ≥45	200	-	11200
KTP08175	4,8	183	8	175	-	8	ABCD 140 ; E 120	ABCD ≥25 ; E ≥45	200	-	9600
KTP08195	4,8	203	8	195	-	8	ABCD 160 ; E 140	ABCD ≥25 ; E ≥45	200	-	9600
KTP08215	4,8	223	8	215	-	8	ABCD 180 ; E 160	ABCD ≥25 ; E ≥45	100	-	5600
KTP08235	4,8	243	8	235	-	8	ABCD 200 ; E 180	ABCD ≥25 ; E ≥45	100	-	5600
KTP08255	4,8	263	8	255	-	8	ABCD 220 ; E 200	ABCD ≥25 ; E ≥45	100	-	5600
KTP08275	4,8	283	8	275	-	8	ABCD 240 ; E 220	ABCD ≥25 ; E ≥45	100	-	4800
KTP08295	4,8	303	8	295	-	8	ABCD 260 ; E 240	ABCD ≥25 ; E ≥45	100	-	4800

Insulation fixing plug with drive-in metal pin KTM



- Material: dowel made of high-quality polypropylene copolymer, steel expanding mandrel coated with original polyamide with glass fiber, limiting the thermal bridge (mandrel head)
- Purpose: for installing thermal insulation in building materials such as: class C concrete, ceramic brick, aggregate concrete, cellular concrete
- Max. insulation thickness: 260 mm

	mm	mm	mm	mm		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
KTM10120	5,1	126	10	120	-	10	ABCD 80 ; E 60	ABCD ≥30 ; E ≥50	200	-	11200
KTM10140	5,1	146	10	140	-	10	ABCD 100 ; E 80	ABCD ≥30 ; E ≥50	200	-	11200
KTM10160	5,1	166	10	160	-	10	ABCD 120 ; E 100	ABCD ≥30 ; E ≥50	200	-	11200
KTM10180	5,1	186	10	180	-	10	ABCD 140 ; E 120	ABCD ≥30 ; E ≥50	200	-	9600
KTM10200	5,1	206	10	200	-	10	ABCD 160 ; E 140	ABCD ≥30 ; E ≥50	200	-	9600
KTM10220	5,1	226	10	220	-	10	ABCD 180 ; E 160	ABCD ≥30 ; E ≥50	100	-	5600
KTM10260	5,1	266	10	260	-	10	ABCD 220 ; E 200	ABCD ≥30 ; E ≥50	100	-	5600
KTM10300	5,1	306	10	300	-	10	ABCD 260 ; E 240	ABCD ≥30 ; E ≥50	100	-	4800
KTM10320	5,1	326	10	320	-	10	ABCD 280 ; E 260	ABCD ≥30 ; E ≥50	100	-	5600
KTM10340	5,1	346	10	340	-	10	ABCD 300 ; E 280	ABCD ≥30 ; E ≥50	100	-	5600
KTM10360	5,1	366	10	360	-	10	ABCD 320 ; E 300	ABCD ≥30 ; E ≥50	100	-	5600


Insulation fixing plug with polyamide pin KTP



- Material: dowel made of high-quality polypropylene copolymer, expanding mandrel made of original polyamide with glass fiber
- Purpose: for installing thermal insulation in building materials such as: class C concrete, ceramic brick, aggregate concrete, cellular concrete.
- Max. insulation thickness: 260 mm

	mm	mm	mm	mm		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
KTP10120	5,2	126	10	120	-	10	ABCD 80 ; E 60	ABCD ≥30 ; E ≥50	200	-	11200
KTP10140	5,2	146	10	140	-	10	ABCD 100 ; E 80	ABCD ≥30 ; E ≥50	200	-	11200
KTP10160	5,2	166	10	160	-	10	ABCD 120 ; E 100	ABCD ≥30 ; E ≥50	200	-	11200
KTP10180	5,2	186	10	180	-	10	ABCD 140 ; E 120	ABCD ≥30 ; E ≥50	200	-	9600
KTP10200	5,2	206	10	200	-	10	ABCD 160 ; E 140	ABCD ≥30 ; E ≥50	200	-	9600
KTP10220	5,2	226	10	220	-	10	ABCD 180 ; E 160	ABCD ≥30 ; E ≥50	100	-	5600
KTP10260	5,2	266	10	260	-	10	ABCD 220 ; E 200	ABCD ≥30 ; E ≥50	100	-	5600
KTP10300	5,2	306	10	300	-	10	ABCD 260 ; E 240	ABCD ≥30 ; E ≥50	100	-	4800

Insulation fixing plug with extended expansion zone and metal-plastic pin KIDM

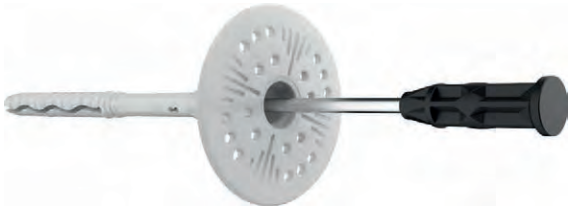

- Material: polypropylene sleeve, ribbed pin with head coated with glass-fiber reinforced polyamide, reducing thermal bridging (pin head)
- Purpose: for fixing thermal insulation in substrates: plain concrete (A), solid clay brick (B), solid calcium-silicate brick (B), hollow silicate blocks (C), vertically perforated clay brick (C), lightweight aggregate concrete (D), autoclaved aerated concrete (E)
- Maximum thickness for surface mounting and leveling/non-load-bearing layer thickness 10 mm

	mm	mm	mm	mm		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
KIDM10100	4,4	100	10	100	-	10	60 / 20	≥30 / ≥70	100	-	10000
KIDM10120	4,4	120	10	120	-	10	80 / 40	≥30 / ≥70	100	-	10000
KIDM10140	4,4	140	10	140	-	10	100 / 60	≥30 / ≥70	100	-	10000
KIDM10160	4,4	160	10	160	-	10	120 / 80	≥30 / ≥70	100	-	10000
KIDM10180	4,4	180	10	180	-	10	140 / 100	≥30 / ≥70	100	-	8400
KIDM10200	4,4	200	10	200	-	10	160 / 120	≥30 / ≥70	100	-	8400
KIDM10220	4,4	220	10	220	-	10	180 / 140	≥30 / ≥70	100	-	8400
KIDM10240	4,4	240	10	240	-	10	200 / 160	≥30 / ≥70	100	-	5600
KIDM10260	4,4	260	10	260	-	10	220 / 180	≥30 / ≥70	100	-	5600
KIDM10280	4,4	280	10	280	-	10	240 / 200	≥30 / ≥70	100	-	5600
KIDM10300	4,4	300	10	300	-	10	260 / 220	≥30 / ≥70	100	-	5600
KIDM10340	4,4	340	10	340	-	10	300 / 260	≥30 / ≥70	100	-	3600
KIDM10380	4,4	380	10	380	-	10	340 / 300	≥30 / ≥70	100	-	3600
KIDM10420	4,4	420	10	420	-	10	380 / 340	≥30 / ≥70	100	-	3600

Insulation fixing plug with extended expansion zone and metal pin KIDS



- Material: polypropylene sleeve, ribbed steel pin
- Purpose: for fixing thermal insulation in substrates: plain concrete (A), solid clay brick (B), solid calcium-silicate brick (B), hollow silicate blocks (C), vertically perforated clay brick (C), lightweight aggregate concrete (D), autoclaved aerated concrete (E)
- Maximum thickness for surface mounting and leveling/non-load-bearing layer thickness 10 mm

	mm	mm	mm	mm		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
KIDS10100	4,4	100	10	100	-	10	60 / 20	≥30 / ≥70	100	-	10000
KIDS10120	4,4	120	10	120	-	10	80 / 40	≥30 / ≥70	100	-	10000
KIDS10140	4,4	140	10	140	-	10	100 / 60	≥30 / ≥70	100	-	10000
KIDS10160	4,4	160	10	160	-	10	120 / 80	≥30 / ≥70	100	-	10000
KIDS10180	4,4	180	10	180	-	10	140 / 100	≥30 / ≥70	100	-	8400
KIDS10200	4,4	200	10	200	-	10	160 / 120	≥30 / ≥70	100	-	8400
KIDS10220	4,4	220	10	220	-	10	180 / 140	≥30 / ≥70	100	-	8400
KIDS10240	4,4	240	10	240	-	10	200 / 160	≥30 / ≥70	100	-	5600
KIDS10260	4,4	260	10	260	-	10	220 / 180	≥30 / ≥70	100	-	5600
KIDS10280	4,4	280	10	280	-	10	240 / 200	≥30 / ≥70	100	-	5600
KIDS10300	4,4	300	10	300	-	10	260 / 220	≥30 / ≥70	100	-	5600

Insulation fixing plug with extended expansion zone and plastic pin KIDPA



- Material: polypropylene sleeve, pin made of glass-fiber reinforced polyamide with an additional notch on the pin preventing cracking in concrete
- Purpose: for fixing thermal insulation in substrates: plain concrete (A), solid clay brick (B), solid calcium-silicate brick (B), hollow silicate blocks (C), vertically perforated clay brick (C), lightweight aggregate concrete (D), autoclaved aerated concrete (E)
- Maximum thickness for surface mounting and leveling/non-load-bearing layer thickness 10 mm

	mm	mm	mm	mm		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
KIDPA10100	5,3	100	10	100	-	10	60 / 20	≥30 / ≥70	100	-	10000
KIDPA10120	5,3	120	10	120	-	10	80 / 40	≥30 / ≥70	100	-	10000
KIDPA10140	5,3	140	10	140	-	10	100 / 60	≥30 / ≥70	100	-	10000
KIDPA10160	5,3	160	10	160	-	10	120 / 80	≥30 / ≥70	100	-	10000
KIDPA10180	5,3	180	10	180	-	10	140 / 100	≥30 / ≥70	100	-	8400
KIDPA10200	5,3	200	10	200	-	10	160 / 120	≥30 / ≥70	100	-	8400
KIDPA10220	5,3	220	10	220	-	10	180 / 140	≥30 / ≥70	100	-	8400
KIDPA10240	5,3	240	10	240	-	10	200 / 160	≥30 / ≥70	100	-	5600
KIDPA10260	5,3	260	10	260	-	10	220 / 180	≥30 / ≥70	100	-	5600
KIDPA10280	5,3	280	10	280	-	10	240 / 200	≥30 / ≥70	100	-	5600
KIDPA10300	5,3	300	10	300	-	10	260 / 220	≥30 / ≥70	100	-	5600

KTS plug basket KOSZ



		mm	pcs per box	pcs per masterbox	pcs per pallet
KOSZ63	Ø63	-	200	-	21000

Metal cutter (INOX) for EPS and mineral wool FDM

INOX



- The stainless steel construction and sharp cutting edges ensure high durability and repeatability of drilled holes in all insulation materials.
- The use of insulation caps reduces thermal bridging, provides a smooth insulation surface and allows the use of shorter anchors.
- The robust design offers high resistance to possible contact with dried mortar.
- The cutter is equipped with a 10 mm hex shank for use with a drill/driver.

		mm	pcs per box	pcs per masterbox	pcs per pallet
FDM	Ø67	-	1	20	-

Disc for installing KTS plug S-12530



		mm	pcs per box	pcs per masterbox	pcs per pallet
S-12530	-	-	1	10	-

Thermal insulation plug cap 62mm white ZTB



- Material: polystyrene foam
- Purpose: prevent the formation of thermal bridges in the places of mechanical fastening of polystyrene foam

		mm	pcs per box	pcs per masterbox	pcs per pallet
ZTB62	Ø62	-	100	-	15000
ZTS62	Ø62	-	100	-	15000

Fiberglass reinforcing mesh S-74165



- material: E-Glass
- made in accordance with ETAG004
- 4x4 mm mesh

		mm	pcs per box [m²]	pcs per masterbox [m²]	pcs per pallet [m²]
S-74165	1 x 50 m; 163 g/m2	-	50	-	1650

Fasteners for medium and heavy duty applications

Wedge expansion anchor LSX zinc plated. Atlantis clip



- Material: stem made of carbon steel with zinc coating ≥5µm, clip made of carbon steel with Atlantis coating ≥15µm, nut DIN 934 zinc plated ≥5µm, washer DIN 125 or DIN 9021, zinc plated ≥5µm
- Application: Fixings in substrates such as normal reinforced and unreinforced concrete, cracked and uncracked concrete

	mm	mm	mm	mm		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
LSX08075	M8	75	-	-	13	8	9	48	100	600	-
LSX08095	M8	95	-	-	13	8	29	48	100	600	-
LSX08115	M8	115	-	-	13	8	49	48	100	600	-
LSX10090	M10	90	-	-	17	10	10	60	100	600	-
LSX10115	M10	115	-	-	17	10	35	60	50	300	-
LSX10135	M10	135	-	-	17	10	55	60	50	300	-
LSX12100	M12	100	-	-	19	12	4	70	50	300	-
LSX12120	M12	120	-	-	19	12	24	70	50	300	-
LSX12150	M12	150	-	-	19	12	54	70	25	150	-
LSX16145	M16	145	-	-	24	16	28	85	25	150	-
LSX16175	M16	175	-	-	24	16	58	85	25	150	-

Wedge expansion anchor LSG Atlantis. Stainless steel A4 clip



- Material: shank made of carbon steel coated with Atlantis ≥40µm EN 13811, clip made of A4 stainless steel, nut DIN 934 class 6, coated with Atlantis ≥40µm
- Application: Fixings in substrates such as normal reinforced and unreinforced concrete, cracked and uncracked concrete

	mm	mm	mm	mm		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
LSG08075	M8	77	-	-	13	8	9	48	100	600	-
LSG08095	M8	95	-	-	13	8	29	48	100	600	-
LSG08115	M8	115	-	-	13	8	49	48	100	600	-
LSG10090	M10	90	-	-	17	10	10	60	100	600	-
LSG10105	M10	105	-	-	17	10	25	60	50	300	-
LSG10115	M10	115	-	-	17	10	35	60	50	300	-
LSG12080	M12	80	-	-	19	12	55	60	50	300	-
LSG12110	M12	110	-	-	19	12	14	70	50	300	-
LSG12130	M12	130	-	-	19	12	34	70	25	150	-
LSG16125	M16	125	-	-	24	16	8	85	25	150	-
LSG16145	M16	145	-	-	24	16	28	85	25	150	-
LSG16175	M16	175	-	-	24	16	58	85	25	150	-

Steel drop in anchor with internal thread LHO



- Material: carbon steel, electro-galvanised ≥5µm
- Application: fixings in non-cracked concrete and in concrete for non-structural backup systems.

	mm	mm	mm	mm		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
LHO06025*	M6	-	8	25	-	8	-	25	50	900	-
LHO08030	M8	-	10	30	-	10	-	30	50	900	-
LHO10040	M10	-	12	40	-	12	-	40	50	900	-
LHO12050	M12	-	15	50	-	15	-	50	50	900	-
LHO16065	M16	-	20	65	-	20	-	65	25	300	-

Steel drop in anchor with internal thread and collar LLO



- Material: carbon steel, electro-galvanised ≥5µm
- Application: fixings in non-cracked concrete and in concrete for non-structural backup systems.

		mm	mm	mm	mm		mm	mm	pcs per box	pcs per masterbox	pcs per pallet
LLO06025	M6	-	8	25	-	6	-	25	50	900	-
LLO08030	M8	-	10	30	-	8	-	30	50	900	-
LLO10040	M10	-	12	40	-	10	-	40	50	900	-
LLO12050	M12	-	15	50	-	12	-	50	50	900	-
LLO16065	M16	-	16	65	-	16	-	65	25	300	-

Manual setting tool for drop in anchors LXHM



- Installation tool for sleeve anchors with rubber grip

		mm	pcs per box	pcs per masterbox	pcs per pallet
LXHM06	M6	-	1	9	-
LXHM08	M8	-	1	9	-
LXHM10	M10	-	1	9	-
LXHM12	M12	-	1	9	-
LXHM16	M16	-	1	9	-

Chemical fasteners

Styrene-free polyester anchor SPA



- professional fastening system for high and medium loads
- can be used in damp and wet substrates
- suitable for old and cracked substrates, additionally reinforcing them
- resistant to external factors
- short setting time (up to 30 minutes)
- no substrate stressing, no bulging or cracking effect, allowing fixing close to edges.
- open cartridges can be reused by changing the mixing nozzle
- can be applied with standard silicone guns

		mm	pcs per box	pcs per masterbox	pcs per pallet
S-64300	300 ml	-	12	-	1260
S-64339	410 ml	-	12	-	1152

Styrene-free polyester anchor SPA





Substrates: non-cracked concrete / solid masonry substrates / hollow masonry substrates

mm	mm	mm	mm
M6	- / 8 / 16	- / 85 / 85	- / 80 / 80
M8	10 / 10 / 16	85 / 85 / 85	80 / 80 / 80
M10	12 / 12 / 16	95 / 90 / 90	90 / 85 / 85
M12	14 /14 / 16	115 / 90 / 90	110 / 85 / 85
M16	18 / - / -	130 / - / -	125 / - / -

- versatile two-component high-strength vinyl ester resin
- designed for the anchoring of threaded rods and rebar in concrete and masonry under very heavy loads
- high chemical resistance, and the strength of its fixings in low-integrity concrete
- can be used in dry concrete as well as in water-saturated concrete.

		mm	pcs per box	pcs per masterbox	pcs per pallet
S-64342	300 ml	-	12	-	1260
S-64343	410 ml	-	12	-	1152

Styrene-free vinyl ester anchor SVA



- for anchoring in solid wall, perforated wall, cracked and non-cracked concrete and aerated concrete in combination with various cartridge or glass bead mortars. Supplied with nut and washer. Galvanised steel grade 8.8 for internal use.
- for fixing balustrades, high racks, canopies and heavy machinery in concrete, masonry and hard natural stone. For dry or moist surfaces.

		mm	pcs per box	pcs per masterbox	pcs per pallet
S-64380	M8x110 mm	-	4	15	-
S-64382	M10x130 mm	-	4	15	-
S-64384	M12x160 mm	-	4	8	-
S-64386	M8x110 mm	-	10	10	-
S-64388	M10x130 mm	-	10	10	-
S-64390	M12x160 mm	-	10	10	-
S-64392	M16x190 mm	-	10	10	-
S-64394	M20x260 mm	-	6	6	-

Styrene-free vinyl ester anchor SVA

- ensure even dosing of the resin in the borehole and reduce resin consumption
- centering plug keeps the anchor rod axially aligned and prevents mortar from flowing out of the sleeve
- for use in substrates with voids
- no need to purge and clean the drilled hole

		mm	pcs per box	pcs per masterbox	pcs per pallet
S-64361	12x50 mm	12	4	70	-
S-64362	12x80 mm	12	4	50	-
S-64363	16x85 mm	16	4	50	-
S-64364	16x130 mm	16	4	30	-
S-64365	20x85 mm	20	4	30	-
S-64366	12x50 mm	12	10	8	-
S-64367	12x80 mm	12	10	8	-
S-64368	16x85 mm	16	10	8	-
S-64369	16x130 mm	16	10	8	-
S-64370	20x85 mm	20	10	8	-

Mixing nozzle for chemical anchors



- for two-component composite mortar ensures even mixing of the composite mortar
- new patented mixing spiral with a diffuser that significantly reduces compression force compared to conventional standard mixers

		mm	pcs per box	pcs per masterbox	pcs per pallet
S-64350	-	-	2	40	-
S-64352	-	-	10	8	-

Mixing nozzle extension

- for easier application of resins in deep or difficult to reach holes.

		mm	pcs per box	pcs per masterbox	pcs per pallet
S-64354	-	-	2	20	-

Metal perforated sleeve for chemical anchor



- Material: galvanized metal mesh
- Purpose: ensures proper positioning of the rod, reduces resin consumption, dedicated to deep anchoring

		mm	pcs per box	pcs per masterbox	pcs per pallet
S-64126	Ø12 x 1000 mm	12	1	15	-
S-64127	Ø16 x 1000 mm	16	1	15	-
S-64128	Ø22 x 1000 mm	22	1	10	-
S-64129	Ø26 x 1000 mm	26	1	8	-

Blow pump



- Purpose: for cleaning holes prior applying the chemical anchor

		mm	pcs per box	pcs per masterbox	pcs per pallet
S-64410	-	-	1	-	-

Brush for chemical anchors



- Purpose: for cleaning holes prior applying the chemical anchor

		mm	pcs per box	pcs per masterbox	pcs per pallet
S-64131	-	10	1	50	-
S-64132	-	13	1	50	-
S-64134	-	18	1	50	-
S-64136	-	28	1	25	-

Screws

Hardened timber screw with countersunk head WHT



- Material: electro-galvanized steel screw
- Purpose: for joining wooden, wood-based and PVC elements to wooden substrates
- CE - screws made in accordance with EN: 14592, with CE marking

	mm	mm	mm	mm max		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
WHT30016	3	16	full	-	T10	-	-	16	1500	18000	-
WHT30020	3	20	full	-	T10	-	2	18	1000	12000	-
WHT30025	3	25	full	-	T10	-	7	18	1000	12000	-
WHT30030	3	30	16	-	T10	-	12	18	1000	18000	-
WHT30035	3	35	16	-	T10	-	17	18	1000	18000	-
WHT30040	3	40	21	-	T10	-	22	18	500	9000	-
WHT35016*	3,5	16	full	-	T15	-	-	-	1500	18000	-
WHT35020	3,5	20	full	-	T15	-	-	20	1000	12000	-
WHT35025	3,5	25	full	-	T15	-	4	21	1000	18000	-
WHT35030	3,5	30	16	-	T15	-	9	21	500	9000	-
WHT35035	3,5	35	16	-	T15	-	14	21	500	9000	-
WHT35040	3,5	40	21	-	T15	-	19	21	500	9000	-
WHT35050	3,5	50	30	-	T15	-	29	21	400	7200	-
WHT35060	3,5	60	35	-	T15	-	39	21	400	7200	-
WHT40016*	4	16	full	-	T20	-	-	-	1000	12000	-
WHT40020	4	20	full	-	T20	-	-	20	1000	18000	-
WHT40025	4	25	full	-	T20	-	1	24	500	6000	-
WHT40030	4	30	16	-	T20	-	6	24	500	9000	-
WHT40035	4	35	16	-	T20	-	11	24	500	9000	-
WHT40040	4	40	21	-	T20	-	16	24	500	9000	-
WHT40045	4	45	30	-	T20	-	21	24	300	5400	-
WHT40050	4	50	30	-	T20	-	26	24	300	3600	-
WHT40060	4	60	35	-	T20	-	36	24	250	3000	-
WHT40070	4	70	40	-	T20	-	46	24	250	3000	-
WHT45040	4,5	40	21	-	T25	-	13	27	300	5400	-
WHT45050	4,5	50	30	-	T25	-	23	27	250	4500	-
WHT45060	4,5	60	35	-	T25	-	33	27	250	3000	-
WHT45070	4,5	70	40	-	T25	-	43	27	250	3000	-
WHT45080	4,5	80	50	-	T25	-	53	27	200	2400	-
WHT50040	5	40	21	-	T25	-	10	30	500	6000	-
WHT50050	5	50	30	-	T25	-	20	30	300	3600	-
WHT50060	5	60	35	-	T25	-	30	30	200	2400	-
WHT50070	5	70	40	-	T25	-	40	30	200	2400	-
WHT50080	5	80	50	-	T25	-	50	30	200	2400	-
WHT50090	5	90	50	-	T25	-	60	30	200	2400	-
WHT50100	5	100	60	-	T25	-	70	30	200	2400	-
WHT50120	5	120	60	-	T25	-	90	30	200	2400	-
WHT60050	6	50	30	-	T30	-	14	36	200	2400	-
WHT60060	6	60	35	-	T30	-	24	36	200	2400	-
WHT60070	6	70	40	-	T30	-	34	36	200	2400	-
WHT60080	6	80	50	-	T30	-	44	36	100	1200	-
WHT60090	6	90	50	-	T30	-	54	36	100	1200	-
WHT60100	6	100	60	-	T30	-	64	36	100	1200	-
WHT60120	6	120	70	-	T30	-	84	36	100	1200	-
WHT60140	6	140	70	-	T30	-	104	36	100	1200	-
WHT60160	6	160	70	-	T30	-	124	36	100	900	-
WHT60180	6	180	70	-	T30	-	144	36	100	900	-
WHT60200	6	200	70	-	T30	-	164	36	100	900	-
WHT60220	6	220	70	-	T30	-	184	36	100	600	-
WHT60240	6	240	70	-	T30	-	204	36	100	600	-
WHT60260	6	260	70	-	T30	-	224	36	100	600	-

* not subject to EN 14592

Hardened timber screw with countersunk head KHT



- Material: steel screw, galvanised
- Purpose: fasteners for wooden structures
- CE – screws manufactured in accordance with EN:14592, with the CE mark

	mm	mm	mm	mm max		mm	mm	mm	kg per box	kg per masterbox	kg per pallet
KHT40030	4	30	16	-	T20	-	6	24	5	20	-
KHT40035	4	35	16	-	T20	-	11	24	5	20	-
KHT40040	4	40	21	-	T20	-	16	24	5	20	-
KHT40045	4	45	30	-	T20	-	21	24	5	20	-
KHT40050	4	50	30	-	T20	-	26	24	5	20	-
KHT40060	4	60	35	-	T20	-	36	24	5	20	-
KHT40070	4	70	40	-	T20	-	46	24	5	20	-
KHT45040	4,5	40	21	-	T25	-	13	27	5	20	-
KHT45050	4,5	50	30	-	T25	-	23	27	5	20	-
KHT45060	4,5	60	35	-	T25	-	33	27	5	20	-
KHT45070	4,5	70	40	-	T25	-	43	27	5	20	-
KHT45080	4,5	80	50	-	T25	-	53	27	5	20	-
KHT50040	5	40	20	-	T25	-	10	30	5	20	-
KHT50050	5	50	30	-	T25	-	20	30	5	20	-
KHT50060	5	60	35	-	T25	-	30	30	5	20	-
KHT50070	5	70	40	-	T25	-	40	30	5	20	-
KHT50080	5	80	50	-	T25	-	50	30	5	20	-
KHT60050	6	50	30	-	T30	-	14	36	5	20	-
KHT60060	6	60	35	-	T30	-	24	36	5	20	-
KHT60070	6	70	40	-	T30	-	34	36	5	20	-
KHT60080	6	80	50	-	T30	-	44	36	5	20	-
KHT60090	6	90	50	-	T30	-	54	36	5	20	-
KHT60100	6	100	60	-	T30	-	64	36	5	20	-

A2 stainless steel wood screw WTN



- Material: A2 stainless steel
- Purpose: dedicated to terrace boards, high corrosion resistance

	mm	mm	mm	mm max		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
WTN4242	4,2	42	25,5	-	T20	-	-	-	250	4500	-
WTN4255	4,2	55	32	-	T20	-	-	-	250	4500	-
WTN4875	4,8	75	45	-	T20	-	-	-	250	3000	-

C1 stainless steel wood screw WHTN



- Material: stainless steel
- Purpose: dedicated to terrace boards, high corrosion resistance

	mm	mm	mm	mm max		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
WHTN5045	5	45	30	-	T25	-	-	-	200	3600	-
WHTN5050	5	50	31	-	T25	-	-	-	200	3600	-
WHTN5060	5	60	36	-	T25	-	-	-	200	3600	-

A2 stainless steel wood screw WTNA



- Material: A2 stainless steel
- Purpose: dedicated to terrace boards, high corrosion resistance

	mm	mm	mm	mm max		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
WTNA25350	5,3	50	17	-	T25	-	-	-	250	3000	-
WTNA25360	5,3	60	23	-	T25	-	-	-	250	3000	-

Handles and ties

Butterfly hose clamp (with label) OPSM




- electro-galvanized screw
- 9 mm wide stainless steel band
- for installation of pipes and hoses
- plastic wing handle
- easy installation – using the handle

	mm		mm	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
OPSM0812S	9	-	-	Ø8 ÷ 12	-	50	1000	-
OPSM1016S	9	-	-	Ø10 ÷ 16	-	50	1000	-
OPSM1222S	9	-	-	Ø12 ÷ 22	-	50	1000	-
OPSM1627S	9	-	-	Ø16 ÷ 27	-	50	1000	-
OPSM2032S	9	-	-	Ø20 ÷ 32	-	50	1000	-

Nylon cable tie OPPB

NYLON CE

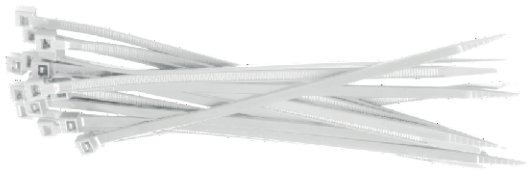

- Specially designed head of tie for higher tear resistance
- Internal teeth allow the tie to be secured in an optimal way without destroying the object being secured

	mm		mm	mm	mm	pcs per bag	bags per box	bags per masterbox
OPPB25080	2.5x80	-	-	3 ÷ 14	-	100	600	-
OPPB25100	2.5x100	-	-	3 ÷ 20,5	-	100	500	-
OPPB25120	2.5x120	-	-	3 ÷ 27	-	100	250	-
OPPB25150	2.5x150	-	-	3 ÷ 36,5	-	100	250	-
OPPB25200	2.5x200	-	-	3 ÷ 52,5	-	100	250	-
OPPB36140	3.6x140	-	-	3,5 ÷ 33	-	100	250	-
OPPB36180	3.6x180	-	-	3,5 ÷ 46	-	100	200	-
OPPB36200	3.6x200	-	-	3,5 ÷ 46	-	100	200	-
OPPB36250	3.6x250	-	-	3,5 ÷ 68	-	100	100	-
OPPB36300	3.6x300	-	-	3,5 ÷ 84	-	100	100	-
OPPB36370	3.6x370	-	-	3,5 ÷ 106	-	100	100	-
OPPB46120	4.6x120	-	-	3,5 ÷ 23,8	-	100	200	-
OPPB46180	4.6x180	-	-	3,5 ÷ 43	-	100	100	-
OPPB48200	4.8x200	-	-	3,5 ÷ 49,5	-	100	100	-
OPPB48250	4.8x250	-	-	3,5 ÷ 65	-	100	100	-
OPPB48280	4.8x280	-	-	3,5 ÷ 74,8	-	100	100	-
OPPB48300	4.8x300	-	-	3,5 ÷ 81	-	100	100	-
OPPB48380	4.8x380	-	-	3,5 ÷ 106,7	-	100	50	-
OPPB48430	4.8x430	-	-	3,5 ÷ 122,5	-	100	50	-
OPPB48450	4.8x450	-	-	3,5 ÷ 129	-	100	50	-
OPPB76200	7.6x200	-	-	8,5 ÷ 50,9	-	100	50	-
OPPB76300	7.6x300	-	-	8,5 ÷ 82,8	-	100	50	-
OPPB76370	7.6x370	-	-	8,5 ÷ 103,5	-	100	25	-
OPPB76400	7.6x400	-	-	8,5 ÷ 114,5	-	100	25	-
OPPB76450	7.6x450	-	-	8,5 ÷ 130,5	-	100	25	-
OPPB76550	7.6x550	-	-	8,5 ÷ 162,5	-	100	10	-
OPPB88450	8.8x450	-	-	8,5 ÷ 130,5	-	100	25	-
OPPB88550	8.8x550	-	-	8,5 ÷ 163,5	-	100	10	-
OPPB88780	8.8x780	-	-	8,5 ÷ 235,5	-	100	10	-

Nylon cable tie OPPC

NYLON UV UV RESISTANT CE



- UV resistance
- Specially designed head of tie for higher tear resistance
- Internal teeth allow the tie to be secured in an optimal way without destroying the object being secured

	mm		mm	mm	mm	pcs per bag	bags per box	bags per masterbox
OPPC25080	2.5x80	-	-	3 ÷ 14	-	100	600	-
OPPC25100	2.5x100	-	-	3 ÷ 20,5	-	100	500	-
OPPC25120	2.5x120	-	-	3 ÷ 27	-	100	250	-
OPPC25150	2.5x150	-	-	3 ÷ 36,5	-	100	250	-
OPPC25200	2.5x200	-	-	3 ÷ 52,5	-	100	250	-
OPPC36140	3.6x140	-	-	3,5 ÷ 33	-	100	250	-
OPPC36180	3.6x180	-	-	3,5 ÷ 46	-	100	200	-
OPPC36200	3.6x200	-	-	3,5 ÷ 46	-	100	200	-
OPPC36250	3.6x250	-	-	3,5 ÷ 68	-	100	100	-
OPPC36300	3.6x300	-	-	3,5 ÷ 84	-	100	100	-
OPPC36370	3.6x370	-	-	3,5 ÷ 106	-	100	100	-
OPPC46120	4.6x120	-	-	3,5 ÷ 23,8	-	100	200	-
OPPC46180	4.6x180	-	-	3,5 ÷ 43	-	100	100	-
OPPC48200	4.8x200	-	-	3,5 ÷ 49,5	-	100	100	-
OPPC48250	4.8x250	-	-	3,5 ÷ 65	-	100	100	-
OPPC48280	4.8x280	-	-	3,5 ÷ 74,8	-	100	100	-
OPPC48300	4.8x300	-	-	3,5 ÷ 81	-	100	100	-
OPPC48380	4.8x380	-	-	3,5 ÷ 106,7	-	100	50	-
OPPC48430	4.8x430	-	-	3,5 ÷ 122,5	-	100	50	-
OPPC48450	4.8x450	-	-	3,5 ÷ 129	-	100	50	-
OPPC76200	7.6x200	-	-	8,5 ÷ 50,9	-	100	50	-
OPPC76300	7.6x300	-	-	8,5 ÷ 82,8	-	100	50	-
OPPC76370	7.6x370	-	-	8,5 ÷ 103,5	-	100	25	-
OPPC76400	7.6x400	-	-	8,5 ÷ 114,5	-	100	25	-
OPPC76450	7.6x450	-	-	8,5 ÷ 130,5	-	100	25	-
OPPC76550	7.6x550	-	-	8,5 ÷ 162,5	-	100	10	-
OPPC88450	8.8x450	-	-	8,5 ÷ 130,5	-	100	25	-
OPPC88550	8.8x550	-	-	8,5 ÷ 163,5	-	100	10	-
OPPC88780	8.8x780	-	-	8,5 ÷ 235,5	-	100	10	-

Nylon cable tie OPPR

NYLON UV UV RESISTANT CE



- Specially designed head of tie for higher tear resistance
- Internal teeth allow the tie to be secured in an optimal way without destroying the object being secured

	mm		mm	mm	mm	pcs per bag	bags per box	bags per masterbox
OPPR36140	3.6x140	-	-	3,5 ÷ 33	-	100	250	-
OPPR36200	3.6x200	-	-	3,5 ÷ 46	-	100	200	-
OPPR48200	4.8x200	-	-	3,5 ÷ 49,5	-	100	100	-
OPPR48250	4.8x250	-	-	3,5 ÷ 65	-	100	100	-

Nylon cable tie OPPZ

NYLON UV UV RESISTANT CE



- Specially designed head of tie for higher tear resistance
- Internal teeth allow the tie to be secured in an optimal way without destroying the object being secured

	mm		mm	mm	mm	pcs per bag	bags per box	bags per masterbox
OPPZ25100	2.5x100	-	-	3 ÷ 20,5	-	100	500	-
OPPZ25150	2.5x150	-	-	3 ÷ 36,5	-	100	250	-
OPPZ36140	3.6x140	-	-	3,5 ÷ 33	-	100	250	-
OPPZ36200	3.6x200	-	-	3,5 ÷ 46	-	100	200	-
OPPZ48200	4.8x200	-	-	3,5 ÷ 49,5	-	100	100	-
OPPZ48250	4.8x250	-	-	3,5 ÷ 65	-	100	100	-

Carpentry joints

Composite post support ground spike SADDAR PSK



- PET composite reinforced with glass fiber
- mainly used for construction of gazebos, terrace pergolas, shelters, sheds, fences, palisades and other light post structures
- the anchors are fully weather-resistant
- ensures proper separation of wood from the ground protecting it from moisture
- quick and easy installation directly in soil or concrete

	mm	mm	pcs per box	pcs per masterbox	pcs per pallet
KOWP046550	46 x 100 x 450 ;550	-	1	-	380
KOWP071750	71 x 150 x 600 ;750	-	1	-	200
KOWP091750	91 x 150 x 600 ;750	-	1	-	128
KOWP101750	101 x 150 x 600 ;750	-	1	-	120

Retail packaging – bags

Universal expansion plug BRX

NYLON





- Material: polyamide sleeve
- Purpose: for mounting elements in substrates such as: concrete, stone, brick, aerated concrete, block, etc.

	mm	mm	mm	mm		mm	mm	mm	pcs per bag	bags per box	bags per masterbox
BRX06030	4,0-5,0	-	6	30	-	6	-	30	20	12	72
BRX08040	4,5-6,0	-	8	40	-	8	-	40	14	12	72
BRX10050	6,0-8,0	-	10	50	-	10	-	50	8	12	72
BRX12060	8,0-10,0	-	12	60	-	12	-	60	4	12	72

Universal expansion plug with countersunk head screw BRXS

NYLON





- Material: polyamide sleeve, electro-galvanized steel screw
- Purpose: for mounting elements in substrates such as: concrete, stone, brick, aerated concrete, block, etc.

	mm	mm	mm	mm		mm	mm	mm	pcs per bag	bags per box	bags per masterbox
BRXS0640040	4	40	6	30	PZ 2	6	10	30	14	12	72
BRXS0640050	4	50	6	30	PZ 2	6	20	30	12	12	72
BRXS0640060	4	60	6	30	PZ 2	6	30	30	10	12	72
BRXS0845050	4,5	50	8	40	PZ 2	8	10	40	9	12	72
BRXS0845060	4,5	60	8	40	PZ 2	8	20	40	8	12	72
BRXS0845080	4,5	80	8	40	PZ 2	8	40	40	7	12	72
BRXS1060060	6	60	10	50	PZ 3	10	10	50	5	12	72
BRXS1060080	6	80	10	50	PZ 3	10	30	50	4	12	72

Universal expansion plug with hex head screw BRXK





- Material: polyamide sleeve, electro-galvanized steel screw
- Purpose: for mounting elements in substrates such as: concrete, stone, brick, aerated concrete, block, etc.

	mm	mm	mm	mm		mm	mm	mm	pcs per bag	bags per box	bags per masterbox
BRXK1060060	6	60	10	50	17	10	10	50	6	12	72
BRXK1060080	6	80	10	50	17	10	30	50	5	12	72
BRXK1060100	6	100	10	50	17	10	50	50	4	12	72
BRXK1280070	8	70	12	60	19	12	10	60	4	12	72
BRXK1280100	8	100	12	60	19	12	40	60	3	12	72
BRXK1280120	8	120	12	60	19	12	60	60	2	12	72

Universal expansion plug with angle hook BRXHP





- Material: polyamide sleeve, electro-galvanized steel screw with straight hook
- Purpose: for mounting elements in substrates such as: concrete, stone, brick, aerated concrete, block, etc.

	mm	mm	mm	mm		mm	mm	mm	pcs per bag	bags per box	bags per masterbox
BRXHP064036	4	36	6	30	-	6	-	30	8	12	72
BRXHP084546	4,5	46	8	40	-	8	-	40	6	12	72

Universal expansion plug with round hook BRXHS





- Material: polyamide sleeve, electro-galvanized steel screw with ceiling hook
- Purpose: for mounting elements in substrates such as: concrete, stone, brick, aerated concrete, block, etc.

	mm	mm	mm	mm		mm	mm	mm	pcs per bag	bags per box	bags per masterbox
BRXHS064036	4	36	6	30	-	6	-	30	6	12	72
BRXHS084546	4,5	46	8	40	-	8	-	40	5	12	72

Quick-fix expansion plug KSM





- Material: polypropylene copolymer dowel, electro-galvanized steel nail
- Purpose: for solid building materials such as: plain concrete C20/25, solid ceramic brick class 15, solid silicate brick class 15

	mm	mm	mm	mm		mm	mm	mm	pcs per bag	bags per box	bags per masterbox
BKSM06040	3,8	44	6	40	PZ 2	6	10	30	20	12	72
BKSM06060	3,8	64	6	60	PZ 2	6	30	30	15	12	72
BKSM06080	3,8	84	6	80	PZ 2	6	50	30	11	12	72
BKSM08045	4,8	50	8	45	PZ 2	8	5	40	12	12	72
BKSM08060	4,8	65	8	60	PZ 2	8	20	40	9	12	72
BKSM08080	4,8	85	8	80	PZ 2	8	40	40	7	12	72

Quick-fix expansion plug with flange BKSMK





- Material: polypropylene copolymer dowel, electro-galvanized steel nail
- Purpose: for solid building materials such as: plain concrete C20/25, solid ceramic brick class 15, solid silicate brick class 15

	mm	mm	mm	mm		mm	mm	mm	pcs per bag	bags per box	bags per masterbox
BKSMK06040	3,8	44	6	40	PZ 2	6	10	30	20	12	72
BKSMK06060	3,8	64	6	60	PZ 2	6	30	30	15	12	72
BKSMK06080	3,8	84	6	80	PZ 2	6	50	30	11	12	72
BKSMK08060	4,8	65	8	60	PZ 2	8	20	40	9	12	72

Frame fixing with zinc plated hex head screw BTXK





- Material: dowel made of high-grade polypropylene (nylon), galvanized steel screw with a countersunk head and POZIDRIV socket
- Purpose: for construction materials such as plain concrete, cellular concrete, solid ceramic brick, solid silicate brick, hollow silicate brick, perforated brick, ceramic block, silicate block

	mm	mm	mm	mm		mm	mm	mm	pcs per bag	bags per box	bags per masterbox
BTXK08060	5,5	65	8	60	10 / T25	8	10	50	6	30	30
BTXK08080	5,5	85	8	80	10 / T25	8	30	50	6	30	30
BTXK08100	5,5	105	8	100	10 / T25	8	50	50	6	30	30
BTXK08120	5,5	125	8	120	10 / T25	8	70	50	6	30	30
BTXK08140	5,5	145	8	140	10 / T25	8	90	50	6	30	30
BTXK10080	6,9	85	10	80	13 / T40	10	10	65	6	30	30
BTXK10100	6,9	105	10	100	13 / T40	10	30	65	6	30	30
BTXK10120	6,9	125	10	120	13 / T40	10	50	65	6	30	30
BTXK10140	6,9	145	10	140	13 / T40	10	70	65	4	30	30

Frame fixing with zinc plated countersunk head screw BTXS





- Material: dowel made of high-grade polypropylene (nylon), galvanized steel screw with a countersunk head and POZIDRIV socket
- Purpose: for construction materials such as plain concrete, cellular concrete, solid ceramic brick, solid silicate brick, hollow silicate brick, perforated brick, ceramic block, silicate block

	mm	mm	mm	mm		mm	mm	mm	pcs per bag	bags per box	bags per masterbox
BTXS08060	5,5	65	8	60	T25	8	10	50	6	30	30
BTXS08080	5,5	85	8	80	T25	8	30	50	6	30	30
BTXS08100	5,5	105	8	100	T25	8	50	50	6	30	30
BTXS08120	5,5	125	8	120	T25	8	70	50	6	30	30
BTXS08140	5,5	145	8	140	T25	8	90	50	6	30	30
BTXS10080	6,9	85	10	80	T40	10	10	65	6	30	30
BTXS10100	6,9	105	10	100	T40	10	30	65	6	30	30
BTXS10120	6,9	125	10	120	T40	10	50	65	6	30	30
BTXS10140	6,9	145	10	140	T40	10	70	65	4	30	30

Self-drilling screw TEX with flat wafer head phosphated BTEXSF





	mm	mm	mm	mm max		mm	mm	mm	pcs per bag	bags per box	bags per masterbox
BTEXSF1003913	3,9	13	full	2 x 0,6	PH 2	-	-	-	100	12	72
BTEXSF2003913	3,9	13	full	2 x 0,6	PH 2	-	-	-	200	12	72
BTEXSF5003913	3,9	13	full	2 x 0,6	PH 2	-	-	-	500	12	72

Driva nylon plug for plasterboard BDRIVANYLON

NYLON





- Material: polyamide
- Purpose: for mounting elements in plasterboard

	mm	mm	mm	mm		mm	mm	mm	pcs per bag	bags per box	bags per masterbox
BDRIVANYLON	3,5-4,2	0	13	22	PH2/PH3	7	-	-	14	12	72

Driva ZnAl plug for plasterboard BDRIVAZNAL





- Material: zinc alloy with aluminum
- Purpose: for mounting elements in plasterboard

	mm	mm	mm	mm		mm	mm	mm	pcs per bag	bags per box	bags per masterbox
BDRIVAZNAL	4,2	32	13	30	PH2/PH3	8	-	-	10	12	72

Metal hammer-in anchor for plasterboard with screw BKWM





- quick fastening of even large quantities of anchors in a short time
- easy hammer-in installation without the need for drilling or creating dust
- anchors made entirely of metal — recommended especially for buildings requiring enhanced fire safety
- the design allows easy driving in and prevents rotation in the substrate during installation
- the anchor can be easily removed, leaving only a small hole in the wall

	mm	mm	mm	mm		mm	mm	mm	pcs per bag	bags per box	bags per masterbox
BKWM304040	4	40	12	30	PZ 2	-	5	20	20	12	72

Hardened timber screw with countersunk head BWHT





- Material: electro-galvanized steel screw
- Purpose: for wood, chipboard, plywood, plasterboard
- CE - screws made in accordance with EN:14592, with CE marking
- SMALL PACKAGING

	mm	mm	mm	mm max		mm	mm	mm	pcs per bag	bags per box	bags per masterbox
BWHT30016	3	16	full	-	T10	-	-	16	60	45	-
BWHT30020	3	20	full	-	T10	-	2	18	60	45	-
BWHT30025	3	25	full	-	T10	-	7	18	50	45	-
BWHT30030	3	30	16	-	T10	-	12	18	45	45	-
BWHT30035	3	35	16	-	T10	-	17	18	40	45	-
BWHT30040	3	40	21	-	T10	-	22	18	35	45	-
BWHT35016	3,5	16	full	-	T15	-	-	-	50	45	-
BWHT35020	3,5	20	full	-	T15	-	-	20	45	45	-
BWHT35025	3,5	25	full	-	T15	-	4	21	45	45	-
BWHT35030	3,5	30	16	-	T15	-	9	21	35	45	-
BWHT35035	3,5	35	16	-	T15	-	14	21	32	45	-
BWHT35040	3,5	40	21	-	T15	-	19	21	30	45	-
BWHT35050	3,5	50	30	-	T15	-	29	21	22	45	-
BWHT40016*	4	16	full	-	T20	-	-	-	45	45	-
BWHT40020	4	20	full	-	T20	-	-	20	40	45	-
BWHT40025	4	25	full	-	T20	-	1	24	35	45	-
BWHT40030	4	30	16	-	T20	-	6	24	35	45	-
BWHT40035	4	35	16	-	T20	-	11	24	28	45	-
BWHT40040	4	40	21	-	T20	-	16	24	24	45	-
BWHT40045	4	45	30	-	T20	-	21	24	22	45	-
BWHT40050	4	50	30	-	T20	-	26	24	20	45	-
BWHT40060	4	60	35	-	T20	-	36	24	15	45	-
BWHT40070	4	70	40	-	T20	-	46	24	14	45	-
BWHT45040	4,5	40	21	-	T25	-	13	27	20	45	-
BWHT45050	4,5	50	30	-	T25	-	23	27	16	45	-
BWHT45060	4,5	60	35	-	T25	-	33	27	12	45	-
BWHT45070	4,5	70	40	-	T25	-	43	27	10	45	-
BWHT45080	4,5	80	50	-	T25	-	53	27	8	45	-
BWHT50040	5	40	21	-	T25	-	10	30	15	45	-
BWHT50050	5	50	30	-	T25	-	20	30	12	45	-
BWHT50060	5	60	35	-	T25	-	30	30	11	45	-
BWHT50070	5	70	40	-	T25	-	40	30	9	45	-
BWHT50080	5	80	50	-	T25	-	50	30	7	45	-
BWHT50090	5	90	50	-	T25	-	60	30	6	45	-
BWHT50100	5	100	60	-	T25	-	70	30	5	45	-
BWHT50120	5	120	60	-	T25	-	90	30	5	45	-
BWHT60050	6	50	30	-	T30	-	14	36	9	45	-
BWHT60060	6	60	35	-	T30	-	24	36	8	45	-
BWHT60070	6	70	40	-	T30	-	34	36	6	45	-
BWHT60080	6	80	50	-	T30	-	44	36	5	45	-

* not subject to EN 14592

STALCO
PERFECT



TECHNICAL AND
CONSTRUCTION
CHEMICALS

Chemical Anchor

Styrene-free polyester anchor SPA 300



- professional fastening system for high and medium loads
- can be used in damp and wet substrates
- suitable for old and cracked substrates, additionally reinforcing them
- resistant to external factors
- short setting time (up to 30 minutes)
- no substrate stressing, no bulging or cracking effect, allowing fixing close to edges.
- open cartridges can be reused by changing the mixing nozzle
- can be applied with standard silicone guns

			min.	pcs per masterbox	pcs per pallet
S-64300	300 ml	-	12	-	1260
S-64339	410 ml	-	12	-	1152

Styrene-free vinyl ester anchor SVA 300



- versatile two-component high-strength vinyl ester resin
- designed for the anchoring of threaded rods and rebar in concrete and masonry under very heavy loads
- high chemical resistance, and the strength of its fixings in low-integrity concrete
- can be used in dry concrete as well as in water-saturated concrete.

			min.	pcs per masterbox	pcs per pallet
S-64342	300 ml	-	12	-	1260
S-64343	410 ml	-	12	-	1152

Technical chemistry

Rust cleaner MoS2



Technical data:
- flash Point: 27 °C
- odor: solvent
- density: 0.8 g/cm³
- dispensing System: spray
- color: light gray

Application:
- general screw connections:
- industrial: for loosening rusted and seized screw connections.
- automotive: useful for dismantling exhaust systems, suspension components, and all connections exposed to atmospheric factors, and for loosening rusted and seized screw connections.
- for loosening rusted and seized screw connections.
- agricultural sector: for loosening rusted and seized screw connections, especially during winter when machines are particularly exposed to corrosion.
- also suitable for gardening, household, and hobbyist use.

			min.	pcs per masterbox	pcs per pallet
S-64573	400 ml	grey	1	6	1000

Multifunctional spray 5 in 1



Technical data:
- flash Point: 30 °C
- odor: solvent
- density: 0.79 g/cm³
- dispensing System: spray
- color: brown

Application:
- for all types of connections requiring lubricating coatings, minimizing squeaks and creaks:
- industrial: removes stubborn oil, resin, and grease stains.
- automotive: preserves rubber parts and prevents freezing, maintains brake cables, tie rods, restores proper operation of brake and ignition systems.
- furniture industry: eliminates annoying squeaks.
- electrical industry: protects electrical systems and restores their proper functioning.
- locksmith industry: for the maintenance of locks and lock inserts.

			min.	pcs per masterbox	pcs per pallet
S-64577	400 ml	honey	1	6	1000

Copper grease



Technical data:
- physical state at 20 °C: aerosol
- color: copper
- odor: characteristic
- boiling point at atmospheric pressure: −42 °C (propellant)
- vapor pressure at 50 °C: 300 kPa
- auto-ignition temperature: 410 °C (propellant)

Application:
- based on pure copper, prevents seizing
- excellent for use at high temperatures and in areas exposed to corrosion
- suitable for disassembly of parts exposed to high temperatures, components that have seized after a long operating period, as well as parts exposed to extreme conditions
- for lubrication during assembly of threaded and plug-in connections, flanges, pipes, valves, furnace hinges
- for boilers, engines, turbines, fittings
- for brake systems, exhaust systems, battery terminals in motor vehicles
- for chemical and petrochemical plants, factories, refineries, ceramic, glass and steel plants
- for assembly work on machinery, for threaded connections exposed to high temperatures and corrosion
- prevents the formation of scale
- resistant to high pressures

			min.	pcs per masterbox	pcs per pallet
S082264582	400 ml	copper			

Universal cleaner



Technical data:
- flash Point: -12 °C
- odor: solvent-like
- density: 0.7 g/cm³
- dispensing System: spray
- color: colorless

Application:
- for removing all types of contaminants and stubborn dirt caused by oil, grease, wax, and rubber:
- industrial: maintenance and ongoing repairs of equipment, tool cleaning.
- automotive: cleaning and degreasing of disc brakes, drum brakes, carburetors, clutch components, gearboxes, fuel pumps, and other engine parts.
- gardening industry: cleaning, repairing, and maintaining tools.
- chemical industry: various cleaning
- metallurgical industry: cleaning
- printing industry: cleaning
- shipbuilding industry: cleaning
- mining industry: cleaning
- wood industry: cleaning

			min.	pcs per masterbox	pcs per pallet
S-64571	500 ml	colorless	1	6	1000

Copper spray



Technical data:
- flash Point: >250 °C
- odor: lemony
- density: 0.75 g/cm³
- dispensing System: spray
- color: colorless

Application:
- for all types of connections requiring slip coatings, reducing squeaks and creaks:
- industrial: rollers in production tapes, slides (facilitates transport), maintenance of nozzles in plastic injection molding machines.
- automotive: reduces squeaks and creaks in plastics and rubber, creates active slip coatings in guides, sunroofs, seat rails; forms a water barrier to protect rubber seals from sticking and freezing, e.g., in vehicle doors; tarpaulin maintenance.
- window industry: window guides, installation and maintenance of seals.
- refrigeration industry: seals in freezers, refrigerators.
- electrical industry: seals in electrical distribution boards.
- hydraulic and heating industry: maintenance and protection of cold and hot water valves in heating and sanitary areas.
- foundry industry: adhesive agent for molds, e.g., plastic molds.
- tourism industry: impregnation of tents.

			min.	pcs per masterbox	pcs per pallet
S-64584	400 ml	colorless	1	6	1000

Detailing Chemicals

Touchless active foam for passenger cars



Technical specifications:
- efficiency: from 1000 to 1500 m²
- concentration: 1:100
- pH: 14
- formula: single-phase
- color: brown

Application:
- for touchless washing of passenger cars, SUVs, vans, and buses in manual car washes
- for removing layered road dirt, organic residues, and operational dirt without the use of brushes or sponges

			min.	pcs per masterbox	pcs per pallet
S084164548	1000 ml	cream	1	6	432

Touchless active foam for trucks



Technical data:
- efficiency: 500 to 1000 m²
- relative density: 1.097 g/cm³ ± 0.02
- concentration: 1:100
- pH: 14
- formula: two-phase
- color: green

Application:
- for washing heavy-duty vehicles
- for cleaning industrial and agricultural machinery and equipment
- for cleaning heavily soiled hard surfaces resistant to alkalis

			min.	pcs per masterbox	pcs per pallet
S084164552	1000 ml	green	1	6	432

Touchless active foam for trucks



Technical data:
- coverage per 1L: up to 3000 m²
- relative Density: 1.080 - 1.120 g/cm³
- concentration: 1:10, 1:100
- pH: 7
- formula: single-phase
- fragrance: cherry
- color: brown

Application:
- for washing cars protected with waxes, quartz coatings, and ceramic coatings.
- removes road grime without worrying about damaging expensive and delicate car body finishing elements.

			min.	pcs per masterbox	pcs per pallet
S084164556	1000 ml	brown	1	6	432

Agent for cleaning rims from deposits, dirt, tarry substances



Technical data:
- efficiency: up to 100 m²
- relative density: 1.04 g/cm³ ± 0.02
- pH: 7
- formula: Ready-to-use preparation, no need for dilution

Application:
- for removing brake dust and road dirt from aluminum, chrome-plated, and painted car wheels.

			min.	pcs per masterbox	pcs per pallet
S084564564	600 ml	colorless	1	6	432

Household chemicals

Moss and lichen cleaner for cleaning roofs and facades



Technical data:
- coverage: from 100 to 150 m²
- relative density: 0.990 g/cm³ ± 0.02
- concentrate: 1:10
- pH: 7 (neutral)
- formula: single-phase
- color: colorless

Application:
- for cleaning, preservation, and protection of ceramic and concrete roof tiles as well as sheet metal tiles against harmful green deposits.
- for washing and cleaning algae, moss, lichen, and mold from roofs and facades.
- protects the cleaned surface for a longer period, creating an environment that prevents the formation of various microorganisms.

			min.	pcs per masterbox	pcs per pallet
S083164540	1000 ml	colorless	1	6	432

Concentrate for cleaning cobblestones



Technical data:
- efficiency: up to 100 m²
- relative density: 1.097 g/cm³ ± 0.02
- concentrate: 1:20
- pH: 14
- formula: two-phase
- color: blue

Application:
- for cleaning cobblestones, granite cobblestones, concrete terrace slabs, composite boards.
- for cleaning pavement tiles from oil-based contaminants such as grease, oils, tar substances, fuels, etc.
- for cleaning surfaces around workshops, production halls, gas stations, transport bases, parking lots, garages.

			min.	pcs per masterbox	pcs per pallet
S083164544	1000 ml	blue	1	6	432

All-purpose cleaner for roofs, facades and paving stones



Technical data:
- efficiency: up to 100 m²
- relative density: 1.070 g/cm³ ± 0.02
- concentration: 1:10
- pH: 14
- formula: single-phase
- color: brown

Application:
- for cleaning facades, ceramic, concrete, bituminous, metal roof tiles, roofing felt, facades, joints, gaps, balconies, terraces, stairs, vertical and horizontal surfaces, gravestones, lower parts of vehicles from carbonaceous pollutants (soot), petroleum-based contaminants, organic dirt resulting from decay processes, road grime, sediment from car brake pads.

			min.	pcs per masterbox	pcs per pallet
S083164560	1000 ml	brown	1	6	432

Glass and mirror cleaner



Technical data:
- pH: 9 (undiluted at 20 °C)
- flash point: 78 °C

Application:
- glass and mirror cleaner effective in removing stubborn dirt
- cleans and polishes – ensures excellent clarity
- provides shine without leaving streaks or stains
- prevents dust adhesion, keeping surfaces clean for longer
- very efficient
- the 750 ml container is equipped with a dual-function spray trigger allowing spray or foam application, enabling adjustment of the application method to the level of soiling

			min.	pcs per masterbox	pcs per pallet
S083264588	750 ml	blue		12	556

Glass and mirror cleaner



Technical data:
- pH: 9 (undiluted at 20 °C)
- flash point: 78 °C

Application:
- glass and mirror cleaner effective in removing stubborn dirt
- cleans and polishes – ensures excellent clarity
- provides shine without leaving streaks or stains
- prevents dust adhesion, keeping surfaces clean for longer
- very efficient
- 1000 ml container: refill for topping up the liquid

			min.	pcs per masterbox	pcs per pallet
S083264589	1000 ml	blue		6	410

Health and safety pastes and creams

Hand washing paste



Technical data:
- consistency: creamy with natural abrasive materials
- pH: 4.8 – 5.0
- scent: lemony
- color: white

Application:
- hand cleaning: Removes dirt such as paint, grease, graphite, inks, adhesives, varnishes, bitumen, tar, resins, and soot from hands.
- skin care and regeneration: Leaves the skin feeling soft, moisturizes the skin with natural lipids, suitable for daily use without negative effects on the skin.

			min.	pcs per masterbox	pcs per pallet
S-64961	250 ml	light grey	1	24	1440

Construction chemicals

Universal foam hose



Technical data:
- yield: +/- 32 L (depending on temperature and humidity)
- application temperature: from -5 °C to +30 °C
- temperature resistance: from -40 °C to +90 °C
- can temperature: from +10 °C to +25 °C
- skin formation time: 5-10 minutes (at 20 °C / 60% RH)
- initial processing time: 25-30 minutes
- full curing time: 24 hours
- color: light yellow

Application:
- thermal and acoustic insulation of partition walls, bathtubs, shower trays, and water and sewer networks
- sealing during the installation of building joinery
- filling voids, gaps, cracks, and pipe penetrations
- sealing elements in frame construction

			min.	pcs per masterbox	pcs per pallet
S-64620	750 ml	light yellow	12	12	840

Universal foam



Technical data:
- yield: +/- 40 L (depending on temperature and humidity)
- application temperature: from -5 °C to +30 °C
- temperature resistance: from -40 °C to +90 °C
- can temperature: from +10 °C to +25 °C
- skin formation time: 5-10 minutes (at 20 °C / 90% RH)
- initial processing time: 25-30 minutes
- full curing time: 24 hours
- color: light yellow

Application:
- thermal and acoustic insulation of partition walls, bathtubs, shower trays, and water and sewer networks
- sealing during the installation of building joinery
- economical sealing and filling in building constructions
- sealing structural elements in frame construction

			min.	pcs per masterbox	pcs per pallet
S081264623	750 ml	light yellow	12	12	840

Professional XXL foam



Technical data:
- yield: up to 70 L (depending on temperature and humidity), 40% more than standard foam
- application temperature: from +5 °C to +30 °C
- temperature resistance: from -40 °C to +90 °C
- can temperature: from +10 °C to +25 °C
- skin formation time: 8-10 minutes (at 20 °C / 60% RH)
- initial processing time: 20-25 minutes
- full curing time: 24 hours
- color: light yellow

Application:
- sealing during the installation of wooden, PVC, and aluminum windows and doors
- sealing stair steps, roof joints, wall joints, and ceiling joints
- thermal and acoustic insulation of partition walls, bathtubs, shower trays, and water and sewer networks
- filling voids, gaps, cracks, and pipe penetrations
- sealing elements in frame construction

			min.	pcs per masterbox	pcs per pallet
S-64647	850 ml	light yellow	12	12	840

Foam winter



Technical data:
- yield: 42-48 L (depending on temperature and humidity)
- application temperature: from -10 °C to +30 °C
- temperature resistance: from -40 °C to +90 °C
- can temperature: from +10 °C to +25 °C
- skin formation time: 10-14 minutes (at 20 °C / 60% RH)
- initial processing time: 20-25 minutes
- full curing time: 24 hours (at 23 °C, 50% RH)
- color: light yellow

Application:
- sealing during the installation of PVC and aluminum windows and doors
- sealing stair steps, roof joints, wall joints, and ceiling joints
- thermal and acoustic insulation of partition walls, bathtubs, shower trays, and water and sewer networks
- filling voids, gaps, cracks, and pipe penetrations
- sealing elements in frame construction

			min.	pcs per masterbox	pcs per pallet
S-64653	750 ml	light yellow	12	12	840

Flame retardant foam



Technical data:
- yield: +/- 45 L (depending on temperature and humidity)
- application temperature: from +10 °C to +30 °C
- temperature resistance: from -40 °C to +90 °C
- can temperature: from +15 °C to +25 °C
- skin formation time: 12-16 minutes (at 20 °C / 90% RH)
- initial processing time: 20-25 minutes
- full curing time: 24 hours
- color: red-pink

Application:
- fire-resistant sealing
- filling elements of building partitions
- installing electrical boxes, rosettes, and distribution panels
- insulating elements of heating and plumbing systems

			min.	pcs per masterbox	pcs per pallet
S-64650	750 ml	red	12	12	840

Super fast glue



Technical data:
- yield: +/- 12 m² (depending on temperature and humidity)
- thermal conductivity: 0.036 W / (m K) at 20 °C
- application temperature: from +5 °C to +40 °C
- temperature resistance: from -40 °C to +90 °C
- can temperature: from +10 °C to +25 °C
- skin formation time: 60 seconds (at +23 °C / 50% RH)
- initial processing time: 8-10 minutes
- full curing time: 24 hours
- color: light yellow

Application:
- bonding of polystyrene and OSB boards
- bonding of stair elements and window sills
- bonding of lightweight decorative elements: panels, moldings, and rosettes
- bonding of gypsum boards

			min.	pcs per masterbox	pcs per pallet
S-64656	750 ml	light yellow	1	12	840

Polystyrene glue



Technical data:
- yield: 8 m² - 12 m² (depending on surface, temperature, and humidity)
- application temperature: from +0 °C to +30 °C
- temperature resistance: from -40 °C to +180 °C
- can temperature: from +10 °C to +25 °C
- skin formation time: 60 seconds (at +23 °C / 50% RH)
- initial processing time: 8-10 minutes
- full curing time: 24 hours (at +23 °C, 50% RH)
- drillability time: after 2 hours
- color: light yellow

Application:
- bonding XPS and EPS foam boards to mineral substrates with or without bituminous coating
- bonding in external thermal insulation composite systems (ETICS)
- insulating facades using BSO technology, both on new buildings with raw substrates and those already covered with traditional plaster
- installation of panels and window sills
- filling expansion joints in thermal insulation

			min.	pcs per masterbox	pcs per pallet
S-64659	750 ml	light yellow	1	12	840

Polyurethane foam cleaner



Technical data:
- density: 0.82 – 0.83 g/cm³
- dispensing system: manual, gun-type
- color: colorless
- properties: acetone-based

Application:
- for cleaning surfaces and application guns freshly contaminated with polyurethane foams and adhesives
- for cleaning valves, nozzles and guns for assembly and sealing foam
- degreasing steel surfaces before the application of polyurethanes and silicones

			min.	pcs per masterbox	pcs per pallet
S082464642	500 ml	transparent			

Masonry glue



Technical data:
- yield: up to 12 m² (depending on temperature and humidity)
- application temperature: from -5 °C to +25 °C
- temperature resistance: from -40 °C to +90 °C
- can temperature: from +10 °C to +25 °C
- skin formation time: 5-12 minutes (at +23 °C / 50% RH)
- initial processing time: 20-25 minutes
- full curing time: 24 hours
- color: gray

Application:
- masonry of load-bearing and partition walls using ceramic bricks, ground type P (vertically perforated, with a maximum surface deviation of +/- 3mm per meter using tongue-and-groove system)
- masonry of load-bearing and partition walls using silicate bricks, ground type P (vertically perforated, with a maximum surface deviation of +/- 3mm per meter using tongue-and-groove system)
- construction of houses in single-family or multi-family housing
- installation of bathroom and sanitary facilities in single-family, multi-family, developer, hotel, and industrial construction

			min.	pcs per masterbox	pcs per pallet
S-64662	750 ml	grey	1	12	840

Multi-pro silicone



Technical data:
- mass property: Neutral oxime
- shore A hardness ISO 868: 15 – 25
- application temperature: from +5 °C to +40 °C
- temperature resistance: from -40 °C to +180 °C
- skin formation time: ≈7 minutes (+23 °C / 50% RH)
- curing time: 2-3 mm/24 h

Application:
- sealing construction joints, expansion joints, and connections requiring high bonding strength both indoors and outdoors
- sealing building and structural elements made of concrete, brick, metals, gypsum boards, plastics, and wood
- sealing during the installation of window joinery, including roof windows
- used for glazing and bonding in the production of shower cabins

			min.	pcs per masterbox	pcs per pallet
S-64809	280 ml	white	1	12	1440
S-64812	280 ml	beige	1	12	1440
S-64815	280 ml	grey	1	12	1440
S-64818	280 ml	brown	1	12	1440
S-64821	280 ml	black	1	12	1440

Sanitary silicone



Technical data:
- mass type: acetic acid
- shore A hardness ISO 868: 15 – 25
- application temperature: from +5 °C to +40 °C
- temperature resistance: from -40 °C to +150 °C
- skin formation time: ≈ 20 minutes (+23 °C / 50% RH)
- curing time: 2-3 mm/24 h

Application:
- sealing construction joints, expansion joints, and connections in rooms with elevated humidity where mold growth is possible.
- sealing edges of bathtubs, sinks, shower cabins, and other sanitary appliances.
- sealing ceramics and glass, including decorative elements and glass blocks.
- sealing during minor home repairs.

			min.	pcs per masterbox	pcs per pallet
S-64794	280 ml	colorless	1	12	1440
S-64797	280 ml	white	1	12	1440

Universal silicone



Technical data:
- mass type: acetic acid
- shore A hardness ISO 868: 15 – 25
- application temperature: from +5 °C to +40 °C
- temperature resistance: from -40 °C to +150 °C
- skin formation time: ≈ 20 minutes (+23 °C / 50% RH)
- curing time: 2-3 mm/24 h

Application:
- sealing construction joints, expansion joints, and connections.
- sealing building elements and structures made of concrete, brick, gypsum boards, plastics, ceramics, clinker, glass, and wood.
- sealing during installation of door and window joinery.
- sealing for minor household tasks.

			min.	pcs per masterbox	pcs per pallet
S-64788	280 ml	colorless	1	12	1440
S-64791	280 ml	white	1	12	1440

Sanitary silicone neutral



Technical data:
- mass type: neutral oxime silicone
- shore A hardness ISO 868: 15 – 25
- application temperature: from +5 °C to +40 °C
- temperature resistance: from -40 °C to +150 °C
- skin formation time: 5-20 minutes (+23 °C / 50% RH)
- curing time: 2-3 mm/24 h

Application:
- sealing edges of bathtubs, sinks, shower cabins, and other sanitary appliances.
- sealing ceramics and glass, including decorative elements and glass blocks, as well as corner joints exposed to increased moisture.
- sealing sinks and grouting kitchen countertops, including those made of stone, marble, granite, and sandstone.
- sealing facades and external joints.

			min.	pcs per masterbox	pcs per pallet
S-64800	280 ml	colorless	1	12	1440
S-64803	280 ml	white	1	12	1440

High temperature silicone 300°C



Technical data:
- mass type: acetic acid (acetoxy) silicone
- shore A hardness ISO 868: 20 – 30
- application temperature: from +5 °C to +40 °C
- temperature resistance: up to 300 °C
- skin formation time: 20 minutes
- working time: 5-10 minutes
- curing time: 2-3 mm/24 h
- color: red

Application:
- sealing in boilers, furnaces, and machinery.
- due to its oil resistance, sealing between metal parts of engines, pumps, and gearboxes; acts as a type of liquid gasket.
- sealing in the heating industry.
- replaces all cork, felt, fiber, and rubber gaskets.

			min.	pcs per masterbox	pcs per pallet
S-64782	280 ml	red	1	12	1440

High temperature packing 1200°C



Technical data:
- mass type: sodium silicate
- application temperature: from +5 °C to +40 °C
- temperature resistance: from -20 °C to +1200 °C, occasionally up to +1600 °C
- skin formation time: 10-20 minutes
- curing time: 2-3 mm/24 h

Application:
- sealing furnaces, chimneys, and grates.
- sealing cracks, gaps, and voids in chimney flues.
- repairing building and technical elements exposed to direct fire.
- installing stoves and grills.

			min.	pcs per masterbox	pcs per pallet
S-64785	300 ml	black	1	12	1440

Flexible lightweight acrylic



Technical data:
- mass type: water-based acrylic dispersion
- hardness (Shore A ISO 868): 20 – 25
- application temperature: from +5 °C to +30 °C
- temperature resistance: from -20 °C to +75 °C
- skin formation time: ≈5 minutes (+23 °C / 50%RH)

Application:
- filling cracks, fissures, and joints in walls and ceilings.
- sealing door frames, window frames, sills, and balustrades.
- joining structural and construction elements subjected to low stresses, for static connections with low deformation.
- sealing corners and joints in gypsum board constructions, suspended ceilings, built-in wardrobes, molding strips, skirting boards, and cornices.
- masking screws and other mechanical fasteners, non-shrinking jointing of gypsum plasterboards.

			min.	pcs per masterbox	pcs per pallet
S-64773	300 ml	white	1	12	1440

Universal acrylic



Technical data:
- mass type: acrylic water-based dispersion
- shore A hardness ISO 868: 20 – 25
- application temperature: from +5 °C to +40 °C
- temperature resistance: -20 °C to +70 °C
- skin formation time: 10-15 minutes (+23 °C / 50% RH)

Application:
- filling in cracks, fissures, and joints in walls and ceilings.
- sealing door frames, window frames, sills, and balustrades.
- sealing of structural and construction elements subjected to low stresses, for static joints with low deformation.
- sealing corners and joints in gypsum board installations, suspended ceilings, wardrobe cabinets, finishing strips, plinths, and cornices.

			min.	pcs per masterbox	pcs per pallet
S-64770	280 ml	white	1	12	1440

Acrylic express fast



Technical data:
- mass type: water-based acrylic dispersion
- hardness (Shore A ISO 868): 65 – 70
- application temperature: from +5 °C to +40 °C
- temperature resistance: from -20 °C to +75 °C
- skin formation time: 10-15 minutes (+23 °C / 50%RH)

Application:
- filling cracks, fissures, and joints in walls and ceilings.
- sealing door frames, window frames, sills, and balustrades.
- joining structural and construction elements subjected to low stresses, for static connections with low deformation.
- sealing corners and joints in gypsum board constructions, suspended ceilings, built-in wardrobes, molding strips, skirting boards, and cornices.
- masking screws and other mechanical fasteners, non-shrinking jointing of gypsum plasterboards.

			min.	pcs per masterbox	pcs per pallet
S-64776	280 ml	white	1	12	1440

Granular acrylic for facade



Technical data:
- mass type: water-based acrylic dispersion
- hardness (Shore A ISO 868): 30 – 40
- application temperature: from +5 °C to +40 °C
- temperature resistance: from -20 °C to +75 °C
- skin formation time: 10-15 minutes (+23 °C / 50%RH)

Application:
- filling cracks, fissures, and joints in walls and ceilings.
- sealing door frames, window frames, sills, and balustrades.
- joining structural and construction elements subjected to low stresses, for static connections with low deformation.
- sealing and repairing cracks on facades and plaster.

			min.	pcs per masterbox	pcs per pallet
S-64779	280 ml	white	1	12	1440

Acrylic primer



Technical data:
- coverage: 7–10 m²/1 L (depending on substrate absorbency)
- application temperature: from +5 °C to +35 °C
- drying time: 4–24 h, depending on conditions
- odor: weak, characteristic
- specific gravity: 1.0 g/cm³

Application:
- efficient primer for substrates with high absorbency and porosity
- improves adhesion, stabilizes absorbency and provides a strengthening effect
- contains extremely fine particles in its structure, penetrates deep into the pores of the material, binding the applied layers
- after drying, forms a coating that increases adhesion of adhesive mortars and other surface compounds to the substrate
- increases scratch resistance
- regulates substrate absorbency and water vapor exchange
- reduces paint consumption
- for interior and exterior use – preparation of absorbent surfaces before application of paints, plasters, adhesives, skim coats, leveling and filling compounds
- priming of gypsum plasterboards, concrete substrates, aerated concrete, gypsum, cement and cement-lime plasters

			min.	pcs per masterbox	pcs per pallet
S081564325	1000 ml	white		1	324

Acrylic primer



Technical data:
- efficiency: approx. 10 m²/1L
- application temperature: from +5 °C to +25 °C
- drying time: 4-24 h, depending on the conditions
- time for complete hardening of the coating: 24 h
- odor: weak characteristic
- density: 1.0 g/cm³ +20 °C
- color: white

Application:
- priming typical absorbent and porous construction substrates such as concrete, aerated concrete, gypsum blocks, plasterboards, gypsum, lime and cement-lime plasters, cement and anhydrite screeds
- preparation of the surface for paints, plasters, wallpapers, screed, self-leveling floors, putties, adhesives for ceramic tiles
- protective coating for screeds, facilitates maintenance and prevents dust accumulation

			min.	pcs per masterbox	pcs per pallet
S081564327	5 l	white	1	1	108

Rubber roofing sealant



Technical data:
- mass type: synthetic rubber
- hardness (Shore A ISO 868): 16 ± 3
- application temperature: from +5 °C to +40 °C
- temperature resistance: from -20 °C to +90 °C
- skin formation time: 3-15 minutes (+23 °C / 55%RH)
- curing time: 1-2 mm/24h (+23 °C / 55%RH)
- color: clear

Application:
- sealing joints of building elements made of sheet metal, steel, concrete, wood, and selected plastics.
- sealing joints of metal roofing, sheet metal tiles, flashings, domed roofs, ridge edges, gutters, downspouts, skylight collars, and cracks in bituminous sheet coverings, as well as sealing of steel structures, corrugated and profiled sheets.
- sealing of sheet metal facade panels, sills, and balustrades.
- designed for sealing dry, wet, and oily surfaces.

			min.	pcs per masterbox	pcs per pallet
S081464831	280 ml	colorless	1	12	1440
S081464834	280 ml	black	1	12	1440
S081464835	280 ml	brown	1	12	1440

Bituminous roof sealant



Technical data:
- mass type: bitumen-based chemical with solvents
- hardness (Shore A ISO 868): 10 – 15
- application temperature: from +5 °C to +35 °C
- temperature resistance: from -30 °C to +80 °C
- skin formation time: ≈30 minutes (+23 °C / 55% RH)
- curing time: 1-2 mm/24h (+23 °C / 55% RH)
- color: black

Application:
- rapid repairs of leaks in roofs and gutters.
- sealing joints in roofing materials such as felt, roof tiles, sheet metal, corrugated sheets.
- sealing of ventilation, air conditioning, and exhaust ducts.
- sealing cracks and fissures in bituminous roof coverings.
- filling grooves and joints during the application of moisture-proofing insulation in buildings using asphalt-solvent-based compounds.

			min.	pcs per masterbox	pcs per pallet
S-64833	280 ml	black	1	12	1440

Crystalline hybrid glue



Technical data:
- mass property: MS polymer
- shore A hardness ISO 886: 30 – 35
- application temperature: from +5 °C to +30 °C
- temperature resistance: from -40 °C to +90 °C
- skin formation time: 10-20 minutes (at +23 °C / 50% RH)
- curing time: 2-3 mm/24h

Application:
- bonding in construction both outdoors and indoors
- bonding concrete, marble, plastics, bricks, steel, aluminum, glass, styrodur (XPS), polystyrene (EPS), PVC, polyester, cork, sheet metal, wood, plywood
- for flexible joining of structures exposed to vibrations, brackets, and supports in industrial and residential buildings
- making invisible connections between different materials
- construction and sanitary sealing

			min.	pcs per masterbox	pcs per pallet
S-64842	290 ml	crystalline	1	12	1440

Elastic polymer glue



Technical data:
- mass property: MS polymer
- shore A hardness ISO 886: 35 – 40
- application temperature: from +5 °C to +30 °C
- temperature resistance: from -40 °C to +90 °C
- skin formation time: ≈25 minutes (at +23 °C / 50% RH)
- curing time: 2-3 mm/24h

Application:
- bonding in construction both outdoors and indoors
- bonding window sills and moldings, connecting blinds and Venetian blinds
- bonding panels and roof coverings
- bonding structures exposed to vibrations
- for making and renovating expansion joints

			min.	pcs per masterbox	pcs per pallet
S-64839	290 ml	grey	1	12	1440

Skirting glue



Technical data:
- mass property: Synthetic resins and organic solvent
- application temperature: from +10 °C to +30 °C
- temperature resistance: from -15 °C to +80 °C
- skin formation time: ≈15 minutes (at +23 °C / 50% RH)
- full curing time: 24 hours

Application:
- bonding in construction both outdoors and indoors
- bonding and fixing building materials such as concrete, bricks, wood, glass, ceramics, metals, and some types of plastics
- bonding skirting boards, wall panels, and finishing elements made of wood, MDF, HDF
- bonding decorative elements, for small household repairs and hobbies

			min.	pcs per masterbox	pcs per pallet
S-64860	300 ml	beige	1	12	1440

Structural wood glue



Technical data:
- mass property: Polyurethane
- shore ISO 886 hardness: 40 ± 5
- application temperature: from +5 °C to +35 °C
- temperature resistance: from -40 °C to +110 °C
- skin formation time: ≈8 minutes (at +23 °C / 50% RH)
- curing time: 2-3 mm/24h

Application:
- bonding in construction both outdoors and indoors, especially in structural [B] Application with high humidity
- professional fixing and bonding of wooden elements such as window and door corners, skirting boards, and laminate flooring
- excellent water resistance (D4) allows for use in all carpentry and joinery work outdoors
- bonding where quick curing and mechanical load-bearing are required

			min.	pcs per masterbox	pcs per pallet
S-64851	300 ml	beige	1	12	1440

Fixing water-based glue



Technical data:
- mass property: Acrylic dispersion
- application temperature: from +5 °C to +40 °C
- temperature resistance: from -25 °C to +75 °C
- skin formation time: 25-30 minutes (at +23 °C / 50% RH)
- curing time: 2-3 mm/24h

Application:
- bonding of building materials and finishing elements made of wood, wood-based materials (e.g., cork, plywood, MDF, chipboard), polystyrene (including styrofoam), PVC, and similar plastics (excluding PE, PP), ceramics, gypsum
- adhesion of decorative elements such as moldings, rosettes, panels, cornices, stucco, masking profiles, insulation boards, wall panels, radiator screens

			min.	pcs per masterbox	pcs per pallet
S-64836	280 ml	white	1	12	1440

Elastic polyurethane glue



Technical data:
- mass property: Polyurethane
- shore A hardness ISO 886: 40 ± 5
- application temperature: from +5 °C to +40 °C
- temperature resistance: from -40 °C to +90 °C
- skin formation time: ≈7 minutes (at +23 °C / 50% RH)
- curing time: 2-3 mm/24h

Application:
- bonding of materials and metal structures both indoors and outdoors
- filling horizontal expansion joints in industrial floors and parking lots
- filling vertical gaps and expansion joints, acoustic insulation
- bonding window sills, thresholds, and steps
- sealing and bonding various materials in automotive and shipbuilding industries

			min.	pcs per masterbox	pcs per pallet
S-64854	300 ml	black	1	12	1440

Mirror glue



Technical data:
- mass property: Neutral oxime silicone
- shore A hardness ISO 886: 35 – 45
- application temperature: from +5 °C to +40 °C
- temperature resistance: from -40 °C to +180 °C
- skin formation time: ≈7 minutes (at +23 °C / 50% RH)
- curing time: 2-3 mm/24h

Application:
- bonding bathroom and dressing room mirrors to various surfaces
- mounting mirrors in metal and wooden frames
- bonding glass mosaic, decorative glass, and lacquered glass (including in systems with sliding doors), glass elements, glazed, enameled, and glazed
- grouting mirror edges, but only after the adhesive has fully dried

			min.	pcs per masterbox	pcs per pallet
S-64857	280 ml	white	1	12	1440



Hybrid glue



Technical data:

- mass property: MS polymer hybrid
- shore A hardness ISO 886: 55 ± 3
- application temperature: from +5 °C to +40 °C
- temperature resistance: from -40 °C to +90 °C
- skin formation time: ≈5 minutes (at +23 °C / 50% RH)
- curing time: 2-3 mm/24h

Application:

- bonding in construction both outdoors and indoors, especially under very high loads requiring strong initial grip
- bonding of concrete, marble, plastics, bricks, steel, aluminum, glass, styrodur (XPS), polystyrene (EPS), PVC, polyester, cork, sheet metal, wood, plywood
- for flexible joining of structures exposed to vibrations, brackets, and supports in industrial and residential buildings
- construction and sanitary sealing

			min.	pcs per masterbox	pcs per pallet
S-64845	290 ml	white	1	12	1560

STALCO



OCCUPATIONAL SAFETY AND HEALTH

Clothing

Work Trousers



65% POLYESTER 35% COTTON | 260 g/m² | CE Cat. I | EN ISO 13688



Basic Line
- triple seams
- reinforcements on the knees
- numerous multifunctional pockets
- pockets for knee pads
- reflective elements

S090147853	XS	gray	1/10	pc
S090147854	S	gray	1/10	pc
S090147856	M	gray	1/10	pc
S090147858	L	gray	1/10	pc
S090147860	XL	gray	1/10	pc
S090147862	2XL	gray	1/10	pc
S090147863	3XL	gray	1/10	pc
S090147865	4XL	gray	1/10	pc
S090151013	XS	black	1/10	pc
S090151014	S	black	1/10	pc
S090151016	M	black	1/10	pc
S090151018	L	black	1/10	pc
S090151020	XL	black	1/10	pc
S090151022	2XL	black	1/10	pc
S090151024	3XL	black	1/10	pc
S090151026	4XL	black	1/10	pc
S090191002	XS	navy blue	1/10	pc
S090101020	S	navy blue	1/10	pc
S090101021	M	navy blue	1/10	pc
S090101022	L	navy blue	1/10	pc
S090101023	XL	navy blue	1/10	pc
S090101024	2XL	navy blue	1/10	pc
S090101025	3XL	navy blue	1/10	pc
S090101026	4XL	navy blue	1/10	pc

Work Trousers



UNI | 60% COTTON 40% POLYESTER | 280 g/m² | CE Cat. I | EN ISO 13688

Allround Line
- double seams
- many high-strength fabric reinforcements OXFORD 300D
- numerous multifunctional pockets
- flexible belt increasing the comfort of use
- additional bolts securing the places most prone to tearing
- reflective elements

S090144421	S	gray	1/10	pc
S090144423	M	gray	1/10	pc
S090144427	L	gray	1/10	pc
S090144429	XL	gray	1/10	pc
S090144431	2XL	gray	1/10	pc
S090144432	3XL	gray	1/10	pc

Work Trousers



65% POLYESTER 35% COTTON | 210 g/m² | CE Cat. I | EN ISO 13688

Summer Line
- made of high-quality polycotton with increased resistance to dirt
- maintains parameters even when washed frequently
- high-strength fabric reinforcements OXFORD 900D
- flexible belt increasing the comfort of use
- additional bolts securing the places most prone to tearing
- reflective elements

S090144584	XS	beige	1/10	pc
S090144585	S	beige	1/10	pc
S090144586	M	beige	1/10	pc
S090144588	L	beige	1/10	pc
S090144589	XL	beige	1/10	pc
S090144590	2XL	beige	1/10	pc
S090144591	3XL	beige	1/10	pc

Work Trousers



97% COTTON 3% SPANDEX | 270 g/m² | CE Cat. I | EN ISO 13688

Industry Line
- high-quality cotton with added spandex, provides exceptional comfort during use
- triple seams
- high-strength fabric reinforcements OXFORD 500D
- numerous multifunctional pockets
- flexible belt increasing the comfort of use
- additional bolts securing the places most prone to tearing
- reflective elements
- modern design

S090142101	S	navy blue	1/10	pc
S090142103	M	navy blue	1/10	pc
S090142107	L	navy blue	1/10	pc
S090142109	XL	navy blue	1/10	pc
S090142111	2XL	navy blue	1/10	pc

Reflective work trousers







60% COTTON 40% POLYESTER | 260 g/m² | CE Cat. II | EN ISO 13688 | EN ISO 20471 | 2

Basic Neon Line
- certified neon fabric with cotton
- reflective strips 75 mm
- contrasting elements
- triple stitching
- leg bottoms in OXFORD 600D with PU
- legs can be lengthened by 4.5 cm
- seam reinforcement bolts
- metal zip in the zipper
- OXFORD 600D knee pockets for foam inserts
- 11 functional pockets made of OXFORD 600D
- 1 wide velcro loop

S090151640	S	yellow	1/10	pc
S090151642	M	yellow	1/10	pc
S090151644	L	yellow	1/10	pc
S090151646	XL	yellow	1/10	pc
S090151648	2XL	yellow	1/10	pc
S090151650	3XL	yellow	1/10	pc
S090151652	4XL	yellow	1/10	pc
S090151654	S	orange	1/10	pc
S090151656	M	orange	1/10	pc
S090151658	L	orange	1/10	pc
S090151660	XL	orange	1/10	pc
S090151662	2XL	orange	1/10	pc
S090151664	3XL	orange	1/10	pc
S090151666	4XL	orange	1/10	pc

Work Trousers 2In1



65% POLYESTER 35% COTTON 4% SPANDEX | 245 g/m² | CE Cat. I | EN ISO 13688

Moro
- made in Poland
- double seams
- specially developed structure with a wedge significantly increases the comfort of use
- the pants can be transformed into board shorts (removable lower legs)
- additionally the loops include a strong tape belt with a snap buckle
- additional bolts securing the places most prone to tearing
- reflective elements

S090142172	XS	gray	1/10	pc
S090142173	S	gray	1/10	pc
S090142175	M	gray	1/10	pc
S090142177	L	gray	1/10	pc
S090142179	XL	gray	1/10	pc
S090142181	2XL	gray	1/10	pc
S090142182	3XL	gray	1/10	pc
S090142184	4XL	gray	1/10	pc
S090142186	5XL	gray	1/10	pc

Work Trousers



65% POLYESTER 35% COTTON | 220 g/m² | CE Cat. I | EN ISO 13688

Fast
- breathable material with cotton
- gusset in the crotch
- triple stitching
- ergonomically shaped knees
- reflective elements
- contrast details
- 7 functional pockets
- elastic waistband
- reinforced metal button
- key holder – plastic D-ring
- branding area available

S090100007	XS	gray	1/10	pc
S090100008	S	gray	1/10	pc
S090100009	M	gray	1/10	pc
S090100010	L	gray	1/10	pc
S090100011	XL	gray	1/10	pc
S090100012	2XL	gray	1/10	pc
S090100013	3XL	gray	1/10	pc
S090100014	4XL	gray	1/10	pc
S090100015	5XL	gray	1/10	pc

Work Trousers







Stinger
- high-quality softshell, stretch fabric
- 4-way stretch fabric
- legs finished with an elastic band with a stopper
- ventilation - zippers on the back with mesh
- pockets on knees for foam inserts
- numerous functional pockets
- elastic rubber in waist

S090144701	XS	black	1/10	pc
S090144700	S	black	1/10	pc
S090144702	M	black	1/10	pc
S090144704	L	black	1/10	pc
S090144706	XL	black	1/10	pc
S090144708	2XL	black	1/10	pc
S090144710	3XL	black	1/10	pc
S090144712	4XL	black	1/10	pc
S090144713	XS	blue	1/10	pc
S090144714	S	blue	1/10	pc
S090144716	M	blue	1/10	pc
S090144718	L	blue	1/10	pc
S090144720	XL	blue	1/10	pc
S090144722	2XL	blue	1/10	pc
S090144724	3XL	blue	1/10	pc
S090144726	4XL	blue	1/10	pc
S090191003	XS	gray	1/10	pc
S090101000	S	gray	1/10	pc
S090101001	M	gray	1/10	pc
S090101002	L	gray	1/10	pc
S090101003	XL	gray	1/10	pc
S090101004	2XL	gray	1/10	pc
S090101005	3XL	gray	1/10	pc
S090101006	4XL	gray	1/10	pc
S090144727	XS	khaki	1/10	pc
S090144728	S	khaki	1/10	pc
S090144729	M	khaki	1/10	pc
S090144730	L	khaki	1/10	pc
S090144731	XL	khaki	1/10	pc
S090144732	2XL	khaki	1/10	pc
S090144733	3XL	khaki	1/10	pc
S090144734	4XL	khaki	1/10	pc
S090144735	XS	dark beige	1/10	pc
S090144736	S	dark beige	1/10	pc
S090144737	M	dark beige	1/10	pc
S090144738	L	dark beige	1/10	pc
S090144739	XL	dark beige	1/10	pc
S090144740	2XL	dark beige	1/10	pc
S090144741	3XL	dark beige	1/10	pc
S090144742	4XL	dark beige	1/10	pc

Work pants





Painter
- flexible material with softshell properties
- modern cut and print
- high-quality sewing
- triple seams reinforced with bolts
- 4-way stretch
- leg bottoms finished with an elastic band with a stopper
- ventilation - zippers on the back with mesh
- pockets on the knees for foam inserts
- 9 pockets, including those fastened with zippers 2 on the waist and 1 on the left leg
- reflective panels
- elastic waistband

S090191039	XS	white	1/10	pc
S090101027	S	white	1/10	pc
S090101028	M	white	1/10	pc
S090101029	L	white	1/10	pc
S090101030	XL	white	1/10	pc
S090101031	2XL	white	1/10	pc
S090101032	3XL	white	1/10	pc
S090101033	4XL	white	1/10	pc

Winter trousers





Winter Basic Line
- material with cotton
- lining
- triple stitching
- point seam-reinforcing
- reflective elements
- metal zipper in the fly
- knee pockets made of OXFORD 300D with foam inserts
- numerous, functional pockets made of OXFORD 300D
- elastic waistband
- strong studded button

S090151760	S	gray	1/10	pc
S090151762	M	gray	1/10	pc
S090151764	L	gray	1/10	pc
S090151766	XL	gray	1/10	pc
S090151768	2XL	gray	1/10	pc
S090151770	3XL	gray	1/10	pc
S090151772	4XL	gray	1/10	pc

Work Shorts



65% POLYESTER 35% COTTON | 260 g/m² | CE Cat. I | EN ISO 13688



Basic Line
- triple seams
- numerous multifunctional pockets,
- reflective elements

S090247881	XS	gray	1/10	pc
S090247884	S	gray	1/10	pc
S090247886	M	gray	1/10	pc
S090247888	L	gray	1/10	pc
S090247890	XL	gray	1/10	pc
S090247892	2XL	gray	1/10	pc
S090247898	3XL	gray	1/10	pc
S090247899	4XL	gray	1/10	pc
S090251041	XS	black	1/10	pc
S090251042	S	black	1/10	pc
S090251044	M	black	1/10	pc
S090251046	L	black	1/10	pc
S090251048	XL	black	1/10	pc
S090251050	2XL	black	1/10	pc
S090251052	3XL	black	1/10	pc
S090251054	4XL	black	1/10	pc
S090292001	XS	navy blue	1/10	pc
S090200000	S	navy blue	1/10	pc
S090200001	M	navy blue	1/10	pc
S090200002	L	navy blue	1/10	pc
S090200003	XL	navy blue	1/10	pc
S090200004	2XL	navy blue	1/10	pc
S090200005	3XL	navy blue	1/10	pc
S090200006	4XL	navy blue	1/10	pc

Work Shorts



65% POLYESTER 35% COTTON | 210 g/m² | CE Cat. I | EN ISO 13688

Summer Line
- made of high-quality polycotton with increased resistance to dirt
- maintains parameters even when washed frequently
- high-strength fabric reinforcements OXFORD 900D
- flexible belt increasing the comfort of use
- additional bolts securing the places most prone to tearing
- reflective elements

S090244592	XS	beige	1/10	pc
S090244601	S	beige	1/10	pc
S090244602	M	beige	1/10	pc
S090244604	L	beige	1/10	pc
S090244605	XL	beige	1/10	pc
S090244606	2XL	beige	1/10	pc
S090244600	3XL	beige	1/10	pc

Work Shorts



94% POLYESTER 6% SPANDEX | 200 g/m² | CE Cat. I | EN ISO 13688

Stinger
- high-quality softshell, stretch fabric
- 4-way stretch fabric
- ventilation - zippers on the back with mesh
- numerous functional pockets
- elastic rubber in waist

S090292002	XS	gray	1/10	pc
S090200014	S	gray	1/10	pc
S090200015	M	gray	1/10	pc
S090200016	L	gray	1/10	pc
S090200017	XL	gray	1/10	pc
S090200018	2XL	gray	1/10	pc
S090200019	3XL	gray	1/10	pc
S090200020	4XL	gray	1/10	pc

Work Shorts



94% POLYESTER 6% SPANDEX | 200 g/m² | CE Cat. I | EN ISO 13688

Painter
- flexible material with softshell properties
- modern cut and print
- high-quality sewing
- triple seams reinforced with bolts
- 4-way stretch
- 9 pockets including zippered pockets 2 at the waist and 1 on the left leg
- reflective panels
- elastic waistband

S090292003	XS	white	1/10	pc
S090200007	S	white	1/10	pc
S090200008	M	white	1/10	pc
S090200009	L	white	1/10	pc
S090200010	XL	white	1/10	pc
S090200011	2XL	white	1/10	pc
S090200012	3XL	white	1/10	pc
S090200013	4XL	white	1/10	pc

Work Bib Trousers





65% POLYESTER 35% COTTON | 260 g/m² | Cat. I | EN ISO 13688

Basic Line Grey
- triple seams
- great comfort of movement due to the elastic belt and shoulder straps
- multifunctional pockets
- reflective elements
- pockets for knee pads

S090347864	S	gray	1/10	pc
S090347866	M	gray	1/10	pc
S090347868	L	gray	1/10	pc
S090347870	XL	gray	1/10	pc
S090347872	2XL	gray	1/10	pc
S090347873	3XL	gray	1/10	pc
S090347875	4XL	gray	1/10	pc
S090351028	S	black	1/10	pc
S090351030	M	black	1/10	pc
S090351032	L	black	1/10	pc
S090351034	XL	black	1/10	pc
S090351036	2XL	black	1/10	pc
S090351038	3XL	black	1/10	pc
S090351040	4XL	black	1/10	pc
S090300000	S	navy blue	1/10	pc
S090300001	M	navy blue	1/10	pc
S090300002	L	navy blue	1/10	pc
S090300003	XL	navy blue	1/10	pc
S090300004	2XL	navy blue	1/10	pc
S090300005	3XL	navy blue	1/10	pc
S090300006	4XL	navy blue	1/10	pc

Work Bib Trousers



97% COTTON 3% SPANDEX | 270 g/m² | Cat. I | EN ISO 13688

Industry Line
- high-quality cotton with added spandex, provides exceptional comfort during use
- triple seams
- high-strength fabric reinforcements OXFORD 500D
- rubber sewn into the belt and harness for increased comfort of movement
- numerous multifunctional pockets
- additional bolts securing the places most prone to tearing
- reflective elements
- modern design

S090342113	S	navy blue	1/10	pc
S090342115	M	navy blue	1/10	pc
S090342119	L	navy blue	1/10	pc
S090342121	XL	navy blue	1/10	pc
S090342123	2XL	navy blue	1/10	pc

Reflective dungarees





60% COTTON 40% POLYESTER | 260 g/m² | Cat. II | EN ISO 13688 | EN ISO 20471 | 2

Basic Neon Line
- certified neon fabric with cotton
- reflective strips 75 mm
- contrasting elements
- triple stitching
- leg bottoms in OXFORD 600D with PU
- legs can be lengthened by 4.5 cm
- metal zip in the zipper
- OXFORD 600D knee pockets for foam inserts
- 14 functional pockets made of OXFORD 600D
- partially elastic braces
- plastic brace snap fasteners

S090351668	S	yellow	1/10	pc
S090351670	M	yellow	1/10	pc
S090351672	L	yellow	1/10	pc
S090351674	XL	yellow	1/10	pc
S090351676	2XL	yellow	1/10	pc
S090351678	3XL	yellow	1/10	pc
S090351680	4XL	yellow	1/10	pc
S090351682	S	orange	1/10	pc
S090351684	M	orange	1/10	pc
S090351686	L	orange	1/10	pc
S090351688	XL	orange	1/10	pc
S090351690	2XL	orange	1/10	pc
S090351692	3XL	orange	1/10	pc
S090351694	4XL	orange	1/10	pc

Work Jacket



65% POLYESTER 35% COTTON | 260 g/m² | CE Cat. I | EN ISO 13688



Basic Line Grey
- numerous reinforcements
- ventilation system
- multifunctional pockets
- reflective elements

S090447874	S	gray	1/10	pc
S090447876	M	gray	1/10	pc
S090447878	L	gray	1/10	pc
S090447880	XL	gray	1/10	pc
S090447882	2XL	gray	1/10	pc
S090447883	3XL	gray	1/10	pc
S090447885	4XL	gray	1/10	pc
S090451000	S	black	1/10	pc
S090451002	M	black	1/10	pc
S090451004	L	black	1/10	pc
S090451006	XL	black	1/10	pc
S090451008	2XL	black	1/10	pc
S090451010	3XL	black	1/10	pc
S090451012	4XL	black	1/10	pc
S090400000	S	navy blue	1/10	pc
S090400001	M	navy blue	1/10	pc
S090400002	L	navy blue	1/10	pc
S090400003	XL	navy blue	1/10	pc
S090400004	2XL	navy blue	1/10	pc
S090400005	3XL	navy blue	1/10	pc
S090400006	4XL	navy blue	1/10	pc

Work Jacket



60% COTTON 40% POLYESTER | 280 g/m² | CE Cat. I | EN ISO 13688

Allround Line Grey
- reinforced on shoulders and dowels
- numerous multifunctional pockets
- cuffs with press-studs allowing the dowels to be folded up easily
- reflective elements

S090444401	S	gray	1/10	pc
S090444403	M	gray	1/10	pc
S090444405	LS	gray	1/10	pc
S090444407	L	gray	1/10	pc
S090444409	XL	gray	1/10	pc
S090444411	2XL	gray	1/10	pc
S090444412	2XL	gray	1/10	pc

Men's Sweatshirt



60% COTTON 40% POLYESTER | 320 g/m² | CE Cat. I | EN ISO 13688



Igor
- double-sided interlock knit with high cotton content
- universal fit
- high stand-up collar
- sleeves finished with ribbed cuffs
- heavy-duty molded zipper
- chin-protection flap
- 2 zippered waist pockets
- bottom finished with ribbing
- contrast elements
- branding area available

S090491021	S	black	1/10	pc
S090491022	M	black	1/10	pc
S090491023	L	black	1/10	pc
S090491024	XL	black	1/10	pc
S090491025	2XL	black	1/10	pc
S090491026	3XL	black	1/10	pc
S090491027	4XL	black	1/10	pc
S090491028	S	navy blue	1/10	pc
S090491029	M	navy blue	1/10	pc
S090491030	L	navy blue	1/10	pc
S090491031	XL	navy blue	1/10	pc
S090491032	2XL	navy blue	1/10	pc
S090491033	3XL	navy blue	1/10	pc
S090491034	4XL	navy blue	1/10	pc

Hoodie



70% COTTON 30% POLYESTER | 280 g/m² | CE Cat. I | EN ISO 13688



Pora
- classic sweatshirt
- large patch pockets on the front
- lycra-reinforced welts

S090444461	S	navy blue	1/20	pc
S090444463	M	navy blue	1/20	pc
S090444465	L	navy blue	1/20	pc
S090444467	XL	navy blue	1/20	pc
S090444469	2XL	navy blue	1/20	pc
S090444470	3XL	navy blue	1/20	pc
S090444471	S	gray	1/20	pc
S090444473	M	gray	1/20	pc
S090444475	L	gray	1/20	pc
S090444477	XL	gray	1/20	pc
S090444479	2XL	gray	1/20	pc
S090444480	3XL	gray	1/20	pc
S090444679	S	black	1/20	pc
S090444680	M	black	1/20	pc
S090444681	L	black	1/20	pc
S090444682	XL	black	1/20	pc
S090444683	2XL	black	1/20	pc
S090444684	3XL	black	1/20	pc

Fleece Jacket





Barry
- high thermal insulation properties
- resistance to crushing and pilling
- quick-drying and easy-care fabric

S090444540	XS	navy blue	1/20	pc
S090444541	S	navy blue	1/20	pc
S090444543	M	navy blue	1/20	pc
S090444545	L	navy blue	1/20	pc
S090444547	XL	navy blue	1/20	pc
S090444549	2XL	navy blue	1/20	pc
S090444551	3XL	navy blue	1/20	pc
S090444552	4XL	navy blue	1/20	pc
S090444550	XS	gray	1/20	pc
S090444553	S	gray	1/20	pc
S090444555	M	gray	1/20	pc
S090444557	L	gray	1/20	pc
S090444559	XS	gray	1/20	pc
S090444561	2XL	gray	1/20	pc
S090444563	3XL	gray	1/20	pc
S090444564	4XL	gray	1/20	pc
S090451061	S	red	1/20	pc
S090451063	M	red	1/20	pc
S090451065	L	red	1/20	pc
S090451067	XL	red	1/20	pc
S090451069	2XL	red	1/20	pc
S090451071	3XL	red	1/20	pc
S090451073	4XL	red	1/20	pc
S090451075	S	blue	1/20	pc
S090451077	M	blue	1/20	pc
S090451079	L	blue	1/20	pc
S090451081	XL	blue	1/20	pc
S090451083	2XL	blue	1/20	pc
S090451085	3XL	blue	1/20	pc
S090451087	4XL	blue	1/20	pc
S090451088	XS	black	1/20	pc
S090451089	S	black	1/20	pc
S090451091	M	black	1/20	pc
S090451093	L	black	1/20	pc
S090451095	XL	black	1/20	pc
S090451097	2XL	black	1/20	pc
S090451099	3XL	black	1/20	pc
S090451101	4XL	black	1/20	pc
S090407000	S	khaki	1/20	pc
S090407001	M	khaki	1/20	pc
S090407002	L	khaki	1/20	pc
S090407003	XL	khaki	1/20	pc
S090407004	2XL	khaki	1/20	pc
S090407005	3XL	khaki	1/20	pc
S090407006	4XL	khaki	1/20	pc

Fleece safety jacket





Basic Neon Line
- quick-drying fleece knitted fabric
- reflective strips 50 mm
- thermal insulation properties
- with zipper
- 2 waist pockets with zips
- 1 Napoleon pocket with zip
- sleeves with elastic waist adjustment – elastic with stoppers
- available in 2 colours

S090451700	S	yellow	1/20	pc
S090451702	M	yellow	1/20	pc
S090451704	L	yellow	1/20	pc
S090451706	XL	yellow	1/20	pc
S090451708	2XL	yellow	1/20	pc
S090451710	3XL	yellow	1/20	pc
S090451712	4XL	yellow	1/20	pc
S090451714	S	orange	1/20	pc
S090451716	M	orange	1/20	pc
S090451718	L	orange	1/20	pc
S090451720	XL	orange	1/20	pc
S090451722	2XL	orange	1/20	pc
S090451724	3XL	orange	1/20	pc
S090451726	4XL	orange	1/20	pc

Flannel Shirt





Square
- naturally breathing cotton flannel with a strong weave
- pleasant fluff for increased thermal insulation
- classic shirt design

S090542019	S	red	1/20	pc
S090542021	M	red	1/20	pc
S090542023	L	red	1/20	pc
S090542025	XL	red	1/20	pc
S090542027	2XL	red	1/20	pc
S090542028	3XL	red	1/20	pc
S090542030	S	blue	1/20	pc
S090542031	M	blue	1/20	pc
S090542033	L	blue	1/20	pc
S090542035	XL	blue	1/20	pc
S090542037	2XL	blue	1/20	pc
S090542038	3XL	blue	1/20	pc
S090551150	S	gray	1/20	pc
S090551152	M	gray	1/20	pc
S090551154	L	gray	1/20	pc
S090551156	XL	gray	1/20	pc
S090551158	2XL	gray	1/20	pc
S090551160	3XL	gray	1/20	pc

T-Shirt










Bono
- classic cotton T-shirt with short dowels

S090644607	S	white	1/50	pc
S090644608	M	white	1/50	pc
S090644609	L	white	1/50	pc
S090644610	XL	white	1/50	pc
S090644611	2XL	white	1/50	pc
S090644612	3XL	white	1/50	pc
S090644613	S	gray	1/50	pc
S090644614	M	gray	1/50	pc
S090644615	L	gray	1/50	pc
S090644616	XS	gray	1/50	pc
S090644617	2XL	gray	1/50	pc
S090644618	3XL	gray	1/50	pc
S090644619	S	red	1/50	pc
S090644620	M	red	1/50	pc
S090644621	L	red	1/50	pc
S090644622	XL	red	1/50	pc
S090644623	2XL	red	1/50	pc
S090644624	3XL	red	1/50	pc
S090644625	S	blue	1/50	pc
S090644626	M	blue	1/50	pc
S090644627	L	blue	1/50	pc
S090644628	XL	blue	1/50	pc
S090644629	2XL	blue	1/50	pc
S090644630	3XL	blue	1/50	pc
S090644631	S	navy blue	1/50	pc
S090644632	M	navy blue	1/50	pc
S090644633	L	navy blue	1/50	pc
S090644634	XL	navy blue	1/50	pc
S090644635	2XL	navy blue	1/50	pc
S090644636	3XL	navy blue	1/50	pc
S090644637	S	black	1/50	pc
S090644638	M	black	1/50	pc
S090644639	L	black	1/50	pc
S090644640	XL	black	1/50	pc
S090644641	2XL	black	1/50	pc
S090644642	3XL	black	1/50	pc

Men's T-shirt







Bono Painter
- „natural cotton knit
- single-jersey fabric
- interesting print with raised PUFF effect
- classic short-sleeve cut
- available in 7 color versions

S090691001	S	white	1/50	pc
S090691002	M	white	1/50	pc
S090691003	L	white	1/50	pc
S090691004	XL	white	1/50	pc
S090691005	2XL	white	1/50	pc
S090691006	3XL	white	1/50	pc
S090696019	S	gray	1/50	pc
S090696020	M	gray	1/50	pc
S090696021	L	gray	1/50	pc
S090696022	XL	gray	1/50	pc
S090696023	2XL	gray	1/50	pc
S090696024	3XL	gray	1/50	pc
S090696025	S	black	1/50	pc
S090696026	M	black	1/50	pc
S090696027	L	black	1/50	pc
S090696028	XL	black	1/50	pc
S090696029	2XL	black	1/50	pc
S090696030	3XL	black	1/50	pc

Men's T-shirt







Bono Brus
- natural cotton knit
- single-jersey fabric
- original print
- classic short-sleeve cut
- available in 3 color versions
- perfectly matches trousers from the STALCO and STALCO PERFECT collections

S090696062	S	white	1/50	pc
S090696063	M	white	1/50	pc
S090696064	L	white	1/50	pc
S090696065	XL	white	1/50	pc
S090696066	2XL	white	1/50	pc
S090696067	3XL	white	1/50	pc
S090696069	S	black	1/50	pc
S090696070	M	black	1/50	pc
S090696071	L	black	1/50	pc
S090696072	XL	black	1/50	pc
S090696073	2XL	black	1/50	pc
S090696074	3XL	black	1/50	pc
S090696076	S	gray	1/50	pc
S090696077	M	gray	1/50	pc
S090696078	L	gray	1/50	pc
S090696079	XL	gray	1/50	pc
S090696080	2XL	gray	1/50	pc
S090696081	3XL	gray	1/50	pc

Men's T-shirt









UNI | 100% COTTON | 90% COTTON 10% VISCOSE | 150 g/m²

Bono Stinger
- natural cotton knit
- single-jersey fabric
- original print
- classic short-sleeve cut
- available in 3 color versions
- perfectly matches trousers from the STALCO and STALCO PERFECT collections

S090696031	S	white	1/50	pc
S090696032	M	white	1/50	pc
S090696033	L	white	1/50	pc
S090696034	XL	white	1/50	pc
S090696035	2XL	white	1/50	pc
S090696036	3XL	white	1/50	pc
S090696037	S	gray	1/50	pc
S090696038	M	gray	1/50	pc
S090696039	L	gray	1/50	pc
S090696040	XL	gray	1/50	pc
S090696041	2XL	gray	1/50	pc
S090696042	3XL	gray	1/50	pc
S090696043	S	black	1/50	pc
S090696044	M	black	1/50	pc
S090696045	L	black	1/50	pc
S090696046	XL	black	1/50	pc
S090696047	2XL	black	1/50	pc
S090696048	3XL	black	1/50	pc

Softshell Jacket







UNI | 100% POLYESTER | 290 g/m² | CE Cat. I

Rock
- softshell material
- TPU 5000 mm - protection against wind and rain
- MVP 3000 - breathable membrane
- high stand-up collar
- profiled hood, adjustable with an elastic band
- sleeve finished with an elastic ribbon
- reflective elements
- reverse string zipper
- chin protection strip
- 3 functional pockets with zippers
- waist adjustment with elastic band and stoppers

S090751730	S	gray	1/10	pc
S090751732	M	gray	1/10	pc
S090751734	L	gray	1/10	pc
S090751736	XL	gray	1/10	pc
S090751738	2XL	gray	1/10	pc
S090751740	3XL	gray	1/10	pc
S090751742	4XL	gray	1/10	pc
S090751744	S	navy blue	1/10	pc
S090751746	M	navy blue	1/10	pc
S090751748	L	navy blue	1/10	pc
S090751750	XL	navy blue	1/10	pc
S090751752	2XL	navy blue	1/10	pc
S090751754	3XL	navy blue	1/10	pc
S090751756	4XL	navy blue	1/10	pc

Softshell Jacket



UNI | 96% POLYESTER 4% SPANDEX | 320 g/m² | EN ISO 13688

Phoenix
- made of a specialized, breathable membrane, resistant to wind and rain
- high water resistance index (TPU 800 mm/1000 MVP),
- perfect for difficult weather conditions
- reflective elements
- modern design

S090744011	S	black	1/10	pc
S090744013	M	black	1/10	pc
S090744015	L	black	1/10	pc
S090744017	XL	black	1/10	pc
S090744019	2XL	black	1/10	pc
S090744020	3XL	black	1/10	pc

High-Vis Softshell Jacket







100% POLYESTER | 320 g/m² | CE Cat. II | EN ISO 13688 | EN ISO 20471 | 3

Neon
- 3PW
- made of a specialized, breathable membrane, resistant to wind and rain
- perfect for difficult weather conditions and limited visibility

S090744038	S	yellow	1/10	pc
S090744039	M	yellow	1/10	pc
S090744042	L	yellow	1/10	pc
S090744044	XL	yellow	1/10	pc
S090744046	2XL	yellow	1/10	pc
S090744048	3XL	yellow	1/10	pc
S090700026	4XL	yellow	1/10	pc
S090744041	S	orange	1/10	pc
S090744043	M	orange	1/10	pc
S090744045	L	orange	1/10	pc
S090744047	XL	orange	1/10	pc
S090744049	2XL	orange	1/10	pc
S090744050	3XL	orange	1/10	pc
S090700025	4XL	orange	1/10	pc

Men's Jacket







Artur
- „quilted polyamide jacket
- synthetic down
- thermal insulation
- elastic trims at the hem and cuffs
- stand-up collar
- chin-protection flap
- front YKK reverse zipper
- 2 zippered waist pockets with YKK zippers
- branding options: embroidery and patches
- available in 2 color variants – navy and black"

S090791001	S	black	1/10	pc
S090791002	M	black	1/10	pc
S090791003	L	black	1/10	pc
S090791004	XL	black	1/10	pc
S090791005	2XL	black	1/10	pc
S090791006	3XL	black	1/10	pc
S090791007	4XL	black	1/10	pc
S090791008	S	navy blue	1/10	pc
S090791009	M	navy blue	1/10	pc
S090791010	L	navy blue	1/10	pc
S090791011	XL	navy blue	1/10	pc
S090791012	2XL	navy blue	1/10	pc
S090791013	3XL	navy blue	1/10	pc
S090791014	4XL	navy blue	1/10	pc

Work jacket black







Peter
- Waterproof 600D oxford fabric
- numerous, capacious zippered pockets
- detachable sleeves
- high collar with fleece lining
- detachable hood
- longer back
- headlights
- inner wind belt

S090744153	S	black	1/5	pc
S090744154	M	black	1/5	pc
S090744155	L	black	1/5	pc
S090744156	XL	black	1/5	pc
S090744157	2XL	black	1/5	pc
S090744158	3XL	black	1/5	pc
S090797001	4XL	black	1/5	pc
S090744159	S	navy blue	1/5	pc
S090744160	M	navy blue	1/5	pc
S090744161	L	navy blue	1/5	pc
S090744162	XL	navy blue	1/5	pc
S090744163	2XL	navy blue	1/5	pc
S090744164	3XL	navy blue	1/5	pc
S090797002	4XL	navy blue	1/5	pc

Men's Insulated High-Visibility Jacket







Bomber 3in1
- „300D polyester OXFORD fabric with PU coating
- detachable collar, faux-fur lining, hood, and sleeves
- detachable, foldable hood
- sewn-on reflective elements – 5 cm tapes
- 4 heavy-duty molded zippers
- 4 coil zippers
- chin-protection flap
- storm flap covering the zipper
- 8 multifunctional external pockets
- 2 internal pockets
- ribbed hem and cuffs
- maximum washing cycles: 25

S090700009	S	orange	1/10	pc
S090700010	M	orange	1/10	pc
S090700011	L	orange	1/10	pc
S090700012	XL	orange	1/10	pc
S090700013	2XL	orange	1/10	pc
S090700014	3XL	orange	1/10	pc
S090700015	4XL	orange	1/10	pc
S090700016	5XL	orange	1/10	pc
S090700017	S	yellow	1/10	pc
S090700018	M	yellow	1/10	pc
S090700019	L	yellow	1/10	pc
S090700020	XL	yellow	1/10	pc
S090700021	2XL	yellow	1/10	pc
S090700022	3XL	yellow	1/10	pc
S090700023	4XL	yellow	1/10	pc
S090700024	5XL	yellow	1/10	pc

High-Vis Winter Jacket







Flash
- rain protection
- 3PW
- high-strength fabric – OXFORD 300D
- the length and design of the arms increase the comfort of use
- hood with drawstring hidden in stand-up collar

S090744177	S	yellow	1/10	pc
S090744179	M	yellow	1/10	pc
S090744181	L	yellow	1/10	pc
S090744183	XL	yellow	1/10	pc
S090744185	2XL	yellow	1/10	pc
S090744186	3XL	yellow	1/10	pc
S090744052	S	orange	1/10	pc
S090744054	M	orange	1/10	pc
S090744056	L	orange	1/10	pc
S090744058	XL	orange	1/10	pc
S090744060	2XL	orange	1/10	pc
S090744062	3XL	orange	1/10	pc

High-Vis Winter Jacket 5In1







Flash 5 in 1
- 3PW
- high-strength fabric – OXFORD 300D
- rain protection
- two separate layers and removable dowels allow using up to 5 different variants (e.g. as a light rain jacket, insulated jacket and insulated vest)
- insulated inner jacket

S090744176	S	yellow	1/10	pc
S090744178	M	yellow	1/10	pc
S090744180	L	yellow	1/10	pc
S090744182	XL	yellow	1/10	pc
S090744184	2XL	yellow	1/10	pc
S090744104	3XL	yellow	1/10	pc
S090700003	S	orange	1/10	pc
S090700004	M	orange	1/10	pc
S090700005	L	orange	1/10	pc
S090700006	XL	orange	1/10	pc
S090700007	2XL	orange	1/10	pc
S090700008	3XL	orange	1/10	pc

Rain Jacket



Roxy
- super light
- ventilation system
- drawstring in the hood and the lower circumference
- very practical in storage – can be rolled tightly

S090744565	S	navy blue	1/20	pc
S090744567	M	navy blue	1/20	pc
S090744569	L	navy blue	1/20	pc
S090744571	XL	navy blue	1/20	pc
S090744573	2XL	navy blue	1/20	pc
S090744575	3XL	navy blue	1/20	pc

High-Vis Winter Bomber Jacket 3In1







Pilot Hi-Vis
- 2PW
- body and stand-up collar insulated with fur fastened with a zipper
- quilted insulation in the dowels
- dowels fastened with zippers
- numerous multifunctional pockets

S090744082	S	yellow	1/10	pc
S090744084	M	yellow	1/10	pc
S090744086	L	yellow	1/10	pc
S090744088	XL	yellow	1/10	pc
S090744090	2XL	yellow	1/10	pc
S090744103	3XL	yellow	1/10	pc
S090744083	S	orange	1/10	pc
S090744085	M	orange	1/10	pc
S090744087	L	orange	1/10	pc
S090744089	XL	orange	1/10	pc
S090744091	2XL	orange	1/10	pc
S090744092	3XL	orange	1/10	pc

Winter Vest







Ronin
- practical stand-up collar
- slightly extended back for better protection against cold

S091044021	S	navy blue	1/20	pc
S091044023	M	navy blue	1/20	pc
S091044025	L	navy blue	1/20	pc
S091044027	XL	navy blue	1/20	pc
S091044029	2XL	navy blue	1/20	pc
S091044030	3XL	navy blue	1/20	pc
S091091015	S	gray	1/20	pc
S091091016	M	gray	1/20	pc
S091091017	L	gray	1/20	pc
S091091018	XL	gray	1/20	pc
S091091019	2XL	gray	1/20	pc
S091091020	3XL	gray	1/20	pc

High-Vis Vest





Shine
- 2PW
- extremely light material
- Velcro-fastened

S091042077	S	yellow	1/100	pc
S091042079	M	yellow	1/100	pc
S091042080	L	yellow	1/100	pc
S091042082	XL	yellow	1/100	pc
S091042084	2XL	yellow	1/100	pc
S091042086	3XL	yellow	1/100	pc
S091042085	S	orange	1/100	pc
S091042087	M	orange	1/100	pc
S091042088	L	orange	1/100	pc
S091042090	XL	orange	1/100	pc
S091042092	2XL	orange	1/100	pc
S091042094	3XL	orange	1/100	pc

High-Vis Vest






Summer Shine
- 2PW
- extremely light material
- Velcro-fastened
- mesh structure

S091051228	S	yellow	1/100	pc
S091051230	M	yellow	1/100	pc
S091051232	L	yellow	1/100	pc
S091051234	XL	yellow	1/100	pc
S091051236	2XL	yellow	1/100	pc
S091051238	3XL	yellow	1/100	pc
S091051240	S	orange	1/100	pc
S091051242	M	orange	1/100	pc
S091051244	L	orange	1/100	pc
S091051246	XL	orange	1/100	pc
S091051248	2XL	orange	1/100	pc
S091051250	3XL	orange	1/100	pc

Reflective Harness



Reflekt
- reflective elements significantly improve visibility
- do not restrict movement
- wide adjustment range
- durable buckle
- elastic shoulder strap length: 69–103 cm
- elastic waist strap length: 72–105 cm
- waist strap width: 3.8 cm
- reflective tape width: 1.4 cm

S091571501	one size	yellow	1/100	pc

Work Overall



55 g/m² | Cat. III | EN 13034 | EN 13982-1 | 100% POLYPROPYLENE

SMS
- type 5/6
- loose form, not restricting movement during use

S091247893	M	white	1/50	pc
S091247894	L	white	1/50	pc
S091247895	XL	white	1/50	pc
S091247896	2XL	white	1/50	pc
S091247897	3XL	white	1/50	pc

Thermoactive underwear

UNI | 86% POLYESTER 14% SPANDEX | 220 g/m²



Skyline
- long sleeve shirt
- fitted cut, layered clothing
- thermoactive properties
- round neckline
- flat, elastic, pressure-free seams
- quick-drying

S091351311	XS	black	1/10	pc
S091351310	S	black	1/10	pc
S091351312	M	black	1/10	pc
S091351314	L	black	1/10	pc
S091351316	XL	black	1/10	pc
S091351318	2XL	black	1/10	pc
S091351320	3XL	black	1/10	pc
S091351322	4XL	black	1/10	pc

Work Overall



65 g/m² | Cat. III | EN 13034 | EN 13982-1 | 100% POLYPROPYLENE

Microporus
- type 5/6
- super light
- specialized, laminated non-woven fabric significantly increases the comfort of use
- antistatic finish
- possibility of use in conditions of static electricity risk
- loose form, not restricting movement during use

S091247929	M	white	1/50	pc
S091247930	L	white	1/50	pc
S091247931	XL	white	1/50	pc
S091247932	2XL	white	1/50	pc
S091247933	3XL	white	1/50	pc

Thermoactive underwear

UNI | 86% POLYESTER 14% SPANDEX | 220 g/m²



Skyline
- underpants / men's leggings
- anatomical cut
- thermoactive
- wide, soft elastic waistband
- flat, elastic seams, Autolap technology
- quick-drying

S091351323	XS	black	1/10	pc
S091351324	S	black	1/10	pc
S091351326	M	black	1/10	pc
S091351328	L	black	1/10	pc
S091351330	XL	black	1/10	pc
S091351332	2XL	black	1/10	pc
S091351334	3XL	black	1/10	pc
S091351336	4XL	black	1/10	pc

Knee Pads



Alex
- made of 600D polyester
- flexible pillow that adjusts to the shape of the knee
- double adjustable Velcro fastener and a thick protective layer

S091551609	one size	black	1/20	pc

Knee Pads



Eva
- super light
- made of a mixture of materials with increased flexibility and cushioning

S091544216	one size	black	1/100	pc

Socks



Fresh
- short for extra comfort
- smooth toe seam
- additional ventilation
- flexibly adjust to the foot
- terry cloth finish

S091342002	35-38	gray	3	pack
S091342004	39-41	gray	3	pack
S091342006	42-44	gray	3	pack
S091342008	45-47	gray	3	pack
S091342010	35-38	black	3	pack
S091342012	39-41	black	3	pack
S091342014	42-44	black	3	pack
S091342016	45-47	black	3	pack

Footwear

Safety Footwear



Marcus Low S1
- upper made of suede and mesh
- PU/PU sole
- steel toe cap
- closed heel
- webbing pull tab for easy putting on
- energy absorption in the heel area
- oil-resistant, slip-resistant, and antistatic properties

S092105149	40	-	1/5	pair
S092105150	41	-	1/5	pair
S092105151	42	-	1/5	pair
S092105152	43	-	1/5	pair
S092105153	44	-	1/5	pair
S092105154	45	-	1/5	pair
S092105155	46	-	1/5	pair
S092105156	47	-	1/5	pair
S092105157	48	-	1/5	pair

Safety footwear



Light S1P
- ESD footwear
- toe reinforced with a steel insert
- metal sole protecting against punctures
- made of natural suede leather
- anti-shock system
- inner lining protected with a special anti-abrasion material
- properties: antistatic, anti-slip, oil-resistant
- partially covered with a perfectly ventilating mesh
- reflective elements
- modern design

S092101040	40	-	1/5	pair
S092101041	41	-	1/5	pair
S092101042	42	-	1/5	pair
S092101043	43	-	1/5	pair
S092101044	44	-	1/5	pair
S092101045	45	-	1/5	pair
S092101046	46	-	1/5	pair
S092101047	47	-	1/5	pair
S092101048	48	-	1/5	pair

Safety footwear



S1 FO SR | EN ISO 20345 | Cat. II

Light S1
- toecap reinforced with a steel insert
- anti-shock system
- properties: anti-static, non-slip, oil-resistant
- partially covered with a perfectly ventilating mesh
- reflective elements
- modern design

S092144318	40	-	1/5	pair
S092144320	41	-	1/5	pair
S092144322	42	-	1/5	pair
S092144324	43	-	1/5	pair
S092144326	44	-	1/5	pair
S092144328	45	-	1/5	pair
S092144330	46	-	1/5	pair
S092144332	47	-	1/5	pair
S092144334	48	-	1/5	pair

Work footwear



O1 FO SR | EN ISO 20347 | Cat. II

Service O1
- natural suede leather
- very light
- soft sole
- vents
- inner lining secured with a special material to prevent abrasion
- anti-shock system
- reflective element
- properties: anti-static, non-slip

S092148050	40	-	1/5	pair
S092148051	41	-	1/5	pair
S092148052	42	-	1/5	pair
S092148053	43	-	1/5	pair
S092148054	44	-	1/5	pair
S092148055	45	-	1/5	pair
S092148056	46	-	1/5	pair
S092148057	47	-	1/5	pair
S092148058	48	-	1/5	pair

Work footwear



O1 FO SR | EN ISO 20347 | Cat. II

Light O1
- flexible sole
- anti-shock system
- properties: anti-static, non-slip, oil-resistant
- partially covered with a perfectly ventilating mesh
- reflective elements
- modern design
- low price – high quality

S092148024	40	-	1/5	pair
S092148025	41	-	1/5	pair
S092148026	42	-	1/5	pair
S092148027	43	-	1/5	pair
S092148028	44	-	1/5	pair
S092148029	45	-	1/5	pair
S092148030	46	-	1/5	pair
S092148031	47	-	1/5	pair
S092148032	48	-	1/5	pair

Safety footwear



S1 FO SR | EN ISO 20345 | Cat. II

Service S1
- suede outer layer
- toecap reinforced with a steel insert
- vents
- anti-shock system
- properties: anti-static, non-slip, oil-resistant

S092147948	36	-	1/5	pair
S092147950	37	-	1/5	pair
S092147952	38	-	1/5	pair
S092147954	39	-	1/5	pair
S092147956	40	-	1/5	pair
S092147958	41	-	1/5	pair
S092147960	42	-	1/5	pair
S092147962	43	-	1/5	pair
S092147964	44	-	1/5	pair
S092147966	45	-	1/5	pair
S092147968	46	-	1/5	pair
S092147970	47	-	1/5	pair
S092147972	48	-	1/5	pair

Safety footwear





Service Sandal S1
- natural suede leather
- very light
- soft sole
- toecap reinforced with a steel insert
- inner lining secured with a special material to prevent abrasion
- Velcro-fastened
- vents
- anti-shock system
- reflective element
- properties: anti-static, non-slip, oil-resistant

S092348059	36	-	1/5	pair
S092348060	37	-	1/5	pair
S092348061	38	-	1/5	pair
S092348062	39	-	1/5	pair
S092348063	40	-	1/5	pair
S092348064	41	-	1/5	pair
S092348065	42	-	1/5	pair
S092348066	43	-	1/5	pair
S092348067	44	-	1/5	pair
S092348068	45	-	1/5	pair
S092348069	46	-	1/5	pair
S092348070	47	-	1/5	pair
S092348071	48	-	1/5	pair

Work footwear





Joker O1
- very light
- soft sole
- inner lining secured with a special material to prevent abrasion
- Velcro-fastened
- vents
- anti-shock system
- properties: anti-static, non-slip, oil-resistant
- reflective element

S092351578	36	-	1/5	pair
S092351580	37	-	1/5	pair
S092351582	38	-	1/5	pair
S092351584	39	-	1/5	pair
S092351586	40	-	1/5	pair
S092351588	41	-	1/5	pair
S092351590	42	-	1/5	pair
S092351592	43	-	1/5	pair
S092351594	44	-	1/5	pair
S092351596	45	-	1/5	pair
S092351598	46	-	1/5	pair
S092351600	47	-	1/5	pair
S092351602	48	-	1/5	pair

Safety footwear





Joker S1
- very light
- soft sole
- toecap reinforced with a steel insert
- inner lining secured with a special material to prevent abrasion
- Velcro-fastened
- vents
- anti-shock system
- Properties: anti-static, non-slip, oil-resistant, reflective element

S092351552	36	-	1/5	pair
S092351554	37	-	1/5	pair
S092351556	38	-	1/5	pair
S092351558	39	-	1/5	pair
S092351560	40	-	1/5	pair
S092351562	41	-	1/5	pair
S092351564	42	-	1/5	pair
S092351566	43	-	1/5	pair
S092351568	44	-	1/5	pair
S092351570	45	-	1/5	pair
S092351572	46	-	1/5	pair
S092351574	47	-	1/5	pair
S092351576	48	-	1/5	pair

Safety footwear





Tomas SB
- made of breathable material
- toecap reinforced with a steel insert
- anti-shock system
- properties: anti-static, non-slip, oil-resistant

S092151500	36	-	1/5	pair
S092151502	37	-	1/5	pair
S092151504	38	-	1/5	pair
S092151506	39	-	1/5	pair
S092151508	40	-	1/5	pair
S092151510	41	-	1/5	pair
S092151512	42	-	1/5	pair
S092151514	43	-	1/5	pair
S092151516	44	-	1/5	pair
S092151518	45	-	1/5	pair
S092151520	46	-	1/5	pair
S092151522	47	-	1/5	pair
S092151524	48	-	1/5	pair

Work footwear



UNI · CE Cat. II · OB SRA · EN ISO 20347

Tomas OB
- very light
- made of breathable material
- very soft and flexible sole
- anti-lock braking system
- properties: anti-static, anti-slip and oil resistant
- soft lining
- inner lining protected by a special material to prevent abrasion

S092151474	36	-	1/5	pair
S092151476	37	-	1/5	pair
S092151478	38	-	1/5	pair
S092151480	39	-	1/5	pair
S092151482	40	-	1/5	pair
S092151484	41	-	1/5	pair
S092151486	42	-	1/5	pair
S092151488	43	-	1/5	pair
S092151490	44	-	1/5	pair
S092151492	45	-	1/5	pair
S092151494	46	-	1/5	pair
S092151496	47	-	1/5	pair
S092151498	48	-	1/5	pair

Safety footwear



UNI · CE Cat. II · S1 FO SR · EN ISO 20345

Thuro Low S1
- high toecap reinforced with a steel insert
- soft lining
- anti-shock system
- properties: anti-static, non-slip, oil-resistant

S092144290	36	-	1/5	pair
S092144292	37	-	1/5	pair
S092144294	38	-	1/5	pair
S092144296	39	-	1/5	pair
S092144298	40	-	1/5	pair
S092144299	41	-	1/5	pair
S092144301	42	-	1/5	pair
S092144303	43	-	1/5	pair
S092144305	44	-	1/5	pair
S092144307	45	-	1/5	pair
S092144309	46	-	1/5	pair
S092144304	47	-	1/5	pair
S092144306	48	-	1/5	pair

Safety footwear



CE Cat. II · S3 FO SR · EN ISO 20345

Technic Low S3
- high toecap reinforced with a steel insert
- anti-shock system
- anti-puncture sole
- properties: waterproof, anti-static, non-slip, oil-proof

S092151531	40	-	1/10	pair
S092151533	41	-	1/10	pair
S092151535	42	-	1/10	pair
S092151537	43	-	1/10	pair
S092151539	44	-	1/10	pair
S092151541	45	-	1/10	pair
S092151543	46	-	1/10	pair
S092151545	47	-	1/10	pair

Safety Footwear



CE Cat. II · S1 FO SR · EN ISO 20345

Marcus High S1
- upper made of suede and mesh
- PU/PU sole
- steel toe cap
- closed heel
- webbing pull tab for easy putting on
- energy absorption in the heel area
- oil-resistant, slip-resistant, and antistatic properties

S092211249	40	-	1/5	pair
S092211250	41	-	1/5	pair
S092211251	42	-	1/5	pair
S092211252	43	-	1/5	pair
S092211253	44	-	1/5	pair
S092211254	45	-	1/5	pair
S092211255	46	-	1/5	pair
S092211256	47	-	1/5	pair
S092211257	48	-	1/5	pair

Safety Footwear





Welder S3L
- upper made of embossed leather
- PU flap protecting against sparks and spatter
- multi-layer soft Sandwich-type lining
- PU/rubber sole
- composite toe cap
- Kevlar insole
- Hi-Poly foam + mesh comfort insole
- energy absorption in the heel area
- resistance to contact heat
- heat insulation of the outsole
- quick-release buckle
- oil-resistant, slip-resistant, and antistatic properties

S092211258	40	-	1/10	pair
S092211259	41	-	1/10	pair
S092211260	42	-	1/10	pair
S092211261	43	-	1/10	pair
S092211262	44	-	1/10	pair
S092211263	45	-	1/10	pair
S092211264	46	-	1/10	pair
S092211265	47	-	1/10	pair
S092211266	48	-	1/10	pair

Safety footwear





Thuro High S1 W
- anti-shock system
- reflective elements
- anti-static and anti-slip properties, oil-resistant
- toecap reinforced with a steel insert
- insulated
- cow split leather
- cast toe tip prevents abrasion
- inner lining secured with a special material to prevent abrasion

S092244340	40	-	1/5	pair
S092244341	41	-	1/5	pair
S092244342	42	-	1/5	pair
S092244343	43	-	1/5	pair
S092244344	44	-	1/5	pair
S092244345	45	-	1/5	pair
S092244346	46	-	1/5	pair
S092244347	47	-	1/5	pair
S092244348	48	-	1/5	pair

Safety footwear






Thuro High S1
- high toecap reinforced with a steel insert
- soft lining
- anti-shock system
- properties: anti-static, non-slip, oil-resistant

S092244271	40	-	1/5	pair
S092244273	41	-	1/5	pair
S092244275	42	-	1/5	pair
S092244277	43	-	1/5	pair
S092244279	44	-	1/5	pair
S092244281	45	-	1/5	pair
S092244283	46	-	1/5	pair
S092244284	47	-	1/5	pair
S092244286	48	-	1/5	pair

Safety footwear





Thuro High S3
- high toecap reinforced with a steel insert
- soft lining
- anti-shock system
- anti-puncture sole
- properties: anti-static, non-slip, oil-resistant

S092244285	40	-	1/5	pair
S092244287	41	-	1/5	pair
S092244289	42	-	1/5	pair
S092244291	43	-	1/5	pair
S092244293	44	-	1/5	pair
S092244295	45	-	1/5	pair
S092244297	46	-	1/5	pair
S092244321	47	-	1/5	pair
S092244323	48	-	1/5	pair

Safety footwear



S3 FO SR | EN ISO 20345

Technic High S3
- high toecap reinforced with a steel insert
- anti-shock system
- anti-puncture sole
- properties: waterproof, anti-static, non-slip, oil-proof

S092247852	38	-	1/10	pair
S092247853	39	-	1/10	pair
S092247900	40	-	1/10	pair
S092247901	41	-	1/10	pair
S092247903	42	-	1/10	pair
S092247905	43	-	1/10	pair
S092247907	44	-	1/10	pair
S092247909	45	-	1/10	pair
S092247911	46	-	1/10	pair
S092247912	47	-	1/10	pair

Safety footwear



S3L FO SR | EN ISO 20345

Syberian S3
- high toecap reinforced with a steel insert
- warming
- anti-shock system
- anti-puncture sole
- properties: waterproof, anti-static, non-slip, oil-proof

S092244310	40	-	1/10	pc
S092244311	41	-	1/10	pc
S092244312	42	-	1/10	pc
S092244313	43	-	1/10	pc
S092244314	44	-	1/10	pc
S092244315	45	-	1/10	pc
S092244316	46	-	1/10	pc
S092244317	47	-	1/10	pc
S092244319	48	-	1/10	pc

Work footwear



O1 FO SR | EN ISO 20347

Hanso O1
- double-layer sole – hard on the outside and flexible on the inside
- anti-shock system
- properties: anti-static, non-slip, oil-resistant

S092247913	40	-	1/5	pair
S092247915	41	-	1/5	pair
S092247917	42	-	1/5	pair
S092247919	43	-	1/5	pair
S092247920	44	-	1/5	pair
S092247921	45	-	1/5	pair
S092247922	46	-	1/5	pair
S092247923	47	-	1/5	pair
S092247918	48	-	1/5	pair

Snow boots



Snower
- lightweight upper made of suede-like material
- sole made of high-quality TPR
- color scheme designed in line with the latest trends
- insulated upper interior and insole

S092209040	40	-	1/5	pair
S092209041	41	-	1/5	pair
S092209042	42	-	1/5	pair
S092209043	43	-	1/5	pair
S092209044	44	-	1/5	pair
S092209045	45	-	1/5	pair
S092209046	46	-	1/5	pair

Snow Boots



Grizzly
- super light and super warm
- waterproof
- high uppers prevent snow from getting inside
- removable shoe warmer facilitates maintenance and enables use also on warmer days
- high abrasion resistance
- non-slip sole
- irreplaceable in snow and frost

S092248013	40	-	1/10	pair
S092248014	41	-	1/10	pair
S092248015	42	-	1/10	pair
S092248016	43	-	1/10	pair
S092248017	44	-	1/10	pair
S092248018	45	-	1/10	pair
S092248019	46	-	1/10	pair

Insulated Rubber Boots



Garden
- super light
- waterproof
- made of material with increased flexibility, cushioning and resistance to external conditions
- removable warmer

S092547947	36	-	1/7	pair
S092547949	37	-	1/7	pair
S092547951	38	-	1/7	pair
S092547953	39	-	1/7	pair
S092547955	40	-	1/7	pair
S092547957	41	-	1/7	pair
S092547959	42	-	1/6	pair
S092547961	43	-	1/6	pair
S092547963	44	-	1/6	pair
S092547965	45	-	1/6	pair
S092547967	46	-	1/6	pair
S092547969	47	-	1/6	pair
S092547971	48	-	1/6	pair

Rubber Clogs



Clog
- super light
- waterproof
- made of material with increased flexibility, cushioning and resistance to external conditions

S092447935	36	-	1/15	pair
S092447936	37	-	1/15	pair
S092447937	38	-	1/15	pair
S092447938	39	-	1/15	pair
S092447939	40	-	1/15	pair
S092447940	41	-	1/12	pair
S092447941	42	-	1/12	pair
S092447942	43	-	1/12	pair
S092447943	44	-	1/12	pair
S092447944	45	-	1/12	pair
S092447945	46	-	1/12	pair

Men's rubber shoe



Nixon
- made of PVC
- embossed sole prevents slipping
- provide comfort
- they are very flexible
- easy to clean

S092547982	40	-	1/6	pair
S092547984	41	-	1/6	pair
S092547986	42	-	1/6	pair
S092547988	43	-	1/6	pair
S092547990	44	-	1/6	pair
S092547992	45	-	1/6	pair
S092547994	46	-	1/6	pair

Work footwear



Filcak
- waterproof
- made of PVC material modified with rubber
- felt insulation inside the shoes

S092547973	40	-	1/6	pair
S092547975	41	-	1/6	pair
S092547977	42	-	1/6	pair
S092547979	43	-	1/6	pair
S092547981	44	-	1/6	pair
S092547983	45	-	1/6	pair
S092547985	46	-	1/6	pair

Insoles for shoes



Hermes
- made of flexible, soft sponge
- alleviate the pressure of the foot on the ground
- adapts to the shape of the foot
- provide maximum comfort

S092651612	36	-	1/100	pc
S092651614	37	-	1/100	pc
S092651616	38	-	1/100	pc
S092651618	39	-	1/100	pc
S092651620	40	-	1/100	pc
S092651622	41	-	1/100	pc
S092651624	42	-	1/100	pc
S092651626	43	-	1/100	pc
S092651628	44	-	1/100	pc
S092651630	45	-	1/100	pc
S092651632	46	-	1/100	pc
S092651634	47	-	1/100	pc
S092651636	48	-	1/100	pc

Gloves

Safety Gloves



S-Wampir
- latex coating
- 7g weave
- breathing

S093247341	one size	-	10/600	pair

Safety Gloves



S-Latex B ECO
- latex coating
- 13g weave
- resistant to abrasion

S093247115	6	-	12/120	pair
S093247117	7	-	12/120	pair
S093247119	8	-	12/120	pair
S093247121	9	-	12/120	pair
S093247123	10	-	12/120	pair
S093247125	11	-	12/120	pair

Safety Gloves



S-Latex B
- latex coating
- 13g weave
- resistant to abrasion

S093247348	7	-	12/240	pair
S093247346	8	-	12/240	pair
S093247347	9	-	12/240	pair
S093247349	10	-	12/240	pair

Safety Gloves



S-Latex R-ECO
- latex
- 13g weave
- resistant to abrasion

S093247277	6	-	12/120	pair
S093247279	7	-	12/120	pair
S093247280	8	-	12/120	pair
S093247282	9	-	12/120	pair
S093247284	10	-	12/120	pair
S093247283	11	-	12/120	pair

Safety Gloves



S-Poli W Eco
- polyurethane coating
- 13g weave
- ultra light

S093247402	6	-	12/120	pair
S093247412	7	-	12/120	pair
S093247413	8	-	12/120	pair
S093247414	9	-	12/120	pair
S093247415	10	-	12/120	pair
S093247406	11	-	12/120	pair

Safety Gloves



S-Latex R
- latex coating
- 13g weave
- resistant to abrasion

S093247339	6	-	12/240	pair
S093247342	7	-	12/240	pair
S093247344	8	-	12/240	pair
S093247343	9	-	12/240	pair
S093247345	10	-	12/240	pair
S093247340	11	-	12/240	pair

Safety Gloves



S-Poli B
- polyurethane coating
- 13g weave
- ultra light

S093247377	9	-	12/240	pair
S093247379	10	-	12/240	pair

Safety Gloves



S-Poli W
- polyurethane coating
- 13g weave
- ultra light

S093247374	7	-	12/240	pair
S093247376	8	-	12/240	pair
S093247373	9	-	12/240	pair
S093247375	10	-	12/240	pair

Safety Gloves



S-Poli B Eco
- polyurethane coating
- 13g weave
- ultra light

S093247408	6	-	12/120	pair
S093247409	7	-	12/120	pair
S093247410	8	-	12/120	pair
S093247417	9	-	12/120	pair
S093247418	10	-	12/120	pair
S093247421	11	-	12/120	pair

Safety Gloves



S-Heavy Grip-ECO
- latex
- 10g weave
- tear-resistant

S093247365	10	-	12/120	pair

Safety Gloves



S-Eco Drag
- latex
- 10g weave
- breathing
- resistant to abrasion

S093247351	9	-	12/120	pair
S093247353	10	-	12/120	pair
S093247350	11	-	12/120	pair

Safety Gloves



S-Garden
- breathing
- flexible
- ultralight
- high precision of movement

S093247381	7	-	12/240	pair
S093247383	8	-	12/240	pair

Safety Gloves



S-Medium DRAG
- latex coating
- 10g weave
- breathing

S093247399	9	-	12/120	pair
S093247401	10	-	12/120	pair
S093247403	11	-	12/120	pair

Safety Gloves



Kid's
- latex coating
- fluorescent
- soft and comfortable
- stretchable
- perfectly fitted to the hand
- abrasion and tear resistance
- breathable

S093247293	3	-	12/240	pair
S093247294	4	-	12/240	pair
S093247296	5	-	12/240	pair

Safety Gloves



Latex Foam S
- latex coating
- flexible
- precision of movement

S093248033	8	-	12/240	pair
S093248034	9	-	12/240	pair
S093248035	10	-	12/240	pair

Safety Gloves



S-Nitri
- nitrile coating
- 13g weave

S093247360	7	-	12/240	pair
S093247355	8	-	12/240	pair
S093247357	9	-	12/240	pair
S093247359	10	-	12/240	pair

Safety Gloves



S-Light N
- nitrile coating
- 10g weave
- oil-resistant

S093247361	8	-	12/240	pair
S093247362	9	-	12/240	pair
S093247363	10	-	12/240	pair

Safety Gloves



S-Heavy N
- nitrile coating
- 7g weave
- oil-resistant

S093247367	10	-	12/120	pair

Safety Gloves



S-ECO Therm Grip
- latex
- 7g weave
- insulated glove
- resistant to abrasion

S093247426	9	-	12/120	pair
S093247427	10	-	12/120	pair
S093247429	11	-	12/120	pair

Safety Gloves



S-Therm Grip
- latex
- 10g weave
- insulated glove
- resistant to abrasion

S093247369	9	-	12/120	pair
S093247371	10	-	12/120	pair

Protective Gloves



Poli ESD
- electrostatic discharge dissipation
- polyester yarn with carbon fiber
- elastic and antistatic
- PU coating on the palm
- seamless construction
- resistant to wear and abrasion
- breathable
- lint-free
- ideal for work in ESD-controlled environments
- wrist cuff

S093261001	6	-	12/120	pair
S093261002	7	-	12/120	pair
S093261003	8	-	12/120	pair
S093261004	9	-	12/120	pair
S093261005	10	-	12/120	pair
S093261006	11	-	12/120	pair

Protective Gloves



Poli F ESD
- electrostatic discharge dissipation
- polyester yarn with carbon fiber
- elastic and antistatic
- PU coating on the fingers
- seamless construction
- resistant to wear and abrasion
- breathable
- lint-free
- ideal for work in ESD-controlled environments
- wrist cuff

S093261011	6	-	12/120	pair
S093261012	7	-	12/120	pair
S093261013	8	-	12/120	pair
S093261014	9	-	12/120	pair
S093261015	10	-	12/120	pair
S093261016	11	-	12/120	pair

Safety Gloves



S-Skin Soft G
- natural leather
- breathing
- firm grip

S093347313	8	-	6/120	pair
S093347315	9	-	6/120	pair
S093347317	10	-	6/120	pair
S093347319	11	-	6/120	pair

Safety Gloves



S-Skin Soft B
- natural leather
- Velcro
- breathing
- firm grip

S093347301	7	-	6/120	pair
S093347303	8	-	6/120	pair
S093347305	9	-	6/120	pair
S093347307	10	-	6/120	pair
S093347309	11	-	6/120	pair

Safety Gloves



S-Skin Soft H
- natural leather
- firm grip

S093347802	8	-	6/120	pair
S093347803	9	-	6/120	pair
S093347804	10	-	6/120	pair
S093347806	11	-	6/120	pair

Safety Gloves



S-Skin Hard W
- natural leather
- tear-resistant

S093347286	9	-	6/120	pair
S093347288	10	-	6/120	pair
S093347290	11	-	6/120	pair

Safety Gloves



S-Skin W
- natural leather
- tear-resistant

S093347333	10	-	12/120	pair

Safety Gloves



S-Skin Strong
- natural leather
- tear-resistant

S093347335	10	-	12/120	pair

Protective Gloves



S-Skin Weld
- designed for welders
- full-grain goatskin
- cuff made of split cowhide
- KEVLAR stitching
- unlined
- precision handling
- double stitching on the index finger
- protection against contact heat and mechanical hazards

S093357330	8	-	1/120	pair
S093357331	9	-	1/120	pair
S093357332	10	-	1/120	pair
S093357333	11	-	1/120	pair

Safety Gloves



S-Skin Hard
- natural leather
- tear-resistant

S093347337	10	-	12/120	pair

Safety Gloves



Parker
- protection against cold and moisture
- outer part made of synthetic leather
- inner part made of polyurethane material impermeable to liquids and moisture
- HI-VIS material improving visibility

S093447391	8	-	6/120	pair
S093447392	9	-	6/120	pair
S093447393	10	-	6/120	pair
S093447394	11	-	6/120	pair

Safety Gloves



S-Skin Red
- natural leather
- tear-resistant

S093347329	11	-	12/60	pair

Safety Gloves



Yeti
- protection against cold and moisture
- outer part made of synthetic leather
- inner part made of polyurethane material impermeable to liquids and moisture
- soft and flexible Velcro

S093447135	8	-	6/120	pair
S093447136	9	-	6/120	pair
S093447137	10	-	6/120	pair
S093447138	11	-	6/120	pair

Head and face protection

Balaclava 3W1



Pepper 3 in 1
- made of thermal fiber
- multifunctional balaclava – can be used as a hat, mask and scarf
- ideal for everyday use as well

S091442051	one size	black	1/200	pc

Winter Hat



Cork
- waterproof outer fabric
- insulated with fur
- practical earpieces fastened under the chin

S091442049	one size	black	1/100	pc

Winter Hat



Olo
- solid, densely knitted yarn
- double material
- black, perfect for logo embroidery
- packaging - bag and hook
- universal size 54-62

S091442056	one size	black	1/50	pc
S091442068	one size	khaki	1/50	pc

Winter hat with a flashlight



Ray
- LED flashlight
- 4 lighting modes: 100%, 75%, 50% and pulsating
- brightness 120 lm
- USB charging
- double-layer
- logging: embroidery and patches

S091442050	one size	black	1/50	pc
S091479002	one size	gray	1/50	pc

Winter Hat with LED Light



2Rays
- hat with 2 lights:
- – front (white light)
- – rear (red light)
- LED lights with 4 modes: 100%, 75%, 50%, and flashing
- brightness: 120 lm
- USB 2.0 charging
- battery capacity: 250 mAh
- one-size-fits-all: 54–62
- black color, 100% acrylic

S091491038	one size	black	1/50	pc

Winter Hat with LED Light







Ray Fluo
- high-visibility reflective hat with LED light
- available in 2 colors – neon yellow and neon orange
- thick 2 cm reflective band
- LED light with 4 modes: 100%, 75%, 50%, and flashing
- brightness: 120 lm
- USB 2.0 charging
- battery capacity: 250 mAh
- one-size-fits-all: 54–62

S091491036	one size	orange	1/50	pc
S091491037	one size	yellow	1/50	pc

Winter Hat with LED Light



Ray Kids
- for smaller heads, including children – size 46–52
- LED light with 4 modes: 100%, 75%, 50%, and flashing
- brightness: 120 lm
- USB 2.0 charging
- battery capacity: 250 mAh

S091491035	one size	black	1/50	pc

High visibility cap







Fluo
- reflective
- thick, densely knitted hat
- double material
- very flexible
- thick, 2 cm reflective strip

S091442052	one size	yellow	1/50	pc
S091442054	one size	orange	1/50	pc

Reflective Cap







Pick
- classic design with reinforced visor
- reflective elements
- ventilation holes
- hook-and-loop circumference adjustment

S091444224	one size	yellow	1/100	pc
S091444226	one size	orange	1/100	pc

Cap















Carol
- classic design with a stiffened cap
- vents
- circumference adjustment

S091444221	one size	navy blue	1/25	pc
S091444223	one size	black	1/25	pc
S091444225	one size	gray	1/25	pc
S091444227	one size	white	1/25	pc
S091444229	one size	red	1/25	pc
S091444231	one size	green	1/25	pc

Industrial Helmet















Helius
- 4-point harness ensures a stable position of the helmet even with a tilted silhouette
- vents
- water drainage gutter
- suitable for use in temperature range from -20°C to +50°C
- to be combined with the STALCO Neck chin strap

S095142059	one size	yellow	1/20	pc
S095142061	one size	orange	1/20	pc
S095142063	one size	green	1/20	pc
S095142065	one size	white	1/20	pc
S095142067	one size	blue	1/20	pc
S095142069	one size	red	1/20	pc

Chin Strap



Neck
- length adjustment
- convenient hooks for quick detachment
- designed for the Helius safety helmet from the STALCO line

S095242058	one size	-	1/24	pc

Respiratory protection

Dust Mask



Fergus
- designed to protect the respiratory tract in dusty places
- valve adjusting temperature and humidity under the hood
- P1

S094247235	one size	-	1/50	pc

Filtering Half Mask with Valve



Flix
- protection class FFP2
- exhalation valve
- adjustable straps
- aluminium nose clip
- high dust absorption
- soft PP foam nose pad
- made of polypropylene and polyester
- foldable design
- excellent facial fit
- applications: chemical, pharmaceutical, electronics and construction industries
- individually packed, 10 pcs per box

S094247236	one size	-	10/200	pc

Filtering Half Mask with Valve



Core
- protection class FFP2
- exhalation valve
- adjustable straps
- aluminium nose clip
- soft PP foam nose pad
- made of polypropylene and polyester
- excellent facial fit
- applications: chemical, pharmaceutical, electronics and construction industries
- individually packed, 10 pcs per box

S094247237	one size	-	10/200	pc

Filtering Half Mask with Valve



Aro
- protection class FFP2
- exhalation valve made of PP + synthetic rubber membrane
- adjustable straps
- aluminium nose clip
- PU foam nose seal
- soft PP foam nose pad
- made of polypropylene and polyester
- foldable design
- excellent facial fit
- individually packed, 10 pcs per box

S094247238	one size	-	10/200	pc

Eye protection

Safety Glasses



Bravo
- AF (Anti-Fog) coating
- HC coating for increased scratch resistance
- clear lenses
- UV380 filter
- impact resistance (1FT, F – 45 m/s)
- universal size
- comfortable to wear

S096144212	one size	-	1/10/100	pc

Safety Glasses



Bravo Smoke
- AF (Anti-Fog) coating
- HC coating for increased scratch resistance
- dark-tinted lenses
- UV380 filter
- impact resistance (1FT, F – 45 m/s)
- universal size
- comfortable to wear

S096144214	one size	-	1/10/100	pc

Safety Glasses



Vipper
- UV385 filter
- Anti-Fog coating
- scratch-resistant
- universal size
- impact resistance at extreme temperatures FT

S096144218	one size	-	1/10/100	pc

Safety Glasses



Speed
- impact resistance F
- optical class 1

S096144220	one size	-	1/10/100	pc

Safety Glasses



Duck
- super light
- clear plastic lens, provides protection against fast moving low-energy particles

S096144199	one size	-	1/300	pc

Safety Glasses



Parrot White
- super light
- formula protecting against fast-moving, low-energy particles

S096144201	one size	-	1/300	pc

Safety Glasses

UNI · CE Cat. II · EN 166 · EN 172



Parrot Smoke
- super light
- tinted lenses
- formula protecting against fast-moving, low-energy particles

S096144203	one size	-	1/300	pc

Safety Glasses

CE Cat. II · EN 166 · EN 170



Dunlin
- lenses providing excellent visibility – optical class 1 and protection level (F)
- robust temples with adjustable length and angle
- fastening strap holes

S096144211	one size	-	1/300	pc

Safety Glasses

UNI · CE Cat. II · EN 166 · EN 170



Parrot Yellow
- super light
- yellow lenses
- formula protecting against fast-moving, low-energy particles

S096144210	one size	-	1/300	pc

Safety Glasses

UNI · CE Cat. II · EN 166 · EN 170



Booby
- wide, transparent temples also protect from the side, without limiting the viewing angle

S096147265	one size	-	1/200	pc

Safety Glasses

UNI · CE Cat. II · EN 166 · EN 170



Greeny
- super light
- clear plastic lens, provides protection against fast moving low-energy particles, flexible material

S096144205	one size	-	1/300	pc

Safety Goggles

UNI · CE Cat. II · EN 166



Comor
- side vents to prevent fogging
- flexible fastening strap with adjustable circumference

S096147255	one size	-	1/144	pc

Safety Glasses



Spark
- super light
- clear plastic lens, provides protection against fast moving low-energy particles, vents prevent fogging

S096144219	one size	-	1/200	pc

Face Shield



Horizon
- impact resistance C
- mesh construction
- durable PP frame
- universal size
- lightweight construction
- adjustable headband with knob
- adjustable tilt angle
- additional foam padding on the headband

S095348143	one size	-	1/10/40	pc

Face Shield



Spartan
- polycarbonate glass
- patented system for adjusting the head circumference, the depth of the seat and the distance between the glass and the face
- first optical class
- resistance to medium-energy impacts

S096248041	one size	-	1/10	pc

Welding Shield



Loft
- pressboard with added latex extends the durability of the shield and gives increased resistance to weather conditions
- special body profiling for better protection of the eyes and the entire head
- perfect balance has a positive effect on the ergonomics of the welder's work

S096248040	one size	-	1/30	pc

Face Shield



Univer
- impact resistance F
- steel mesh
- universal size
- elastic strap
- adjustment wheel (POM)
- lightweight construction
- durable PP frame
- ideal for gardeners and trimmers

S095348142	one size	-	1/10/40	pc

Hearing protection

Protective Earmuffs



Nobo
- large, comfortable cups with soft cushions
- allows size adjustment
- SNR soundproofing: 27.6 dB
- ideal protection during work with medium noise levels

S097144213	L	-	1/60	pc

Protective Earmuffs



Veron
- large, comfortable cups with soft cushions
- additional bumper on the headband connecting the cups
- allows size adjustment
- SNR soundproofing: 27.5 dB
- ideal protection during work with medium noise levels

S097144215	L	-	1/60	pc

Protective Earmuffs



Nellore
- noise-reduction earmuffs, muffle sounds to protect against medium or high noise levels
- SNR soundproofing: 32.1 dB
- leather imitation
- has a foldable, adjustable hoop
- pocket model

S097144217	one size	-	1/60	pc

Ear Protectors / Ear Muffs



Arion
- noise reduction SNR 29 dB
- ergonomic shape
- lightweight construction
- adjustable headband
- soft cushions
- durable protective cups

S097144222	one size	-	1/20	pc

Stoppers



Plug
- soundproofing :SNR: 34dB, H: 33dB, M:32dB, L:29dB
- hearing protection against excessive noise, perfect filtering of sound at high frequencies
- made of slowly expanding, soft and flexible polyurethane foam
- perfect fit in the ear canal thanks to the self-shaping material
- even distribution of pressure on the ear canal guaranteeing high comfort of use

S097251343	one size	-	1/4000	pc



STALCO
PERFECT

OCCUPATIONAL
SAFETY AND HEALTH

Clothing

Work Trousers



65% POLYESTER 33% COTTON 2% SPANDEX | 250 g/m² | CE Cat. I | EN ISO 13688

Flex Line
- made of durable and airy RipStop material to prevent tearing, reinforcements and pockets made of increased-durability CORDURA fabric
- Knee pad pockets closed at the top with Velcro flaps
- flexible belt in the STRETCH BELT system, 3M tapes, YKK zippers, triple seams

S090179045	S	gray	1/10	pc
S090179046	M	gray	1/10	pc
S090179048	L	gray	1/10	pc
S090179049	XL	gray	1/10	pc
S090179050	2XL	gray	1/10	pc
S090179051	3XL	gray	1/10	pc

Work pants







92% NYLON 8% SPANDEX | CE Cat. I | EN ISO 13688 | 250 g/m²

Stretch Line
- Cordura inserts
- ventilation, 3D mesh
- 3M Scotchlite reflectors
- Wide, lockable belt loops
- triple stitching
- multifunctional bellows pocket
- pockets for foam pads
- Leg can be extended by 4 cm
- All YKK zippers
- active belt

S090179260	XS	black	1/10	pc
S090179261	S	black	1/10	pc
S090179263	M	black	1/10	pc
S090179267	L	black	1/10	pc
S090179269	XL	black	1/10	pc
S090179271	2XL	black	1/10	pc
S090179273	3XL	black	1/10	pc
S090179293	XS	olive	1/10	pc
S090179294	S	olive	1/10	pc
S090179296	M	olive	1/10	pc
S090179300	L	olive	1/10	pc
S090179302	XL	olive	1/10	pc
S090179304	2XL	olive	1/10	pc
S090179306	3XL	olive	1/10	pc

Work Trousers



64% POLYESTER 34% COTTON 2% SPANDEX | 280 g/m² | CE Cat. I | EN ISO 13688

Heavy Line
- many high-strength fabric reinforcements CORDURA
- triple seams
- top-class YKK metal zipper
- specially developed structure with a wedge significantly increases the comfort of use
- mesh ventilation opens/closes with a zipper
- additional bolts securing the places most prone to tearing
- additional fitter's pockets attached to the belt with a zipper
- flexible belt
- reflective elements
- modern design

S090178556	S	gray	1/10	pc
S090178558	M	gray	1/10	pc
S090178562	L	gray	1/10	pc
S090178564	XL	gray	1/10	pc
S090178566	2XL	gray	1/10	pc
S090178554	3XL	gray	1/10	pc

Work Trousers



58% COTTON 37% POLYESTER 5% SPANDEX | 270 g/m² | CE Cat. I | EN ISO 13688

Moro X
- fabric reinforced with flexible spandex ensures high comfort of use
- many high-strength fabric reinforcements CORDURA
- triple seams
- specially developed structure with a wedge significantly increases the comfort of use
- the pants can be transformed into board shorts (removable lower legs)
- 3M reflective elements, YKK zippers, modern design

S090178911	S	gray	1/10	pc
S090178913	M	gray	1/10	pc
S090178915	L	gray	1/10	pc
S090178917	XL	gray	1/10	pc
S090178919	2XL	gray	1/10	pc
S090178920	3XL	gray	1/10	pc

Work Trousers



65% POLYESTER 32% COTTON 3% SPANDEX | 280 g/m² | CE Cat. I | EN ISO 13688

Canvas

- made of high-quality CANVAS polycotton
- extremely durable fabric weave with increased strength and resistance to abrasion, tearing, etc.
- triple seams
- coated with waterproof Teflon
- additional bolts securing places extremely susceptible to tearing
- many high-strength fabric reinforcements CORDURA
- additional fitter's pockets attached to the belt with a zipper
- elastic belt significantly increasing the comfort of use
- 3M reflective elements, YKK zippers
- specially developed structure with a wedge significantly increases the comfort of use
- modern design

S090178921	S	black	1/10	pc
S090178923	M	black	1/10	pc
S090178925	L	black	1/10	pc
S090178927	XL	black	1/10	pc
S090178929	2XL	black	1/10	pc

Work Jeans



72% COTTON 26% POLYESTER 2% SPANDEX | 360 g/m² | CE Cat. I | EN ISO 13688

Jean

- denim work trousers with classic 5-pocket design
- strong, cotton jeans with spandex ensures high comfort of use
- double seams
- CORDURA reinforcements on the knees and lower leg circumference
- seams reinforced with rivets and additional bolts in places extremely exposed to tearing
- the pants can be transformed into board shorts (removable lower legs)

S090178196	S	navy blue	1/10	pc
S090178198	M	navy blue	1/10	pc
S090178200	L	navy blue	1/10	pc
S090178202	XL	navy blue	1/10	pc
S090178204	2XL	navy blue	1/10	pc
S090178206	3XL	navy blue	1/10	pc
S090178208	4XL	navy blue	1/10	pc

Work Trousers







55% COTTON 45% NYLON | 230 g/m² | CE Cat. I | EN ISO 13688

Dura Twill

- innovative fabric – cotton on the inside, nylon on the outside, provides exceptional comfort of use and a high level of resistance to dirt
- does not absorb water and oil
- fitter's pockets, fastened to the waist with a zipper
- CORDURA fabric reinforcements
- modern design

S090178185	S	black	1/10	pc
S090178187	M	black	1/10	pc
S090178189	L	black	1/10	pc
S090178191	XL	black	1/10	pc
S090178193	2XL	black	1/10	pc
S090178195	3XL	black	1/10	pc
S090178900	S	gray	1/10	pc
S090178901	M	gray	1/10	pc
S090178903	L	gray	1/10	pc
S090178905	XL	gray	1/10	pc
S090178907	2XL	gray	1/10	pc
S090178909	3XL	gray	1/10	pc

Work pants



240 g/m² | 65% POLYESTER 34% COTTON 3% SPANDEX | 100% POLYESTER | CE Cat. I | EN ISO 13688

Viktor

- professional construction
- twill with cotton
- elastic material
- gusset in the crotch
- leg can be extended by 4 cm
- tapered legs and reinforced at the bottom
- 15 pockets and compartments for specific purposes, including:
- knee pockets made of OXFORD 900D for foam inserts
- universal bellows pocket with fastening Velcro and zipper
- 3 compartments, including a phone
- bellows pocket for tools and an A5 notebook
- elastic waistband

S090101007	S	navy blue	1/10	pc
S090101008	M	navy blue	1/10	pc
S090101009	L	navy blue	1/10	pc
S090101010	XL	navy blue	1/10	pc
S090101011	2XL	navy blue	1/10	pc
S090101012	3XL	navy blue	1/10	pc

Women's work trousers



65% POLYESTER 34% COTTON 2% SPANDEX | 100% POLYESTER | Cat. I | 240 g/m² | EN ISO 13688

Viki
- professional design for women
- stretch fabric with cotton twill
- with gusset in the crotch area
- legs can be lengthened by 4 cm
- OXFORD 900D knee pockets for foam inserts
- universal bellows pocket with Velcro and zip closure
- pocket for phone and A5 notebook
- Elastic rubber in waist

S090179341	XS	navy blue	1/10	pc
S090179343	S	navy blue	1/10	pc
S090179345	M	navy blue	1/10	pc
S090179347	L	navy blue	1/10	pc
S090179349	XL	navy blue	1/10	pc
S090179351	2XL	navy blue	1/10	pc
S090179353	3XL	navy blue	1/10	pc

Work Shorts



92% NYLON 8% SPANDEX | Cat. I | 250 g/m² | EN ISO 13688





Stretch Line
- high-quality softshell, stretch fabric
- high quality stitching
- elastic gusset in crotch, 4-way stretch
- 3M Scotchlite reflective elements
- numerous functional CORDURA pockets
- elastic „stretch belt"

S090279312	S	black	1/10	pc
S090279314	M	black	1/10	pc
S090279316	L	black	1/10	pc
S090279318	XL	black	1/10	pc
S090279320	2XL	black	1/10	pc
S090279322	3XL	black	1/10	pc
S090279326	S	olive	1/10	pc
S090279328	M	olive	1/10	pc
S090279330	L	olive	1/10	pc
S090279332	XL	olive	1/10	pc
S090279334	2XL	olive	1/10	pc
S090279336	3XL	olive	1/10	pc

Rain Trousers



50% POLYESTER 50% POLYURETHANE | Cat. I | 350 g/m² | EN ISO 13688

Aqua T
- made of waterproof PLAVITEX material with very high resistance to wind and low ambient temperature
- thermal insulation properties and maintaining body temperature
- glued seams prevent water from seeping in

S090178148	M	green	1/20	pc
S090178149	L	green	1/20	pc
S090178150	XL	green	1/20	pc
S090178151	2XL	green	1/20	pc
S090178152	3XL	green	1/20	pc

Work Shorts



65% POLYESTER 33% COTTON 2% SPANDEX | Cat. I | 250 g/m² | EN ISO 13688

Flex Line
- made of durable and airy RipStop material to prevent tearing
- padding and pockets made of high--strength CORDURA fabric
- flexible belt in the STRETCH BELT system, 3M tapes, YKK zippers, triple seams

S090279221	S	gray	1/10	pc
S090279223	M	gray	1/10	pc
S090279225	L	gray	1/10	pc
S090279227	XL	gray	1/10	pc
S090279229	2XL	gray	1/10	pc
S090279231	3XL	gray	1/10	pc

Fleece Jacket








Navas M
- high thermal insulation properties
- resistance to crushing and pilling
- slightly extended back for better protection against cold
- quick-drying and easy-care fabric

S090478330	S	navy blue melange	1/20	pc
S090478331	M	navy blue melange	1/20	pc
S090478332	L	navy blue melange	1/20	pc
S090478333	XL	navy blue melange	1/20	pc
S090478334	2XL	navy blue melange	1/20	pc
S090478335	3XL	navy blue melange	1/20	pc
S090478336	4XL	navy blue melange	1/20	pc
S090478337	S	gray melange	1/20	pc
S090478338	M	gray melange	1/20	pc
S090478339	L	gray melange	1/20	pc
S090478340	XL	gray melange	1/20	pc
S090478341	2XL	gray melange	1/20	pc
S090478342	3XL	gray melange	1/20	pc
S090478343	4XL	gray melange	1/20	pc
S090478344	S	black melange	1/20	pc
S090478345	M	black melange	1/20	pc
S090478346	L	black melange	1/20	pc
S090478347	XL	black melange	1/20	pc
S090478348	2XL	black melange	1/20	pc
S090478349	3XL	black melange	1/20	pc
S090478350	4XL	black melange	1/20	pc
S090478351	S	olive melange	1/20	pc
S090478352	M	olive melange	1/20	pc
S090478353	L	olive melange	1/20	pc
S090478354	XL	olive melange	1/20	pc
S090478355	2XL	olive melange	1/20	pc
S090478356	3XL	olive melange	1/20	pc
S090478357	4XL	olive melange	1/20	pc

Workwear sweatshirt






Stretch Line
- Cordura inserts
- ventilation, 3D mesh
- 3M Scotchlite reflectors
- Additional cuffs and adjustments
- extended back
- girth adjustment
- All YKK zippers
- high collar

S090479248	S	black	1/10	pc
S090479250	M	black	1/10	pc
S090479252	L	black	1/10	pc
S090479254	XL	black	1/10	pc
S090479256	2XL	black	1/10	pc
S090479258	3XL	black	1/10	pc
S090479281	S	olive	1/10	pc
S090479283	M	olive	1/10	pc
S090479285	L	olive	1/10	pc
S090479287	XL	olive	1/10	pc
S090479289	2XL	olive	1/10	pc
S090479291	3XL	olive	1/10	pc

Fleece Jacket






Oxford
- high-quality fleece
- numerous reinforcements made of OXFORD with PU
- thermal insulation
- reinforced stand-up collar
- sleeves with thumbholes
- reflective elements
- massive square zipper
- 6 multifunctional pockets, including: Napoleon pocket with a zipper, 2 pockets at the waist with a zipper, double waterproof pocket Velcro and zipper
- elastic band and stoppers - waist adjustment

S090478879	S	black	1/10	pc
S090478881	M	black	1/10	pc
S090478883	L	black	1/10	pc
S090478885	XL	black	1/10	pc
S090478887	2XL	black	1/10	pc
S090478889	3XL	black	1/10	pc
S090478890	4XL	black	1/10	pc
S090400014	S	olive	1/10	pc
S090400015	M	olive	1/10	pc
S090400016	L	olive	1/10	pc
S090400017	XL	olive	1/10	pc
S090400018	2XL	olive	1/10	pc
S090400019	3XL	olive	1/10	pc
S090400020	4XL	olive	1/10	pc

Softshell Man Jacket



UNI | 96% POLYESTER 4% SPANDEX | 100% NYLON | 270 g/m²

August M
- hybrid sweatshirt that combines the advantages of a softshell jacket with a quilted vest
- innovative filling with synthetic fluff on the front – super light, quick--drying and perfectly insulating
- modern design

S090478414	S	black	1/10	pc
S090478416	M	black	1/10	pc
S090478418	L	black	1/10	pc
S090478420	XL	black	1/10	pc
S090478422	2XL	black	1/10	pc
S090478423	3XL	black	1/10	pc

Man Hoodie



UNI | 60% COTTON 40% POLYESTER | 100% POLYESTER | 380 g/m² | EN ISO 13688 | CE Cat. I

Spartan M
- innovative, two-layer knit – classic cotton sweatshirt on the outside, soft, fine fleece on the inside
- side seam pockets
- thumb holes at the dowel ends
- reflective elements
- modern design

S090478990	S	gray	1/10	pc
S090478991	M	gray	1/10	pc
S090478992	L	gray	1/10	pc
S090478993	XL	gray	1/10	pc
S090478994	2XL	gray	1/10	pc
S090478995	3XL	gray	1/10	pc

Softshell Woman Jacket



UNI | 96% POLYESTER 4% SPANDEX | 100% NYLON | 270 g/m²

August W
- hybrid sweatshirt that combines the advantages of a softshell jacket with a quilted vest
- innovative filling with synthetic fluff on the front – super light, quick--drying and perfectly insulating
- modern design

S090478837	XS	black	1/10	pc
S090478839	S	black	1/10	pc
S090478841	M	black	1/10	pc
S090478843	L	black	1/10	pc
S090478845	XL	black	1/10	pc
S090478847	2XL	black	1/10	pc

Hoodie



70% COTTON 30% POLYESTER | 380 g/m² | CE Cat. I | EN ISO 13688





Mechanick
- work sweatshirt made of classic sweatshirt fabric
- many high-strength fabric reinforcements
- reflective elements
- modern design

S090478983	S	gray	1/10	pc
S090478984	M	gray	1/10	pc
S090478985	L	gray	1/10	pc
S090478986	XL	gray	1/10	pc
S090478987	2XL	gray	1/10	pc
S090478988	3XL	gray	1/10	pc
S090479155	S	black	1/10	pc
S090479157	M	black	1/10	pc
S090479159	L	black	1/10	pc
S090479161	XL	black	1/10	pc
S090479163	2XL	black	1/10	pc
S090479165	3XL	black	1/10	pc

Man T-Shirt






Lucky M
- classic T-shirt with a timeless design
- high-quality cotton reinforced with highly flexible fiber makes the T-shirt lay perfectly and fit the body

S090678615	S	white	1	pc
S090678617	M	white	1	pc
S090678619	L	white	1	pc
S090678621	XL	white	1	pc
S090678623	2XL	white	1	pc
S090678635	S	black	1	pc
S090678637	M	black	1	pc
S090678639	L	black	1	pc
S090678641	XL	black	1	pc
S090678643	2XL	black	1	pc
S090678655	S	gray	1	pc
S090678657	M	gray	1	pc
S090678659	L	gray	1	pc
S090678661	XL	gray	1	pc
S090678663	2XL	gray	1	pc

Man Polo Shirt





Nature M
- made of high-quality cotton
- knit with „lacosta" weave
- classic polo design

S090678555	S	white	1	pc
S090678557	M	white	1	pc
S090678559	L	white	1	pc
S090678561	XL	white	1	pc
S090678563	2XL	white	1	pc
S090678565	S	black	1	pc
S090678567	M	black	1	pc
S090678569	L	black	1	pc
S090678571	XL	black	1	pc
S090678573	2XL	black	1	pc

Woman T-Shirt





Lucky W
- classic T-shirt with a timeless design
- high-quality cotton reinforced with highly flexible fiber makes the T-shirt lay perfectly and fit the body

S090678675	XS	white	1	pc
S090678677	S	white	1	pc
S090678679	M	white	1	pc
S090678681	L	white	1	pc
S090678683	XL	white	1	pc
S090678695	XS	black	1	pc
S090678697	S	black	1	pc
S090678699	M	black	1	pc
S090678701	L	black	1	pc
S090678703	XL	black	1	pc
S090678715	XS	gray	1	pc
S090678717	S	gray	1	pc
S090678719	M	gray	1	pc
S090678721	L	gray	1	pc
S090678723	XS	gray	1	pc

Insulated High-Visibility Vest



Revers V 2in1
- waterproof and windproof material
- insulated with high-quality filling
- reversible design – can be worn on the quilted grey side
- fastening with a heavy-duty chunky zipper
- 4 vertical pockets with zipper closure
- adjustable bottom width
- extended back for better coverage
- high stand-up collar

S091090001	S	yellow	1/10	pc
S091090002	M	yellow	1/10	pc
S091090003	L	yellow	1/10	pc
S091090004	XL	yellow	1/10	pc
S091090005	2XL	yellow	1/10	pc
S091090006	3XL	yellow	1/10	pc
S091090007	4XL	yellow	1/10	pc

Men's insulated vest







Logan V
- fabric with TPU membrane 3000mm
- insulated jacket
- CORDURA reinforcements
- fashionable cut
- extended back with adjustable waist with stoppers
- detachable, adjustable hood
- reflective elements 3M Scotchlite
- YKK front ankle zipper
- chin protection strip
- 5 pockets with YKK zippers

S091079400	S	olive	1/10	pc
S091079402	M	olive	1/10	pc
S091079404	L	olive	1/10	pc
S091079406	XL	olive	1/10	pc
S091079408	2XL	olive	1/10	pc
S091079410	3XL	olive	1/10	pc
S091000001	4XL	olive	1/10	pc
S091079412	S	black	1/10	pc
S091079414	M	black	1/10	pc
S091079416	L	black	1/10	pc
S091079418	XL	black	1/10	pc
S091079420	2XL	black	1/10	pc
S091079422	3XL	black	1/10	pc
S091000002	4XL	black	1/10	pc

Men's insulated jacket







Logan J
- fabric with TPU membrane 3000 mm
- insulated jacket
- CORDURA reinforcements
- extended back with adjustable waist with stoppers
- detachable, adjustable hood
- adjustable cuffs with snaps
- hidden inside elastic cuffs with thumbholes
- reflective elements 3M Scotchlite
- ankle zipper at the front YKK
- security strip chin
- 5 pockets with YKK zippers

S090779424	S	olive	1/10	pc
S090779426	M	olive	1/10	pc
S090779428	L	olive	1/10	pc
S090779430	XL	olive	1/10	pc
S090779432	2XL	olive	1/10	pc
S090779434	3XL	olive	1/10	pc
S090700001	4XL	olive	1/10	pc
S090779436	S	black	1/10	pc
S090779438	M	black	1/10	pc
S090779440	L	black	1/10	pc
S090779442	XL	black	1/10	pc
S090779444	2XL	black	1/10	pc
S090779446	3XL	black	1/10	pc
S090700002	4XL	black	1/10	pc

Rain Jacket



Aqua J
- made of waterproof PLAVITEX material with very high resistance to wind and low ambient temperature
- thermal insulation properties and maintaining body temperature
- glued seams prevent water from seeping in

S090778138	M	green	1/20	pc
S090778140	L	green	1/20	pc
S090778142	XL	green	1/20	pc
S090778144	2XL	green	1/20	pc
S090778146	3XL	green	1/20	pc

Socks



Django
- perfect fit
- effective protection against abrasions
- thermal comfort
- overheating prevention
- keeping in the correct position
- coolmax
- free air flow
- terry cloth finish

S091379236	35-38	black	1/500	pair
S091379238	39-41	black	1/500	pair
S091379240	42-44	black	1/500	pair
S091379242	45-47	black	1/500	pair

Knee Pads



King
- very robust fabric
- protective gel pillow
- Velcro fastening for comfort and safety at work

S091576210	one size	-	1	set

Thermoactive underwear



Wolverin
- long-sleeved T-shirt
- fitted cut, layered clothing
- thermoactive properties
- round neck
- flat seams, flexible, pressure-free
- quick-drying

S091379100	S / M	black	1/10	pc
S091379102	L / XL	black	1/10	pc
S091379104	2XL / 3XL	black	1/10	pc

Thermoactive underwear



Wolverin
- long johns / men's leggings
- anatomical cut
- thermoactive
- wide, soft elastic waistband
- flat, flexible seams, Autolap technology
- quick-drying

S091379106	S / M	black	1/10	pc
S091379108	L / XL	black	1/10	pc
S091379110	2XL / 3XL	black	1/10	pc

Belt





Survival
- elastic strap
- metal clamp buckle
- one size: 130 cm length, 4 cm width
- adjustable circumference – can be shortened manually
- belt loop included
- end finished with eco-leather
- universal

S091571503	one size	black	1/40	pc
S091571504	one size	khaki	1/40	pc
S091571505	one size	gray	1/40	pc

Trousers Belt



Brigger
- strong, metal clamp with quick and easy fastening system
- circumference adjustment (max 130 cm)
- universal width of 4 cm, matching all trousers

S091578944	130 cm	black	1/40	pc

Trouser suspenders



Braces
- Ergonomic suspenders with wide elastic straps that distribute the load evenly
- they keep the pants in place and ensure all-day comfort of work
- wide, elastic straps for comfort and optimal fit
- wide and comfortable clips
- guarantee a secure clasp
- easy length adjustment

S091579089	one size	-	1/40	pc

Footwear

Occupational Footwear



Defender Low OB
- PU and rubber sole
- suede leather upper
- OXFORD fabric inserts
- WATERPROOF membrane in the upper area
- slip-resistant sole
- oil-resistant sole
- lightweight
- EVA foam insole
- rubber reinforcements at the heel and toe
- bellows tongue





S092105158	38	dark beige	1/10	pair
S092105159	39	dark beige	1/10	pair
S092105160	40	dark beige	1/10	pair
S092105161	41	dark beige	1/10	pair
S092105162	42	dark beige	1/10	pair
S092105163	43	dark beige	1/10	pair
S092105164	44	dark beige	1/10	pair
S092105165	45	dark beige	1/10	pair
S092105166	46	dark beige	1/10	pair
S092105167	47	dark beige	1/10	pair
S092105168	48	dark beige	1/10	pair
S092105169	38	olive	1/10	pair
S092105170	39	olive	1/10	pair
S092105171	40	olive	1/10	pair
S092105172	41	olive	1/10	pair
S092105173	42	olive	1/10	pair
S092105174	43	olive	1/10	pair
S092105175	44	olive	1/10	pair
S092105176	45	olive	1/10	pair
S092105177	46	olive	1/10	pair
S092105178	47	olive	1/10	pair
S092105179	48	olive	1/10	pair

Safety Footwear



Hektor Low S3S
- upper made of waterproof microfiber with TPU print
- PU/PU sole
- treaded outsole
- TPU heel support
- energy absorption in the heel area
- composite toe cap
- textile anti-penetration midsole
- protection against water penetration and absorption
- high-elasticity foam insole
- metal-free
- antistatic
- oil-resistant
- slip-resistant

S092105140	40	-	1/10	pair
S092105141	41	-	1/10	pair
S092105142	42	-	1/10	pair
S092105143	43	-	1/10	pair
S092105144	44	-	1/10	pair
S092105145	45	-	1/10	pair
S092105146	46	-	1/10	pair
S092105147	47	-	1/10	pair
S092105148	48	-	1/10	pair

Safety footwear



Helios Low S3
- composite toecap
- anti-shock system
- properties: oil-resistant, anti-static, non-slip
- anti-puncture sole
- waterproof

S092178000	40	-	1/10	pair
S092178001	41	-	1/10	pair
S092178003	42	-	1/10	pair
S092178005	43	-	1/10	pair
S092178007	44	-	1/10	pair
S092178009	45	-	1/10	pair
S092178011	46	-	1/10	pair
S092178010	47	-	1/10	pair

Safety footwear



S1 PS SR FO | EN ISO 20345

Helios Sandal S1
- composite toecap
- anti-shock system
- properties: non-slip, oil-resistant

S092378039	40	-	1/10	pair
S092378041	41	-	1/10	pair
S092378043	42	-	1/10	pair
S092378045	43	-	1/10	pair
S092378047	44	-	1/10	pair
S092378049	45	-	1/10	pair
S092378051	46	-	1/10	pair

Work footwear



OB FO SR | EN ISO 20347

Olivier OB
- very light
- made of breathable material
- very soft and flexible sole
- composite reinforced nose piece
- anti shock system
- properties: anti-static, anti-slip and oil-resistant
- soft lining
- inner lining protected by a special material to prevent abrasion

S092103040	40	-	1/10	pair
S092103041	41	-	1/10	pair
S092103042	42	-	1/10	pair
S092103043	43	-	1/10	pair
S092103044	44	-	1/10	pair
S092103045	45	-	1/10	pair
S092103046	46	-	1/10	pair
S092103047	47	-	1/10	pair
S092103048	48	-	1/10	pair

Safety footwear



S1 FO SR | EN ISO 20345

Olivia S1
- very light
- made of breathable material
- very soft and flexible sole
- composite reinforced nose piece
- anti shock system
- properties: anti-static, anti-slip and oil-resistant
- soft lining
- inner lining protected by a special material to prevent abrasion

S092179358	35	-	1/10	pair
S092179360	36	-	1/10	pair
S092179362	37	-	1/10	pair
S092179364	38	-	1/10	pair
S092179366	39	-	1/10	pair
S092179368	40	-	1/10	pair

Safety footwear



S1 FO SR | EN ISO 20345

Olivier S1
- very light
- made of breathable material
- very soft and flexible sole
- composite reinforced nose piece
- anti shock system
- properties: anti-static, anti-slip and oil-resistant
- soft lining
- inner lining protected by a special material to prevent abrasion

S092179370	40	-	1/10	pair
S092179372	41	-	1/10	pair
S092179374	42	-	1/10	pair
S092179376	43	-	1/10	pair
S092179378	44	-	1/10	pair
S092179380	45	-	1/10	pair
S092179382	46	-	1/10	pair
S092179384	47	-	1/10	pair
S092179386	48	-	1/10	pair

Safety footwear





Olivier S1PS
- very light
- Kevlar insert
- made of breathable material
- very soft and flexible sole
- composite toe cap
- antishock system
- properties: antistatic, anti-slip and oil-resistant
- soft lining
- inner lining protected with a special material to prevent abrasion

S092104040	40	-	1/10	pair
S092104041	41	-	1/10	pair
S092104042	42	-	1/10	pair
S092104043	43	-	1/10	pair
S092104044	44	-	1/10	pair
S092104045	45	-	1/10	pair
S092104046	46	-	1/10	pair
S092104047	47	-	1/10	pair
S092104048	48	-	1/10	pair

Safety footwear





Scorpion Low S3L
- ESD footwear
- composite toe 200 J
- Kevlar insert 1100 N
- waterproof OXFORD mesh material combined with RIPSTOP
- front part of the shoe protected with natural leather
- PU/PU + ETPU sole
- metal free
- increased water resistance
- antistatic, oil-resistant sole, non-slip

S092102040	40	-	1/10	pair
S092102041	41	-	1/10	pair
S092102042	42	-	1/10	pair
S092102043	43	-	1/10	pair
S092102044	44	-	1/10	pair
S092102045	45	-	1/10	pair
S092102046	46	-	1/10	pair
S092102047	47	-	1/10	pair
S092102048	48	-	1/10	pair

Safety footwear





Pionier Low S3S
- natural nubuck leather
- composite toe 200 J
- Kevlar insert 1100 N
- poured toe
- PU/PU sole
- metal free
- increased water resistance
- antistatic, oil-resistant sole, anti-slip
- built-in heel leather
- replaceable foam insert
- contoured shoe interior
- Anti - Shock System
- reflective element

S092179490	40	-	1/10	pair
S092179492	41	-	1/10	pair
S092179494	42	-	1/10	pair
S092179496	43	-	1/10	pair
S092179498	44	-	1/10	pair
S092179500	45	-	1/10	pair
S092179502	46	-	1/10	pair
S092179504	47	-	1/10	pair
S092179506	48	-	1/10	pair

Safety footwear





Raptor S1P
- composite toecap
- metal-free
- anti-shock system
- properties: oil-resistant, anti-static, non-slip
- anti-puncture sole
- reflective elements

S092178516	40	-	1/10	pair
S092178517	41	-	1/10	pair
S092178519	42	-	1/10	pair
S092178521	43	-	1/10	pair
S092178523	44	-	1/10	pair
S092178525	45	-	1/10	pair
S092178527	46	-	1/10	pair
S092178528	47	-	1/10	pair
S092178530	48	-	1/10	pair

Safety footwear





Active S1
- soft sole made of Eva material with increased flexibility, cushioning and resistance to external conditions
- profiled insoles for shoes included for better foot stability and heel shock absorption
- composite toecap
- metal-free
- anti-shock system
- properties: oil-resistant, anti-static, non-slip
- breathing

S092179065	40	-	1/10	pair
S092179066	41	-	1/10	pair
S092179067	42	-	1/10	pair
S092179068	43	-	1/10	pair
S092179069	44	-	1/10	pair
S092179070	45	-	1/10	pair
S092179071	46	-	1/10	pair
S092179087	47	-	1/10	pair
S092179088	48	-	1/10	pair

Safety footwear





Softer S1
- composite-reinforced toecap
- anti-shock system
- properties: anti-static, non-slip, oil-resistant
- modern design

S092378447	40	-	1/5	pair
S092378449	41	-	1/5	pair
S092378451	42	-	1/5	pair
S092378453	43	-	1/5	pair
S092378455	44	-	1/5	pair
S092378457	45	-	1/5	pair
S092378459	46	-	1/5	pair

Work footwear





Active O1
- soft sole made of Eva material with increased flexibility, cushioning and resistance to external conditions
- profiled insoles for shoes included for better foot stability and heel shock absorption
- anti-shock system
- properties: oil-resistant, anti-static, non-slip
- breathing

S092179200	40	-	1/10	pair
S092179202	41	-	1/10	pair
S092179204	42	-	1/10	pair
S092179206	43	-	1/10	pair
S092179208	44	-	1/10	pair
S092179210	45	-	1/10	pair
S092179212	46	-	1/10	pair
S092179214	47	-	1/10	pair
S092179216	48	-	1/10	pair

Occupational Footwear











Defender High OB
- PU and rubber sole
- suede leather upper
- OXFORD fabric inserts
- WATERPROOF membrane
- slip-resistant sole
- oil-resistant sole
- EVA foam insole
- rubber reinforcements at heel and toe
- bellows tongue
- lightweight

S092207038	38	olive	1/10	pair
S092207039	39	olive	1/10	pair
S092207040	40	olive	1/10	pair
S092207041	41	olive	1/10	pair
S092207042	42	olive	1/10	pair
S092207043	43	olive	1/10	pair
S092207044	44	olive	1/10	pair
S092207045	45	olive	1/10	pair
S092207046	46	olive	1/10	pair
S092207047	47	olive	1/10	pair
S092207048	48	olive	1/10	pair
S092208038	38	olive	1/10	pair
S092208039	39	olive	1/10	pair
S092208040	40	olive	1/10	pair
S092208041	41	olive	1/10	pair
S092208042	42	olive	1/10	pair
S092208043	43	olive	1/10	pair
S092208044	44	olive	1/10	pair
S092208045	45	olive	1/10	pair
S092208046	46	olive	1/10	pair
S092208047	47	olive	1/10	pair
S092208048	48	olive	1/10	pair
S092205180	38	dark beige	1/10	pair
S092205181	39	dark beige	1/10	pair
S092205182	40	dark beige	1/10	pair
S092205183	41	dark beige	1/10	pair
S092205184	42	dark beige	1/10	pair
S092205185	43	dark beige	1/10	pair
S092205186	44	dark beige	1/10	pair
S092205187	45	dark beige	1/10	pair
S092205188	46	dark beige	1/10	pair
S092205189	47	dark beige	1/10	pair
S092205190	48	dark beige	1/10	pair
S092205200	38	black	1/10	pair
S092205201	39	black	1/10	pair
S092205202	40	black	1/10	pair
S092205203	41	black	1/10	pair
S092205204	42	black	1/10	pair
S092205205	43	black	1/10	pair
S092205206	44	black	1/10	pair
S092205207	45	black	1/10	pair
S092205208	46	black	1/10	pair
S092205209	47	black	1/10	pair
S092205210	48	black	1/10	pair

Safety Footwear



Hektor High S3S
- upper made of waterproof microfiber with TPU print
- PU/PU sole
- treaded outsole
- TPU heel support
- energy absorption in the heel area
- composite toe cap
- textile anti-penetration midsole
- protection against water penetration and absorption
- high-elasticity foam insole
- metal free
- antistatic
- oil-resistant
- slip-resistant

S092211240	40	-	1/10	pair
S092211241	41	-	1/10	pair
S092211242	42	-	1/10	pair
S092211243	43	-	1/10	pair
S092211244	44	-	1/10	pair
S092211245	45	-	1/10	pair
S092211246	46	-	1/10	pair
S092211247	47	-	1/10	pair
S092211248	48	-	1/10	pair

Occupational Footwear



Roofer O3S
- resistance to oils and fuels (FO)
- high-temperature resistance (300°C / 1 min)
- slip resistance (SR)
- PEP-COM anti-penetration insole
- lightweight and cushioned
- reflective elements
- innovative sole (EPR + RB)
- TPU – sole material
- EVA – lightweight cushioning foam
- rubber – provides durability and grip

S092205040	40	-	1/5	pair
S092205041	41	-	1/5	pair
S092205042	42	-	1/5	pair
S092205043	43	-	1/5	pair
S092205044	44	-	1/5	pair
S092205045	45	-	1/5	pair
S092205046	46	-	1/5	pair
S092205047	47	-	1/5	pair
S092205048	48	-	1/5	pair

Safety Footwear



Cat. II | EN ISO 20345 | S3S FO SR LG ESD | ESD

Formen S3S
- natural cow leather
- PU/PU sole
- TPU inserts
- composite toe cap
- Kevlar insole
- ladder grip (LG)
- protection against electrostatic discharge (ESD)
- enhanced water resistance (moisture protection)
- resistance to oils and fuels (FO)
- slip-resistant sole (SR)
- antistatic properties
- shock-absorbing properties

S092211270	40	-	1/10	pair
S092211271	41	-	1/10	pair
S092211272	42	-	1/10	pair
S092211273	43	-	1/10	pair
S092211274	44	-	1/10	pair
S092211275	45	-	1/10	pair
S092211276	46	-	1/10	pair
S092211277	47	-	1/10	pair
S092211278	48	-	1/10	pair

Safety footwear



Cat. II | S3 SRC | EN ISO 20345

Hulk S3
- natural „waxy" leather subjected to special waxing and oiling for exceptional resistance to adverse weather conditions
- composite toecap
- metal-free
- waterproof
- anti-puncture sole
- anti-shock system
- properties: oil-resistant, anti-static, non-slip
- reflective elements

S092278937	40	-	1/5	pair
S092278938	41	-	1/5	pair
S092278939	42	-	1/5	pair
S092278940	43	-	1/5	pair
S092278941	44	-	1/5	pair
S092278942	45	-	1/5	pair
S092278943	46	-	1/5	pair

Safety footwear



Cat. II | S3S SR FO | EN ISO 20345

Helios High S3
- composite toecap
- anti-shock system
- properties: oil-resistant, anti-static, non-slip
- anti-puncture sole
- waterproof

S092278026	38	-	1/10	pair
S092278028	39	-	1/10	pair
S092278012	40	-	1/10	pair
S092278013	41	-	1/10	pair
S092278015	42	-	1/10	pair
S092278017	43	-	1/10	pair
S092278019	44	-	1/10	pair
S092278021	45	-	1/10	pair
S092278023	46	-	1/10	pair
S092278024	47	-	1/10	pair

Safety footwear



Cat. II | S3S FO SR | EN ISO 20345

Pionier High S3S
- natural nubuck leather
- composite toe 200 J
- Kevlar insert 1100 N
- poured toe
- PU/PU sole
- metal free
- increased water resistance
- antistatic, oil-resistant sole, anti-slip
- built-in heel leather
- replaceable foam insert
- contoured shoe interior
- Anti - Shock System
- reflective element

S092279470	40	-	1/10	pair
S092279472	41	-	1/10	pair
S092279474	42	-	1/10	pair
S092279476	43	-	1/10	pair
S092279478	44	-	1/10	pair
S092279480	45	-	1/10	pair
S092279482	46	-	1/10	pair
S092279484	47	-	1/10	pair
S092279486	48	-	1/10	pair

Safety footwear






Scorpion High S3L
- ESD footwear
- composite toe 200 J
- Kevlar insert 1100 N
- waterproof OXFORD mesh material combined with RIPSTOP
- front part of the shoe protected with natural leather
- PU/PU + ETPU sole
- metal free
- increased water resistance
- antistatic, oil-resistant sole, non-slip

S092279450	40	-	1/10	pair
S092279452	41	-	1/10	pair
S092279454	42	-	1/10	pair
S092279456	43	-	1/10	pair
S092279458	44	-	1/10	pair
S092279460	45	-	1/10	pair
S092279462	46	-	1/10	pair
S092279464	47	-	1/10	pair
S092279466	48	-	1/10	pair

Safety footwear





Kuller Black
- made of modified PVC
- metal toecap
- waterproof
- properties: anti-static, oil-resistant, non-slip

S092578061	37	-	1/10	pair
S092578062	38	-	1/10	pair
S092578063	39	-	1/10	pair
S092578087	40	-	1/10	pair
S092578088	41	-	1/10	pair
S092578090	42	-	1/10	pair
S092578092	43	-	1/10	pair
S092578093	44	-	1/10	pair
S092578094	45	-	1/10	pair
S092578095	46	-	1/10	pair
S092578097	47	-	1/10	pair

Work footwear





Howard
- made of PVC
- non-slip sole
- resistant to oils
- energy absorption in the heel> 20J
- modern design

S092578073	40	-	1/6	pair
S092578075	41	-	1/6	pair
S092578077	42	-	1/6	pair
S092578079	43	-	1/6	pair
S092578081	44	-	1/6	pair
S092578083	45	-	1/6	pair
S092578085	46	-	1/6	pair

Rubber Clogs





Crokks W
- super light
- made of material with increased flexibility, cushioning and resistance to external conditions

S092478070	37	-	1/10	pair
S092478072	38	-	1/10	pair
S092478074	39	-	1/10	pair
S092478076	40	-	1/10	pair
S092478078	41	-	1/10	pair

Rubber Clogs

EVA



Crokks M
- super light
- made of material with increased flexibility, cushioning and resistance to external conditions

S092478080	42	-	1/10	pair
S092478082	43	-	1/10	pair
S092478084	44	-	1/10	pair
S092478086	45	-	1/10	pair

Shoe Insoles



Sportgel
- breathing
- profiling for improved stability
- gel insert cushioning the heel

S092676432	36	-	1/100	pair
S092676433	37	-	1/100	pair
S092676434	38	-	1/100	pair
S092676435	39	-	1/100	pair
S092676436	40	-	1/100	pair
S092676437	41	-	1/100	pair
S092676438	42	-	1/100	pair
S092676439	43	-	1/100	pair
S092676440	44	-	1/100	pair
S092676441	45	-	1/100	pair
S092676442	46	-	1/100	pair
S092676443	47	-	1/100	pair
S092676444	48	-	1/100	pair

Shoe Insoles



Flexgel
- contoured shape
- soft PU foam
- breathable fabric
- shock-absorbing gel insert
- high wearing comfor

S092676545	36	-	1/100	pair
S092676546	37	-	1/100	pair
S092676547	38	-	1/100	pair
S092676548	39	-	1/100	pair
S092676549	40	-	1/100	pair
S092676550	41	-	1/100	pair
S092676551	42	-	1/100	pair
S092676552	43	-	1/100	pair
S092676553	44	-	1/100	pair
S092676554	45	-	1/100	pair
S092676555	46	-	1/100	pair
S092676556	47	-	1/100	pair
S092676557	48	-	1/100	pair

Laces



Laces
- Laces manufactured from specially selected polyester fibres with a diameter of 5 mm.
- Reinforced with an abrasion- and tear-resistant core, for a very long service life.
- The laces are resistant to moisture and harsh conditions

S-76446	100 cm	-	10/100	pc
S-76448	120 cm	-	10/100	pc
S-76450	150 cm	-	10/100	pc

Gloves

Safety Gloves



S-Skin Fire
- professional application
- reinforced seams with Kevlar thread
- long cuff
- additional structural reinforcements
- abrasion resistance
- high-temperature resistance
- type A construction
- moisture-absorbing lining
- two linings: fleece knit and textile fabric
- ergonomic palm grip

S093357336	10	-	1/6/60	pair

Safety Gloves



Nitrax Diamond
- Nitrile
- Powder-free
- LATEX-FREE
- 3D diamond texture
- High precision
- Air circulation
- Black color
- High durability
- Ambidextrous design
- Touch screen compatible
- Rolled cuff
- Resistance to viruses, bacteria, and fungi
- Non-sterile
- Chemical resistance (Type B)
- AQL 4.0
- Elasticity and tear resistance

S093110111	8	-	50/500	pc
S093110112	9	-	50/500	pc
S093110113	10	-	50/500	pc
S093110114	11	-	50/500	pc

Safety Gloves



Latex X
- soft and flexible
- weave, 15 g
- abrasion-resistant

S093200007	7	-	12/120	pair
S093200008	8	-	12/120	pair
S093200009	9	-	12/120	pair
S093200010	10	-	12/120	pair
S093200011	11	-	12/120	pair

Safety Gloves



Latex Foam
- latex coating
- 13g weave
- firm grip
- fluorescent

S093276311	8	-	12/120	pair
S093276313	9	-	12/120	pair
S093276315	10	-	12/120	pair
S093276314	11	-	12/120	pair

Safety Gloves



High Drag
- latex coating
- 10g weave
- tear-resistant
- resistant to abrasion
- firm grip

S093276335	9	-	12/120	pair
S093276337	10	-	12/120	pair
S093276338	11	-	12/120	pair

Safety Gloves



Latex H
- latex coating
- 13g weave
- firm grip
- resistant to abrasion

S093276332	6	-	12/120	pair
S093276336	7	-	12/120	pair
S093276339	8	-	12/120	pair
S093276341	9	-	12/120	pair
S093276343	10	-	12/120	pair
S093276344	11	-	12/120	pair

Safety Gloves



Nitrile Flex Dots
- nitrile coating
- 15g weave
- innovative manufacturing technology
- precision of movement
- resistant to abrasion
- breathing
- ultralight
- flexible
- non-slip surface
- firm grip

S093276346	6	-	12/120	pair
S093276316	7	-	12/120	pair
S093276317	8	-	12/120	pair
S093276319	9	-	12/120	pair
S093276321	10	-	12/120	pair
S093276322	11	-	12/120	pair

Safety Gloves



Aqua Foam
- foam latex coating
- 15-gauge knit
- increased resistance to water
- innovative manufacturing technology
- dipped fingertips
- excellent grip
- each pair blister-packed with a barcode
- finished with an elastic cuff

S093276410	7	-	12/120	pair
S093276412	8	-	12/120	pair
S093276414	9	-	12/120	pair
S093276416	10	-	12/120	pair
S093276418	11	-	12/120	pair

Safety Gloves



Nitrile Flex
- nitrile coating
- 15g weave
- innovative manufacturing technology
- precision of movement
- resistant to abrasion
- breathing
- ultralight
- flexible

S093276348	6	-	12/120	pair
S093276328	7	-	12/120	pair
S093276329	8	-	12/120	pair
S093276331	9	-	12/120	pair
S093276333	10	-	12/120	pair
S093276334	11	-	12/120	pair

Safety Gloves



Winter Foam
- double latex coating: I - smooth, waterproof, II - foam, provides a firm grip
- 15 g weave
- innovative touch screen technology allowing smart phone operation without removing gloves
- interior lining made of acrylic
- provide excellent grip
- water resistance
- each blistered pair with a barcode
- with a welt

S093276395	8	-	12/120	pair
S093276396	9	-	12/120	pair
S093276397	10	-	12/120	pair
S093276398	11	-	12/120	pair

Safety Gloves



Nitrile Flex Foam
- nitrile coating
- 18g weave
- innovative manufacturing technology
- precision of movement
- resistant to abrasion
- breathing
- ultralight
- flexible
- non-slip surface
- firm grip

S093276399	6	-	12/120	pair
S093276401	7	-	12/120	pair
S093276403	8	-	12/120	pair
S093276405	9	-	12/120	pair
S093276407	10	-	12/120	pair
S093276409	11	-	12/120	pair

Safety Gloves



Poli H
- polyurethane coating
- 18g weave
- precision of movement
- ultra light
- innovative manufacturing technology

S093276318	6	-	12/120	pair
S093276320	7	-	12/120	pair
S093276323	8	-	12/120	pair
S093276325	9	-	12/120	pair
S093276327	10	-	12/120	pair
S093276330	11	-	12/120	pair

Safety Gloves



Multi-Function
- Velcro
- tear-resistant
- innovative manufacturing technology
- flexible

S093479072	8	-	1/72	pair
S093479073	9	-	1/72	pair
S093479074	10	-	1/72	pair
S093479090	11	-	1/72	pair

Safety Gloves



Skin Comfort Grip
- natural leather
- breathing
- firm grip
- flexible

S093376353	8	-	1/72	pair
S093376354	9	-	1/72	pair
S093376355	10	-	1/72	pair
S093376356	11	-	1/72	pair

Safety Gloves



Hi-Vis Gripper
- fluorescent
- Velcro
- innovative manufacturing technology
- flexible

S093479075	8	-	1/72	pair
S093479076	9	-	1/72	pair
S093479077	10	-	1/72	pair
S093479091	11	-	1/72	pair

Safety Gloves



Soft Grip
- Velcro
- breathing
- firm grip
- flexible

S093476350	8	-	1/72	pair
S093476351	9	-	1/72	pair
S093476352	10	-	1/72	pair
S093479092	11	-	1/72	pair

Safety Gloves



Latex Foam G
- latex coating
- 13g weave
- firm grip
- fluorescent

S093280700	6	-	12/120	pair
S093280701	7	-	12/120	pair
S093280703	8	-	12/120	pair

Safety Gloves



Skin Soft Garden
- soft and flexible
- breathing
- resistant to abrasion

S093380706	6	-	12/72	pair
S093380704	7	-	12/72	pair
S093380705	8	-	12/72	pair

Head and face protection

Termoactive Infinity Scarf





Hugo
- excellent additional face protection in adverse weather conditions
- flexible, light, breathable
- reflective elements

S091479009	-	gray	1/100	pc
S091479010	-	black	1/100	pc
S091479011	-	blue	1/100	pc

Termoavtive Cap





Coopter
- perfectly fits the shape and size of one's head
- flexible, light, breathable
- reflective elements

S091479001	men	gray	1/100	pc
S091479004	men	black	1/100	pc
S091479005	men	navy blue	1/100	pc
S091479006	women's	gray	1/100	pc
S091479007	women's	graphite	1/100	pc
S091479008	women's	navy blue	1/100	pc

Winter hat



Oslo
- double-layer
- double-sided
- black and olive color
- with an interesting, contemporary pattern
- universal size

S091479510	one size	olive	1/50	pc

Man Cap





Jacob
- timeless design
- vents
- circumference adjustment
- cotton protective strip around the forehead

S091479079	-	gray	1/200	pc
S091479080	-	navy blue	1/200	pc
S091479081	-	olive	1/200	pc
S091479084	-	black	1/200	pc

Industrial Helmet

ETHANE POLYMER | CE Cat. III | EN 397





EVO 3
- resistant to molten metal splashes
- knob adjustment in the circumference of the main belt 53-64 cm
- 6-point harness made of LDPE
- 3-point harness depth adjustment ensures adjustment to any head size
- air vents at the front and rear for optimal air circulation – reduce the temperature by an average of 2-3°C
- suitable for use in temperature range from -30°C to +50°C

S095178501	-	yellow	1/10	pc
S095178503	-	orange	1/10	pc
S095178505	-	green	1/10	pc
S095178507	-	white	1/10	pc
S095178509	-	blue	1/10	pc
S095178511	-	red	1/10	pc

Chin Strap



Chin
- ensures a stable position of the helmet
- prevents slipping during sudden movements

S095278190	one size	-	1/10	pc

Chin Strap



Four
- ensures a stable position of the helmet thanks to 4-point fastening
- prevents slipping during sudden movements

S095278194	one size	-	1/10	pc

Respiratory protection

Filtering Half Mask with Valve

CE Cat. III | EN 149



Puro
- FFP3 protection class
- exhalation valve
- adjustable straps
- molded nose bridge
- shaped face seal
- made of polypropylene and polyester
- ergonomic design
- face seal
- applications
- individually packed, 5 pieces per box

S094247239	one size	-	5/100	pc

Eye protection

Safety Glasses

UNI | CE Cat. II | EN 166 | EN 170 | EN 172





Ultra Light
- extremely thin lens with remarkable optical properties
- optimized, aerodynamic shape improves ventilation
- ultra-light frame structure made of high-tech polymers
- the innovative temple concept ensures a perfect fit
- weight 18 g

S096178435	-	white	1/200	pc
S096178436	-	green	1/200	pc
S096178437	-	black	1/200	pc

Hearing protection

Ear Protectors / Ear Muffs



Thor
- noise reduction up to 35 dB
- double TPE headband
- rotating ABS ear cups
- soft PU cushions
- telescopic metal construction
- height adjustment
- stainless steel components
- ergonomic sliders
- increased internal space
- built-in high-density acoustic foam

S097178444	one size	-	1/20	pc

Ear Protectors / Ear Muffs



Thor D
- noise reduction up to 34 dB
- helmet-mounted version
- three-position adjustment system
- rotating ABS ear cups
- soft cushions
- stainless steel components
- ergonomic sliders
- built-in high-density acoustic foam

S097178448	one size	-	1/20	pc

Fall protection

Shock-Absorbing Lanyard



Verta
- 30 mm polyester webbing
- length 1.8 m
- attachment components:
- – steel carabiner with screw lock
- – steel hook with 50.8 mm gate opening
- 35 mm shock absorber
- for scaffolding work and all tasks where fall protection is essential

S098379087	one size	-	1/12	pc

Snap Hook / Locking Screw Carabiner



Hok
- screw lock
- steel with anti-corrosion coating
- gate opening 18 mm
- strength 25 kN

S098679088	one size	-	1/100	pc

Self-Locking Device / Fall Arrester



Holder
- core polyester rope, 10 m long
- attachment components: knot and carabiner
- fall absorber
- breaking strength above 15 kN
- wear indicator
- for work on sloped roofs

S098479089	one size	-	1/10	pc

Work Positioning Lanyard



Korda
- wear indicator
- loop ends with thimbles
- length 1.5 m
- core polyamide rope, 11 mm diameter

S098279090	one size	-	1/50	pc

Safety Kit



Grevert
- The set includes: • safety harness - 2 attachment points, adjustable leg loops, elements made of durable polyester and steel • shock absorbing rope - 1.8 m long, 30 mm polyester webbing, 35 mm shock absorber, steel hook and carabiner with screw lock • storage bag - practical and durable - for storing and carrying equipment

S098579091	one size	-	1	pc

Safety Harness



Grekon
- perfect fit thanks to the buckles that allow adjusting the leg straps
- dorsal catch located at the crossing of risers

S098179085	-	black and gray	1/10	pc

STALCO
GARDEN



GARDEN

STALCO GARDEN

PRODUCT SERIES:

Extreme quality for extreme challenges

The Extreme garden products line is not just a range of garden accessories, it is a complete solution for anyone with extreme challenges on the farm, on the construction site or in other areas. We offer top quality, reliability and versatility to meet the most demanding tasks.

XTR

The power of passion and experience

The Expert garden products line combines excellent quality and attractive design. Created for enthusiasts who expect not only versatility but also attractive design in their garden. Each product has been carefully crafted from the highest quality materials, ensuring durability even in the toughest garden conditions.

EXP

The joy of discovery

The Starter garden products line is ideal for those who are new to gardening. Designed with ease of use and efficiency in mind, our tools and accessories will make tending the garden a pleasure even for novice gardeners.

STR

Timeless durability and style

The Brass garden products line is the essence of durability and elegance in garden irrigation. Created from top-quality brass, our products combine functionality with timeless design, raising standards among irrigation systems.

BRS

STALCO GARDEN

TECHNOLOGIES AND MATERIALS
used in our irrigation fittings, hoses and cutting tools:

FITS WITH OTHER BRANDS
UNI FIT

Universal connection system, compatible with fittings from other manufacturers

ATS2
ANTI TWIST SYSTEM

System to prevent kinking and tangling of the hose during use, based on a combination of straight tricot braid and cross braid

ATS
ANTI TWIST SYSTEM

System to prevent kinking and tangling of the hose during use, based on a slanted tricot braid

HIGH FLOW

Connection system for fittings with increased water flow rate

CLAW FIT

The claw system enables fittings to be connected in a quick and stable way

TPR

Thermoplastic material with high resistance and strength. Increased comfort thanks to rubber structure

ABS

Plastic with high impact resistance

HDPE

Plastic characterised by durability and resistance to stress cracks and impacts

ALUMINIUM

Lightweight, robust and corrosion-resistant

BRASS

Durable and corrosion-resistant

SK5 STEEL

Japanese high-carbon steel that keeps cutting tool blades sharp for a long time, ensuring precision cutting without the need for frequent sharpening

PTFE COATING

Protects cutting tool blades from corrosion, makes cleaning easier and reduces friction during operation



Systemy nawadniania

XTR quick connector



FITS WITH OTHER BRANDS UNI FIT

- ABS
- TPR
- aluminum
- extended clamping nut

S101010000	1/2"	1/12/120	pc
S101010006	3/4"	1/12/120	pc

Quick connector with XTR alloy



FITS WITH OTHER BRANDS UNI FIT

- ABS
- TPR
- aluminum
- extended clamping nut

S101010003	1/2"	1/12/120	pc
S101010009	3/4"	1/12/120	pc

Quick connector with XTR valve



FITS WITH OTHER BRANDS UNI FIT

- ABS
- TPR
- aluminum
- extended clamp nut opening and closing valve, for regulating water flow

S101010012	1/2"	1/12/120	pc
S101010015	3/4"	1/12/120	pc

XTR Repairer



- ABS
- aluminum
- extended clamping nut

S101010030	1/2"	1/12/120	pc
S101010033	3/4"	1/12/120	pc
S101010036	1/2" - 3/4"	1/12/120	pc

XTR double connector



FITS WITH OTHER BRANDS UNI FIT

- aluminum

S101010042	-	1/48	pc

XTR triple connector



FITS WITH OTHER BRANDS UNI FIT

- aluminum

S101010045	-	1/48	pc

Connection with XTR internal thread



FITS WITH OTHER BRANDS UNI FIT

- aluminum

S101010051	3/4"	1/48	pc
S101010054	1"	1/48	pc

Connection with XTR internal thread



FITS WITH OTHER BRANDS UNI FIT

- aluminum
- connection with reduction

S101010057	1/2 - 3/4"	1/48	pc
S101010060	3/4" - 1"	1/48	pc

Connection with XTR male thread



FITS WITH OTHER BRANDS UNI FIT

- aluminum

S101010066	3/4"	1/48	pc

XTR double distributor



- two-way division of the water source
- opening and closing valves to regulate the water flow
- aluminum

S101010072	-	1/6/24	pc

XTR 8-function spray gun

FITS WITH OTHER BRANDS UNI FIT



- aluminum
- ABS
- TPR
- 8 sprinkling functions
- water flow regulation
- resistant, aluminum connection

S101210033	-	1/12/24	pc

XTR quadruple distributor



- two-way division of the water source
- opening and closing valves to regulate the water flow
- aluminum

S101010075	-	1/6/24	pc

XTR 6-function spray gun

FITS WITH OTHER BRANDS UNI FIT



- aluminum
- ABS
- TPR
- 6 sprinkling functions
- water flow regulation
- resistant, aluminum connection

S101210039	-	1/6/24	pc

XTR adjustable spray nozzle

FITS WITH OTHER BRANDS UNI FIT



- aluminum
- TPR
- spray stream regulation

S101210000	-	1/12/48	pc

6-function XTR turbine sprinkler

FITS WITH OTHER BRANDS UNI FIT



- regulation of the sprinkling area
- 6 sprinkling functions
- metal, stable pin
- resistant aluminum connection
- maximum sprinkling area 490 m2

S101410042	-	1/6	pc

XTR adjustable spray gun

FITS WITH OTHER BRANDS UNI FIT



- aluminum
- ABS
- TPR
- adjustable spray stream
- adjustable water flow
- resistant, aluminum connection

S101210030	-	1/12/24	pc

XTR adjustable oscillating sprinkler

FITS WITH OTHER BRANDS UNI FIT



- regulation of the spraying area
- resistant aluminum connection
- silicone nozzles reduce the risk of clogging
- needle for cleaning dirty nozzles
- maximum spraying area 418m2

S101410081	with plastic base	1/6	pc
S101410084	with metal base	1/6	pc

XTR metal hose hanger



- strong, metal construction
- holes for mounting to the wall
- hanger capacity:
- 1/2" - 40m
- 5/8" - 35m
- 3/4" - 25m

S101610006	-	1/24	pc

Metal reel for XTR hose



- strong, metal construction
- guide for easy rewinding of the hose
- crank with a comfortable handle
- shelf for storing fittings or tools
- holes for mounting to the wall
- capacity of the reel:
- 1/2" - 60m
- 5/8" - 40m
- 3/4" - 30m

S101610012	60 m	1	pc

Metal trolley for XTR hose



- strong, metal construction
- guide for easy hose rewinding
- crank with comfortable handle
- large transport wheels
- shelf for storing fittings or tools
- trolley capacity:
- 1/2" - 60m
- 5/8" - 40m
- 3/4" - 30m

S101610015	60 m	1	pc

EXP feed-through quick connector



FITS WITH OTHER BRANDS UNI FIT

- ABS
- TPR

S101010200	1/2"	1/24/240	pc
S101010206	3/4"	1/24/240	pc

Quick connector with EXP alloy



FITS WITH OTHER BRANDS UNI FIT

- ABS
- TPR

S101010203	1/2"	1/24/240	pc
S101010209	3/4"	1/24/240	pc

Quick connector with EXP valve



FITS WITH OTHER BRANDS UNI FIT

- ABS
- TPR
- opening and closing valve, to regulate water flow

S101010212	1/2"	1/24/240	pc
S101010215	3/4"	1/24/240	pc

Reparator EXP



- ABS
- TPR

S101010230	1/2"	1/24/240	pc
S101010233	3/4"	1/24/240	pc

Reparator EXP



- ABS
- TPR
- reduction joint

S101010236	1/2" - 3/4"	1/24/240	pc

EXP double connector

EXP

FITS WITH OTHER BRANDS UNI FIT



- ABS

S101010242	-	1/200	pc

EXP triple connector

EXP

FITS WITH OTHER BRANDS UNI FIT



- ABS

S101010245	-	1/200	pc

EXP internal thread connection

EXP

FITS WITH OTHER BRANDS UNI FIT



- ABS
- TPR

S101010251	3/4"	1/24/240	pc
S101010254	1"	1/24/240	pc

EXP internal thread connection

EXP

FITS WITH OTHER BRANDS UNI FIT



- ABS
- TPR
- connection with reduction

S101010257	1/2" - 3/4"	1/24/240	pc
S101010260	3/4" - 1"	1/24/240	pc

EXP external thread connection

EXP

FITS WITH OTHER BRANDS UNI FIT



- ABS

S101010263	1/2"	1/400	pc
S101010266	3/4"	1/200	pc

EXP double distributor

EXP

FITS WITH OTHER BRANDS UNI FIT



- two-way division of the water source
- opening and closing valves to regulate the water flow
- ABS
- TPR

S101010272	-	1/6/24	pc

EXP quadruple distributor

EXP

FITS WITH OTHER BRANDS UNI FIT



- two-way division of the water source
- opening and closing valves to regulate the water flow
- ABS
- TPR

S101010275	-	1/6/24	pc

EXP water flow timer

EXP

FITS WITH OTHER BRANDS UNI FIT



- ABS
- TPR
- irrigation time range up to 120 minutes

S101010281	-	1/12/48	pc

EXP adjustable spray nozzle

EXP

FITS WITH OTHER BRANDS UNI FIT



- ABS
- TPR
- spray flow adjustment

S101210200	-	1/24/240	pc

4-piece set with EXP spray nozzle

EXP

FITS WITH OTHER BRANDS UNI FIT



- set of connectors with an spray nozzle
- ABS
- TPR

S101210212	1/2"	1/12/48	pc
S101210215	3/4"	1/12/48	pc

7-function metal spray gun EXP

EXP

FITS WITH OTHER BRANDS UNI FIT



- aluminum
- TPR
- 7 sprinkling functions

S101210254	-	1/12/48	pc

EXP adjustable spray gun

EXP

FITS WITH OTHER BRANDS UNI FIT



- ABS
- TPR
- spray flow adjustment

S101210230	-	1/12/48	pc

8-function sprinkler based on EXP

EXP

FITS WITH OTHER BRANDS UNI FIT



- ABS
- stable base
- 8 sprinkling functions

S101410215	-	1/12/24	pc

7-function EXP spray gun

EXP

FITS WITH OTHER BRANDS UNI FIT



- ABS
- TPR
- 7 sprinkler functions

S101210233	-	1/12/48	pc

Three-arm rotary sprinkler based on EXP

EXP

FITS WITH OTHER BRANDS UNI FIT



- ABS
- three-arms
- adjustment of the spraying area with sprinkler arms
- stable base with integrated mounting pins
- maximum spraying diameter 10m

S101410230	-	1/24	pc

Adjustable metal spray gun EXP

EXP

FITS WITH OTHER BRANDS UNI FIT



- aluminum
- TPR
- spray stream regulation

S101210251	-	1/12/48	pc

Metal pulsating sprinkler with EXP pin

EXP

FITS WITH OTHER BRANDS UNI FIT



- aluminum
- ABS
- adjustment of the spraying area
- metal pin
- can be connected in series
- operating range from 5° to 360°
- maximum spraying area 530m2

S101410251	-	1/6/24	pc

EXP oscillating sprinkler

EXP

FITS WITH OTHER BRANDS
UNI FIT



- ABS
- regulation of the spraying area
- needle for cleaning dirty nozzles
- maximum spraying area 280m2

S101410281	-	1/6	pc

EXP hose reel

EXP



- aluminum and plastic construction
- crank with comfortable handle
- assembly without tools
- retractor capacity
- 1/2" - 45m
- 5/8" - 30m

S101610212	45 m	1/5	pc

EXP adjustable oscillating sprinkler

EXP

FITS WITH OTHER BRANDS
UNI FIT



- ABS
- adjustable spraying area
- silicone nozzles to reduce the risk of clogging
- needle for cleaning dirty nozzles
- maximum spraying area 344m2

S101410284	-	1/6	pc

EXP hose trolley

EXP



- aluminum and plastic construction
- handle height adjustment
- crank with comfortable handle
- large transport wheels
- tool-free assembly
- trolley capacity:
- 1/2" - 60m
- 5/8" - 40m

S101610215	60 m	1	pc

EXP hose hanger

EXP



- holes for mounting to the wall
- integrated holders for sprinkler devices
- hanger capacity:
- 1/2" - 40m
- 5/8" - 35m
- 3/4" - 25m

S101610203	-	1/10/50	pc

Metal trolley for EXP hose

EXP



- construction made of aluminum and plastic
- drum made of powder-coated steel
- adjustable handle height
- crank with a comfortable grip
- large transport wheels
- assembly without tools
- trolley capacity:
- 1/2" - 60m
- 5/8" - 40m

S101610218	60 m	1	pc

EXP Holder for Reels and Carts

EXP



- Brackets for mounting reels, trolleys, and sprinkler systems
- Wall mounting holes
- Maximum load capacity - 20 kg

S101610209	-	1/4	pc

EXP automatic hose reel

EXP



- housing made of resistant PP material
- a mechanism that locks the hose when unwinding, regulating the winding speed
- automatic hose guidance
- adjustable hose lock
- 180° rotating wall mount
- carrying handle
- set includes a hose and 1/2" connectors with a spray nozzle
- hose length: 25 m

S101610230	25 m	1	pc
S101610233	35 m	1	pc

Quick connector STR

STR

FITS WITH OTHER BRANDS UNI FIT



- ABS

S101010400	1/2"	30/30	pc
S101010406	3/4"	30/30	pc

Triple connector STR

STR

FITS WITH OTHER BRANDS UNI FIT



- ABS

S101010445	-	30/30	pc

Quick connector with stop STR

STR

FITS WITH OTHER BRANDS UNI FIT



- ABS

S101010403	1/2"	30/30	pc
S101010409	3/4"	30/30	pc

Connection with internal thread STR

STR

FITS WITH OTHER BRANDS UNI FIT



- ABS
- TPR

S101010448	1/2"	30/30	pc
S101010451	3/4"	30/30	pc
S101010454	1"	30/30	pc

Reparator STR

STR



- ABS

S101010430	1/2"	30/30	pc
S101010433	3/4"	30/30	pc

Connection with internal thread STR

STR

FITS WITH OTHER BRANDS UNI FIT



- ABS
- TPR
- reduction

S101010457	1/2" - 3/4"	30/30	pc
S101010460	3/4" - 1"	30/30	pc

Reparator STR

STR



- ABS
- reduction joint

S101010436	1/2" - 3/4"	30/30	pc

Connection with external thread STR

STR

FITS WITH OTHER BRANDS UNI FIT



- ABS

S101010463	1/2"	30/30	pc
S101010466	3/4"	30/30	pc

Double connector STR

STR

FITS WITH OTHER BRANDS UNI FIT



- ABS

S101010442	-	30/30	pc

Double distributor with STR valves

STR

FITS WITH OTHER BRANDS UNI FIT



- two-way water source division
- ABS

S101010472	-	1/12/48	pc

Adjustable spray nozzle STR

STR

FITS WITH OTHER BRANDS UNI FIT



- ABS
- regulation of the spray stream

S101210400	-	20/20	pc

Straight sprinkler on a pin STR

STR

FITS WITH OTHER BRANDS UNI FIT



- ABS
- pin fixing to the ground
- maximum sprinkler diameter 10m

S101410400	-	1/12/48	pc

4-piece set with STR spray nozzle

STR

FITS WITH OTHER BRANDS UNI FIT



- set of connectors with an spray nozzle
- ABS

S101210412	1/2"	1/50	pc
S101210415	3/4"	1/50	pc

8-function sprinkler on a STR pin

STR

FITS WITH OTHER BRANDS UNI FIT



- ABS
- pin fixing to the ground
- possibility of serial connection of
- 8 sprinkler functions

S101410412	-	1/50	pc

Adjustable spray gun STR

STR

FITS WITH OTHER BRANDS UNI FIT



- ABS
- TPR
- spray flow adjustment

S101210430	-	1/12/48	pc

8-function sprinkler based on STR

STR

FITS WITH OTHER BRANDS UNI FIT



- ABS
- stable base
- 8 sprinkling functions

S101410415	-	1/12/24	pc

8-function spray gun STR

STR

FITS WITH OTHER BRANDS UNI FIT



- ABS
- TPR
- 8 sprinkler functions

S101210433	-	1/12/48	pc

Three-arm rotary sprinkler on a STR pin

STR

FITS WITH OTHER BRANDS UNI FIT



- ABS
- three-arms
- regulation of the sprinkler area with sprinkler arms
- pin fastening to the ground
- possible serial connection
- maximum sprinkler diameter 16 m

S101410430	-	1/50	pc

Pulse sprinkler on a STR pin

STR

FITS WITH OTHER BRANDS
UNI FIT



- ABS
- regulation of the spraying area
- pin fixing to the ground
- possibility of serial connection
- operating range from 30° to 360°
- maximum spraying area 380m2

S101410451	-	1/50	pc

Swinging sprinkler STR

STR

FITS WITH OTHER BRANDS
UNI FIT



- ABS
- regulation of the spraying area
- needle for cleaning dirty nozzles
- maximum spraying area 270m2

S101410481	-	1/6	pc

STR HF feed-through quick connector

STR



- HIGH FLOW - connecting system with increased flow
- ABS

S101010500	3/4"	30/30	pc
S101010506	1"	20/20	pc

Quick connector with STR HF alloy

STR



- HIGH FLOW - connecting system with increased flow
- ABS

S101010503	3/4"	30/30	pc
S101010509	1"	20/20	pc

STR HF repairer

STR



- HIGH FLOW - connecting system with increased flow
- ABS

S101010533	1"	20/20	pc
S101010536	3/4" - 1"	20/20	pc

STR HF double connector

STR



- HIGH FLOW - connecting system with increased flow
- ABS

S101010542	-	30/30	pc

Double connector with STR HF reduction

STR



- HIGH FLOW to UNI FIT - allows you to connect the fittings of two systems
- ABS

S101010545	-	30/30	pc

STR HF triple connector

STR



- HIGH FLOW - connecting system with increased flow
- ABS

S101010548	-	20/20	pc

Triple connector with STR HF reduction

STR



- HIGH FLOW to UNI FIT - allows you to connect the fittings of two systems
- ABS

S101010551	-	20/20	pc

Connection with internal thread STR HF

STR



- HIGH FLOW - connecting system with increased flow
- ABS
- TPR

S101010554	1"	20/20	pc

Connection with internal thread STR HF

STR



- HIGH FLOW - connecting system with increased flow
- ABS
- TPR
- reduction

S101010560	3/4" - 1"	20/20	pc

Connection with external thread STR HF

STR



- HIGH FLOW - connecting system with increased flow
- ABS

S101010566	3/4"	30/30	pc

STR HF adjustable spray nozzle

STR



- HIGH FLOW - connecting system with increased flow
- ABS

S101210500	-	20/20	pc

BRS feed-through quick connector

BRS

FITS WITH OTHER BRANDS UNI FIT



- brass

S101010600	1/2"	1/10/80	pc
S101010606	3/4"	1/10/80	pc

Quick connector with BRS alloy

BRS

FITS WITH OTHER BRANDS UNI FIT



- brass

S101010603	1/2"	1/10/80	pc
S101010609	3/4"	1/10/80	pc

BRS repairer

BRS

FITS WITH OTHER BRANDS UNI FIT



- brass

S101010630	1/2"	1/10/80	pc
S101010633	3/4"	1/10/80	pc

BRS double connector

BRS

FITS WITH OTHER BRANDS UNI FIT



- brass

S101010642	-	1/10/80	pc

BRS triple connector

BRS

FITS WITH OTHER BRANDS UNI FIT



- brass

S101010645	-	1/10/80	pc

Connection with BRS internal thread

BRS

FITS WITH OTHER BRANDS UNI FIT



- brass

S101010651	3/4"	1/10/80	pc
S101010654	1"	1/10/80	pc

Connection with BRS internal thread

BRS

FITS WITH OTHER BRANDS UNI FIT



- brass
- reduction

S101010657	1/2" - 3/4"	1/10/80	pc
S101010660	3/4" - 1"	1/10/80	pc

Connection with BRS external thread

BRS

FITS WITH OTHER BRANDS UNI FIT



- brass

S101010666	3/4"	1/10/80	pc

BRS double distributor

BRS

FITS WITH OTHER BRANDS UNI FIT



- two-way division of the water source
- brass

S101010672	-	1/10/60	pc

BRS adjustable spray nozzle

BRS

FITS WITH OTHER BRANDS UNI FIT



- brass
- spray flow adjustment

S101210600	-	1/10/80	pc

BRS adjustable spray gun

BRS

FITS WITH OTHER BRANDS UNI FIT



- aluminum
- spray flow regulation
- resistant, brass connector

S101210603	-	1/12/24	pc

BRS 8-function spray gun

BRS

FITS WITH OTHER BRANDS UNI FIT



- aluminum
- 8 sprinkling functions
- resistant, brass connector

S101210606	-	1/12/24	pc

Connector with BRS internal thread

BRS



- CLAW FIT - claw connection system
- brass
- spacing of claws 40 mm

S101010700	1/2"	1/10/80	pc
S101010703	3/4"	1/10/80	pc
S101010706	1"	1/10/80	pc

BRS male thread connector

BRS



- CLAW FIT - claw connection system
- brass
- spacing of claws 40 mm

S101010709	1/2"	1/10/80	pc
S101010712	3/4"	1/10/80	pc
S101010715	1"	1/10/80	pc

BRS hose connector with spigot



- CLAW FIT - claw connection system
- brass
- spacing of claws 40 mm

S101010718	1/2"	1/10/80	pc
S101010721	3/4"	1/10/80	pc
S101010724	1"	1/10/80	pc

BRS closing connector



- CLAW FIT - claw connection system
- brass
- spacing of claws 40mm

S101010742	-	1/10/80	pc

Swivel connector with BRS hose connector



- CLAW FIT - claw connection system
- brass
- spacing of claws 40 mm

S101010727	1/2"	1/10/80	pc
S101010730	3/4"	1/10/80	pc
S101010733	1"	1/10/80	pc

BRS Globe-Type Tap Valve



- Plumbing connection size - 1/2”
- Quick-connector connection size - 3/4”
- Brass

S101010763	-	1/10/60	pc

BRS tee



- CLAW FIT - claw connection system
- brass
- spacing of claws 40 mm

S101010736	-	1/10/48	pc

BRS Ball-Type Tap Valve



- Plumbing connection size - 1/2”
- Quick-connector connection size - 3/4”
- Brass

S101010754	-	1/5/60	pc

Connector with a spigot for the BRS quick connector



- CLAW FIT to UNI FIT - allows you to connect fittings from two systems
- brass
- center spacing 40mm

S101010739	-	1/10/80	pc

ATS XTR garden hose

XTR



- 5-layer hose
- ATS 2 - Anti-twist hose system
- reinforced with a cross-tricot braid
- bursting pressure 30 bar
- temperature range from -20°C to +60°C
- resistant to UV radiation,
- resistant to algae deposition inside the hose
- free from cadmium, barium and lead
- free from phthalates

S102021220	1/2" 20 m	1/99	pc
S102021230	1/2" 30 m	1/66	pc
S102021250	1/2" 50 m	1/42	pc
S102023420	3/4" 20 m	1/48	pc
S102023430	3/4" 30 m	1/36	pc
S102023450	3/4" 50 m	1/24	pc

EXP garden hose

EXP



- 3-layer hose
- reinforced with a cross braid
- bursting pressure 25 bar
- temperature range from -20°C to +60°C
- resistant to UV radiation
- resistant to algae deposition inside the hose.

S102061220	1/2" 20 m	1/176	pc
S102061230	1/2" 30 m	1/110	pc
S102061250	1/2" 50 m	1/78	pc
S102063420	3/4" 20 m	1/96	pc
S102063430	3/4" 30 m	1/72	pc
S102063450	3/4" 50 m	1/42	pc

ATS EXP garden hose

EXP



- 4-layer hose
- ATS - Anti-twist hose system
- reinforced with tricot braid
- bursting pressure 25 bar
- temperature range from -20°C to +60°C
- resistant to UV radiation
- resistant to algae deposition inside the hose.

S102041220	1/2" 20 m	1/99	pc
S102041230	1/2" 30 m	1/66	pc
S102041250	1/2" 50 m	1/42	pc
S102043420	3/4" 20 m	1/54	pc
S102043430	3/4" 30 m	1/36	pc
S102043450	3/4" 50 m	1/24	pc

Garden hose PAGE

STR



- 4-layer hose
- reinforced with a cross braid
- bursting pressure 20 bar
- temperature range from -10°C to +50°C
- resistant to UV radiation
- resistant to algae deposition inside the hose

S102081215	1/2" 15 m	1/253	pc
S102081220	1/2" 20 m	1/198	pc
S102081230	1/2" 30 m	1/154	pc
S102081250	1/2" 50 m	1/108	pc
S102083420	3/4" 20 m	1/108	pc
S102083430	3/4" 30 m	1/78	pc
S102083450	3/4" 50 m	1/54	pc
S102081010	1" 10 m	1/108	pc
S102081020	1" 20 m	1/54	pc

EXP hand pressure sprayer



- tank made of durable HDPE material
- pump with a metal piston
- adjustable nozzle
- safety valve
- ergonomic handle
- trigger lock

S103210206	1.5 L	1/12	pc
S103210209	2 L	1/12	pc

EXP pressure sprayer



- tank made of durable HDPE material
- pump with a metal piston
- stainless steel telescopic lance
- lance holder
- 150 cm long hose
- hose holder
- transport strap
- adjustable nozzle
- safety valve
- trigger lock in the handle

S103210215	5 L	1/6	pc
S103210218	8 L	1/6	pc

Manual pressure sprayer STR



- tank made of durable HDPE plastic
- adjustable nozzle
- trigger lock

S103210406	1.5 L	1/20	pc
S103210409	2 L	1/20	pc


STR pressure sprayer



- tank made of durable HDPE material
- stainless steel telescopic lance
- 150 cm long hose
- transport strap
- adjustable nozzle
- safety valve
- trigger lock in the handle

S103210415	5 L	1/6	pc
S103210418	8 L	1/6	pc

NBR seal set for EXP sprayers



- accessory for EXP Stalco Garden sprayers

S103410203	-	1	set

Telescopic lance with nozzle for EXP sprayers



- accessory for EXP Stalco Garden sprayers
- stainless steel telescopic lance, 47 - 74 cm long

S103410212	-	1	pc

Valve with handle and 150cm hose for EXP sprayers



- accessory for EXP Stalco Garden sprayers
- 150cm hose
- trigger lock in the handle

S103410221	-	1	pc

Pump for EXP sprayers



- accessory for EXP Stalco Garden sprayers
- pump with a metal piston

S103410230	-	1	pc

NBR seal set for STR sprayers

STR



- accessory for STR Stalco Garden sprayers

S103410403	-	1	set

Telescopic lance with nozzle for STR sprayers

STR



- accessory for STR Stalco Garden sprayers
- stainless steel telescopic lance, 47 - 74 cm long

S103410412	-	1	pc

Valve with handle and 150cm hose for STR sprayers



- accessory for STR Stalco Garden sprayers
- 150cm hose
- trigger lock in the handle

S103410421	-	1	pc

Herbicide cover - universal



- universal accessory for Stalco Garden sprayers

S103410503	-	1	pc

Garden tools

Scissor pruner STR

STR



- blade made of Japanese high-carbon SK5 steel, Teflon-coated
- scissor blade (passing) for cutting young shoots and branches
- comfortable, aluminum handles
- handle lock

S104010406	-	1/10	pc

Scissor pruner STR

STR



- blade made of Japanese high-carbon steel SK5, Teflon-coated
- scissor blade (passing) for cutting young shoots and branches
- gear increasing cutting force
- comfortable aluminum handles
- handle lock

S104010412	-	1/6	pc

Anvil pruning shears STR

STR



- blade made of Japanese high-carbon SK5 steel, Teflon-coated
- anvil blade for cutting dry and woody branches
- gear increasing cutting force
- comfortable aluminum handles
- handle lock

S104010415	-	1/6	pc

Scissor pruner STR

STR



- blade made of Japanese high-carbon steel SK5, Teflon-coated
- scissor blade (passing) for cutting young shoots and branches
- comfortable nylon handles
- adjustable handle opening
- handle lock

S104010421	-	1/10	pc

Anvil pruning shears STR

STR



- blade made of Japanese high--carbon steel SK5, Teflon-coated
- anvil blade for cutting dry and woody branches
- comfortable nylon handles
- adjustable handle opening
- handle lock

S104010424	-	1/10	pc

Anvil loppers STR

STR



- blade made of Japanese high-carbon steel SK5, Teflon-coated
- anvil blade for cutting dry and woody branches
- gear increasing cutting force
- light aluminum handles
- comfortable, non-slip handles

S104020421	790 mm	1/10	pc

Branch shears STR

STR



- blade made of Japanese high-carbon steel SK5, Teflon-coated
- scissor blade (passing) for cutting young shoots and branches
- light, aluminum handles
- comfortable, non-slip handles

S104020406	790 mm	1/10	pc

STR telescopic anvil branch loppers

STR



- blade made of Japanese high-carbon steel SK5, Teflon-coated
- anvil blade for cutting dry and woody branches
- gear increasing cutting force
- telescopic, aluminum handles
- comfortable, non-slip handles

S104020424	650-990 mm	1/10	pc

STR telescopic loppers

STR



- blade made of Japanese high-carbon steel SK5, Teflon-coated
- scissor blade (passing) for cutting young shoots and branches
- telescopic, aluminum handles
- comfortable, non-slip handles

S104020409	650-990 mm	1/10	pc

Hedge trimmer STR

STR



- blade made of high-quality carbon steel
- light, aluminum handles
- comfortable, non-slip handles

S104040406	630 mm	1/10	pc

Branch shears STR

STR



- blade made of Japanese high-carbon steel SK5, Teflon-coated
- scissor blade (passing) for cutting young shoots and branches
- gear increasing cutting force
- light, aluminum handles
- comfortable, non-slip handles

S104020412	730 mm	1/10	pc

STR telescopic hedge trimmers

STR



- blade made of high-quality carbon steel
- telescopic, aluminum handles
- comfortable, non-slip handles

S104040409	690-860 mm	1/10	pc

STR telescopic loppers

STR



- blade made of Japanese high-carbon steel SK5, Teflon-coated
- scissor blade (passing) for cutting young shoots and branches
- gear increasing cutting force
- telescopic, aluminum handles
- comfortable, non-slip handles

S104020415	630-950 mm	1/10	pc

EXP Utility Knife

EXP



- Stainless steel blade
- Equipped with a belt clip and sheath
- Blade length - 95 mm
- Total length - 218 mm

S104060400	-	1/12/48	pc

EXP foldable garden saw



- blade made of Japanese high-carbon steel SK5, covered with Teflon
- teeth sharpened in three planes
- comfortable, aluminum handle covered with TPR material
- ability to fold the blade in the handle

S104070212	230 mm	1/6	pc

EXP garden saw



- blade made of high-quality carbon steel
- teeth sharpened in three planes
- blade covered with Teflon
- comfortable aluminum handle covered with TPR material

S104070221	270 mm	1/6	pc

EXP bow saw



- saw blade made of high-quality carbon steel
- comfortable handle
- knob for adjusting the blade tension

S104070257	533 mm	1/12	pc
S104070260	610 mm	1/12	pc

EXP bow saw blade for wet wood



- saw blade made of high-quality carbon steel

S104097257	533 mm	1/20	pc
S104097260	610 mm	1/20	pc

EXP bow saw blade for dry wood



- saw blade made of high-quality carbon steel

S104097258	533 mm	1/20	pc
S104097261	610 mm	1/20	pc

EXP universal ax



- head made of forged carbon steel
- Teflon-coated blade
- lightweight fiberglass handle
- safe, non-slip handle
- transport handle

S104210203	630 g	1/12/24	pc
S104210206	950 g	1/6/12	pc

EXP Splitting Axe



- splitting head made of forged carbon steel
- Teflon-coated blade
- lightweight fiberglass handle
- safe, non-slip handle
- transport handle

S104210209	1240 g	1/6/12	pc
S104210212	1710 g	1/4/8	pc
S104210215	2300 g	1/2/4	pc

EXP ax and knife sharpener



- ceramic sharpening roller
- housing made of durable ABS plastic
- compact size
- ability to sharpen axes and knives

S104210251	-	1/12/120	pc

XTR wide shovel



- working part made of stainless steel
- comfortable handle covered with soft TPR material
- hole in the handle for hanging

S105610000	-	1/12/72	pc

XTR nails



- working part made of stainless steel
- comfortable handle covered with soft TPR material
- hole in the handle for hanging

S105610015	-	1/12/72	pc

XTR narrow shovel



- working part made of stainless steel
- comfortable handle covered with soft TPR material
- hole in the handle for hanging

S105610003	-	1/12/72	pc

XTR hoe



- working part made of stainless steel
- comfortable handle covered with soft TPR material
- hole in the handle for hanging

S105610018	-	1/12/72	pc

XTR forks



- working part made of stainless steel
- comfortable handle covered with soft TPR material
- hole in the handle for hanging

S105610006	-	1/12/72	pc

EXP wide spatula



- working part made of powder-coated steel
- light plastic handle
- hole in the handle for hanging

S105610200	-	1/12/72	pc

XTR rakes



- working part made of stainless steel
- comfortable handle covered with soft TPR material
- hole in the handle for hanging

S105610009	-	1/12/72	pc

EXP narrow spatula



- working part made of powder-coated steel
- light plastic handle
- hole in the handle for hanging

S105610203	-	1/12/72	pc

XTR fan rakes



- working part made of stainless steel
- comfortable handle covered with soft TPR material
- hole in the handle for hanging

S105610012	-	1/12/72	pc

EXP forks



- working part made of powder-coated steel
- light plastic handle
- hole in the handle for hanging

S105610206	-	1/12/72	pc

EXP rakes



- working part made of powder-coated steel
- light plastic handle
- hole in the handle for hanging

S105610209	-	1/12/72	pc

EXP fan rakes



- working part made of powder-coated steel
- light plastic handle
- hole in the handle for hanging

S105610212	-	1/12/72	pc

EXP claws



- working part made of powder-coated steel
- light plastic handle
- hole in the handle for hanging

S105610215	-	1/12/72	pc

EXP hoe



- working part made of powder-coated steel
- light plastic handle
- hole in the handle for hanging

S105610218	-	1/12/72	pc

Wide shoulder PAGE



- light tool made of plastic
- hole in the handle for hanging

S105610400	-	1/10	pc

Narrow spatula STR



- light tool made of plastic
- hole in the handle for hanging

S105610403	-	1/10	pc

Fork PAGE



- light tool made of plastic
- hole in the handle for hanging

S105610406	-	1/10	pc

Nails STR



- light tool made of plastic
- hole in the handle for hanging

S105610415	-	1/12	pc

Hoe PAGE



- light tool made of plastic
- hole in the handle for hanging

S105610418	-	1/12	pc

Knee pad PAGE

STR



- pad made of soft foam
- large size
- transport handle

S105610448	-	1/20	pc

Set of small garden tools STR

STR



- a set of light tools made of plastic
- including a universal basket, a washer and 5 tools

S105610451	-	1/6	set

EXP straight spade

EXP



- shovel made of hardened steel
- straight end of the working part
- embossments strengthening the spad
- long, ergonomic handle with anti-slip coating
- comfortable plastic handle

S105010200	-	1/4	pc

Sharp spade EXP

EXP



- shovel made of hardened steel
- sharp end of the working part
- embossments strengthening the spade
- long, ergonomic handle with anti-slip coating
- comfortable plastic handle

S105010203	-	1/4	pc

EXP shovel

EXP



- shovel made of hardened steel
- extended working part
- long, ergonomic handle with non-slip coating
- comfortable plastic handle

S105010209	-	1/4	pc

TRADITIONAL straight spade



- working part made of hardened steel
- steel D holder with wooden handle
- waxed handle made of beech wood
- straight end of the working part

S105010600	-	1/4	pc

TRADITIONAL sharp spade



- working part made of hardened steel
- steel handle holder D with wooden handle
- waxed handle made of beech wood
- sharp end of the working part

S105010603	-	1/4	pc

TRADITIONAL shovel



- working part made of hardened steel
- long, profiled and waxed beech wood handle

S105010609	-	1/4	pc

TRADITIONAL rake



- working part made of hardened steel
- mounting of the working part to the handle in the form of a sleeve
- waxed handle made of beech wood

S105210606	12 z	1/4	pc
S105210612	16 z	1/4	pc

Pointed spade



- made of high-grade Swedish SAAB boron steel
- hardened steel
- pressed worktop
- metal handle covered with a non-slip rubber cap
- two-component handle

S-74005	0	1/5	pc

TRADITIONAL hoe



- working part made of hardened steel
- mounting of the working part to the handle in the form of a sleeve
- waxed handle made of beech wood

S105210651	18 cm	1/4	pc

Sand shovel



- made of high-grade Swedish SAAB boron steel
- hardened steel
- pressed worktop
- metal handle covered with a non-slip rubber cap
- two-component handle

S-74001	0	1/5	pc

TRADITIONAL three-tine conditioner



- working part made of hardened steel
- mounting of the working part to the handle in the form of a sleeve
- waxed handle made of beech wood

S105210660	-	1/4	pc

Rake Ergo



- tempered
- 16 teeth
- metal handle
- rubber-coated handle

S-74009	-	16 teeth ; hardened	pc

Straight spade



- made of high-grade Swedish SAAB boron steel
- hardened steel
- pressed worktop
- metal handle covered with a non-slip rubber cap
- two-component handle

S-74003	0	1/5	pc

Universal rake EXP



- working part made of flexible material
- light, long aluminum handle with non-slip coating
- comfortable handle
- pendant in the handle

S105210312	12 z	1/12	pc
S105210315	18 z	1/12	pc

EXP leaf rake

EXP



- working part made of flexible material
- light, long aluminum handle with non-slip coating
- comfortable handle
- pendant in the handle

S105210330	50 cm	1/12	pc
S105210333	60 cm	1/12	pc

EXP brush

EXP



- working part made of flexible material
- light, long aluminum handle with non-slip coating
- comfortable handle
- pendant in the handle

S105210351	40 cm	1/12	pc
S105210354	65 cm	1/12	pc

Adjustable rake STR

STR



- working part made of hardened steel
- head width adjustment
- steel shaft

S105210500	-	1/12	pc

Adjustable aluminum, telescopic rake STR

STR



- working part made of hardened steel
- adjustable head width
- lightweight, aluminum telescopic handle

S105210506	-	1/12	pc

EXP weed plucker

EXP



- working part consisting of three stainless steel gripping teeth
- light aluminum shaft
- solid driving foot
- handle with a spring mechanism for releasing pulled out weeds

S105210372	-	1/5	pc

Foldable garden basket with a reinforced XTR bottom

XTR



- baskets made of durable, water-proof OXFORD material
- bottom reinforced with plastic
- transport handles
- foldable structure
- protected upper collar, tightened with a string
- snaps to facilitate closing the basket after folding.

S106610003	80 years	1/6	pc
S106610006	172 L	1/6	pc

Folding garden basket EXP

EXP



- baskets made of durable, water-proof OXFORD material
- transport handles
- foldable construction
- Velcro makes it easy to fold the basket

S106610203	80 years	1/10	pc
S106610206	172 L	1/10	pc

Round cutting line



- line made of high-quality tear-resistant nylon
- line shape: round
- line length: 15 m
- packaging: Blister

S053997001	1.3 mm x 15m	1/10/120	pc
S053997002	1.6 mm x 15m	1/10/120	pc
S053997003	2.0 mm x 15m	1/10/120	pc
S053997004	2.4 mm x 15m	1/10/80	pc
S053997005	2.7 mm x 15m	1/10/80	pc
S053997006	3.0 mm x 15m	1/10/80	pc

Star cutting line



- line made of high-quality tear-resistant nylon
- line shape: star
- line length: 15m
- packaging: Blister

S053997041	1.3 mm x 15m	1/10/120	pc
S053997042	1.6 mm x 15m	1/10/120	pc
S053997043	2.0 mm x 15m	1/10/120	pc
S053997044	2.4 mm x 15m	1/10/120	pc
S053997045	2.7 mm x 15m	1/10/80	pc
S053997046	3.0 mm x 15m	1/10/80	pc

Round cutting line



- line made of high-quality tear-resistant nylon
- line shape: round
- line length: 15 m

S053997014	2.4 mm x 90 m - spool	1/16	pc
S053997015	2.7 mm x 70 m - spool	1/16	pc
S053997016	3.0 mm x 56 m - spool	1/16	pc

Star cutting line



- line made of high-quality tear-resistant nylon
- line shape: star
- line length: 15m

S053997054	2.4 mm x 90 m - spool	1/16	pc
S053997055	2.7 mm x 70 m - spool	1/16	pc
S053997056	3.0 mm x 60 m - spool	1/16	pc

Square cutting line



- line made of high-quality tear-resistant nylon
- line shape: square
- line length: 15 m
- packaging: Blister

S053997021	1.3 mm x 15m	1/10/120	pc
S053997022	1.6 mm x 15m	1/10/120	pc
S053997023	2.0 mm x 15m	1/10/120	pc
S053997024	2.4 mm x 15m	1/10/80	pc
S053997025	2.7 mm x 15m	1/10/80	pc
S053997026	3.0 mm x 15m	1/10/40	pc

Square Twist cutting line



- line made of high-quality tear-resistant nylon
- line shape: square twisted
- line length: 15 m
- packaging: Blister

S053998004	2.4 mm x 15m	1/10/80	pc
S053998005	2.7 mm x 15m	1/10/80	pc
S053998006	3.0 mm x 15m	1/10/80	pc

Square cutting line



- line made of high-quality tear-resistant nylon
- line shape: square
- line length: 15 m

S053997034	2.4 mm x 90 m - spool	1/16	pc
S053997035	2.7 mm x 70 m - spool	1/16	pc
S053997036	3.0 mm x 56 m - spool	1/16	pc

Square Twist cutting line



- line made of high-quality tear-resistant nylon
- line shape: square twisted
- line length: 15 m

S053998014	2.4 mm x 90 m - spool	1/16	pc
S053998015	2.7 mm x 70 m - spool	1/16	pc
S053998016	3.0 mm x 60 m - spool	1/16	pc

Round XTR Core cutting line



- reinforced with XTR CORE core
- line made of high-quality tear-resistant nylon
- line shape: round
- line length: 15 m
- packaging: Blister

S053998024	2.4 mm x 15m	1/10/80	pc
S053998025	2.7 mm x 15m	1/10/80	pc
S053998026	3.0 mm x 15m	1/10/80	pc

Round XTR Core cutting line



- reinforced with XTR CORE core
- line made of high-quality tear-resistant nylon
- line shape: round
- line length: 15 m

S053998034	2.4 mm x 90 m - spool	1/16	pc
S053998035	2.7 mm x 70 m - spool	1/16	pc
S053998036	3.0 mm x 60 m - spool	1/16	pc

Square XTR Core cutting line



- line made of high-quality tear-resistant nylon
- reinforced with XTR CORE
- line shape: square
- line length: 15m
- packaging: Blister

S053998044	2.4 mm x 15m	1/10/80	pc
S053998045	2.7 mm x 15m	1/10/80	pc
S053998046	3.0 mm x 15m	1/10/40	pc

Square XTR Core cutting line





- line made of high-quality tear-resistant nylon
- reinforced with XTR CORE
- line shape: square
- line length: 15m

S053998054	2.4 mm x 90 m - spool	1/16	pc



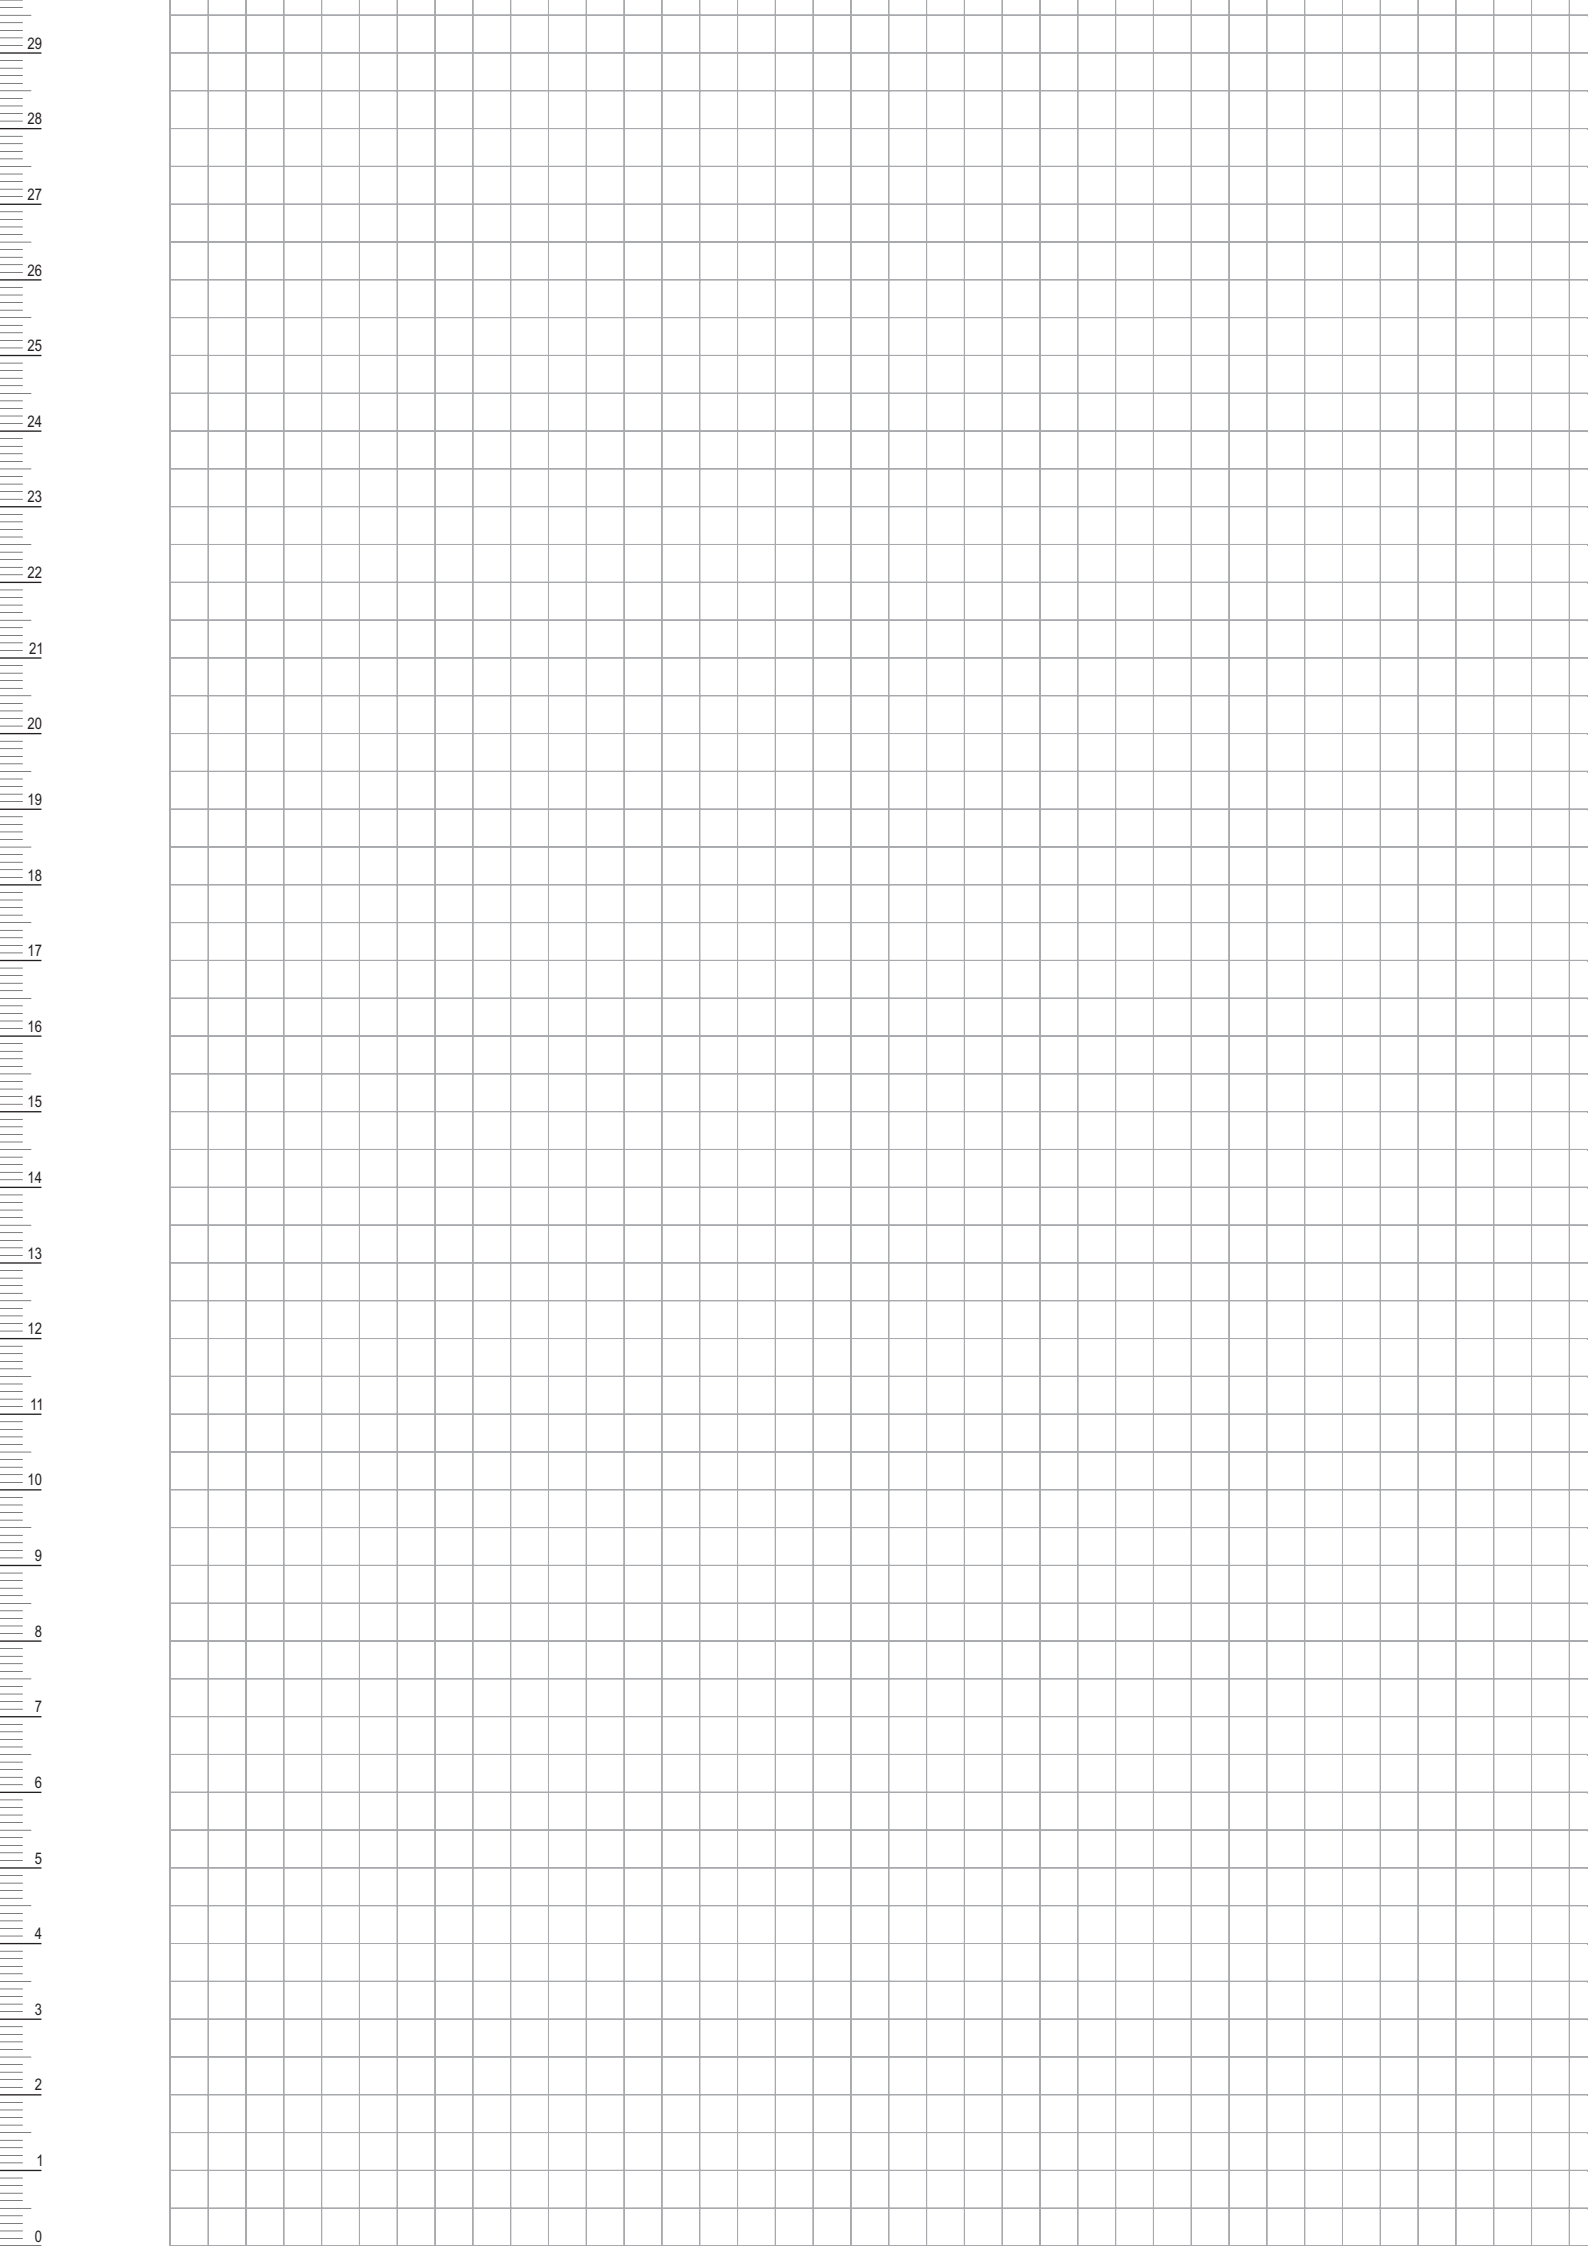


29
28
27
26
25
24
23
22
21
20
19
18
17
16
15
14
13
12
11
10
9
8
7
6
5
4
3
2
1
0

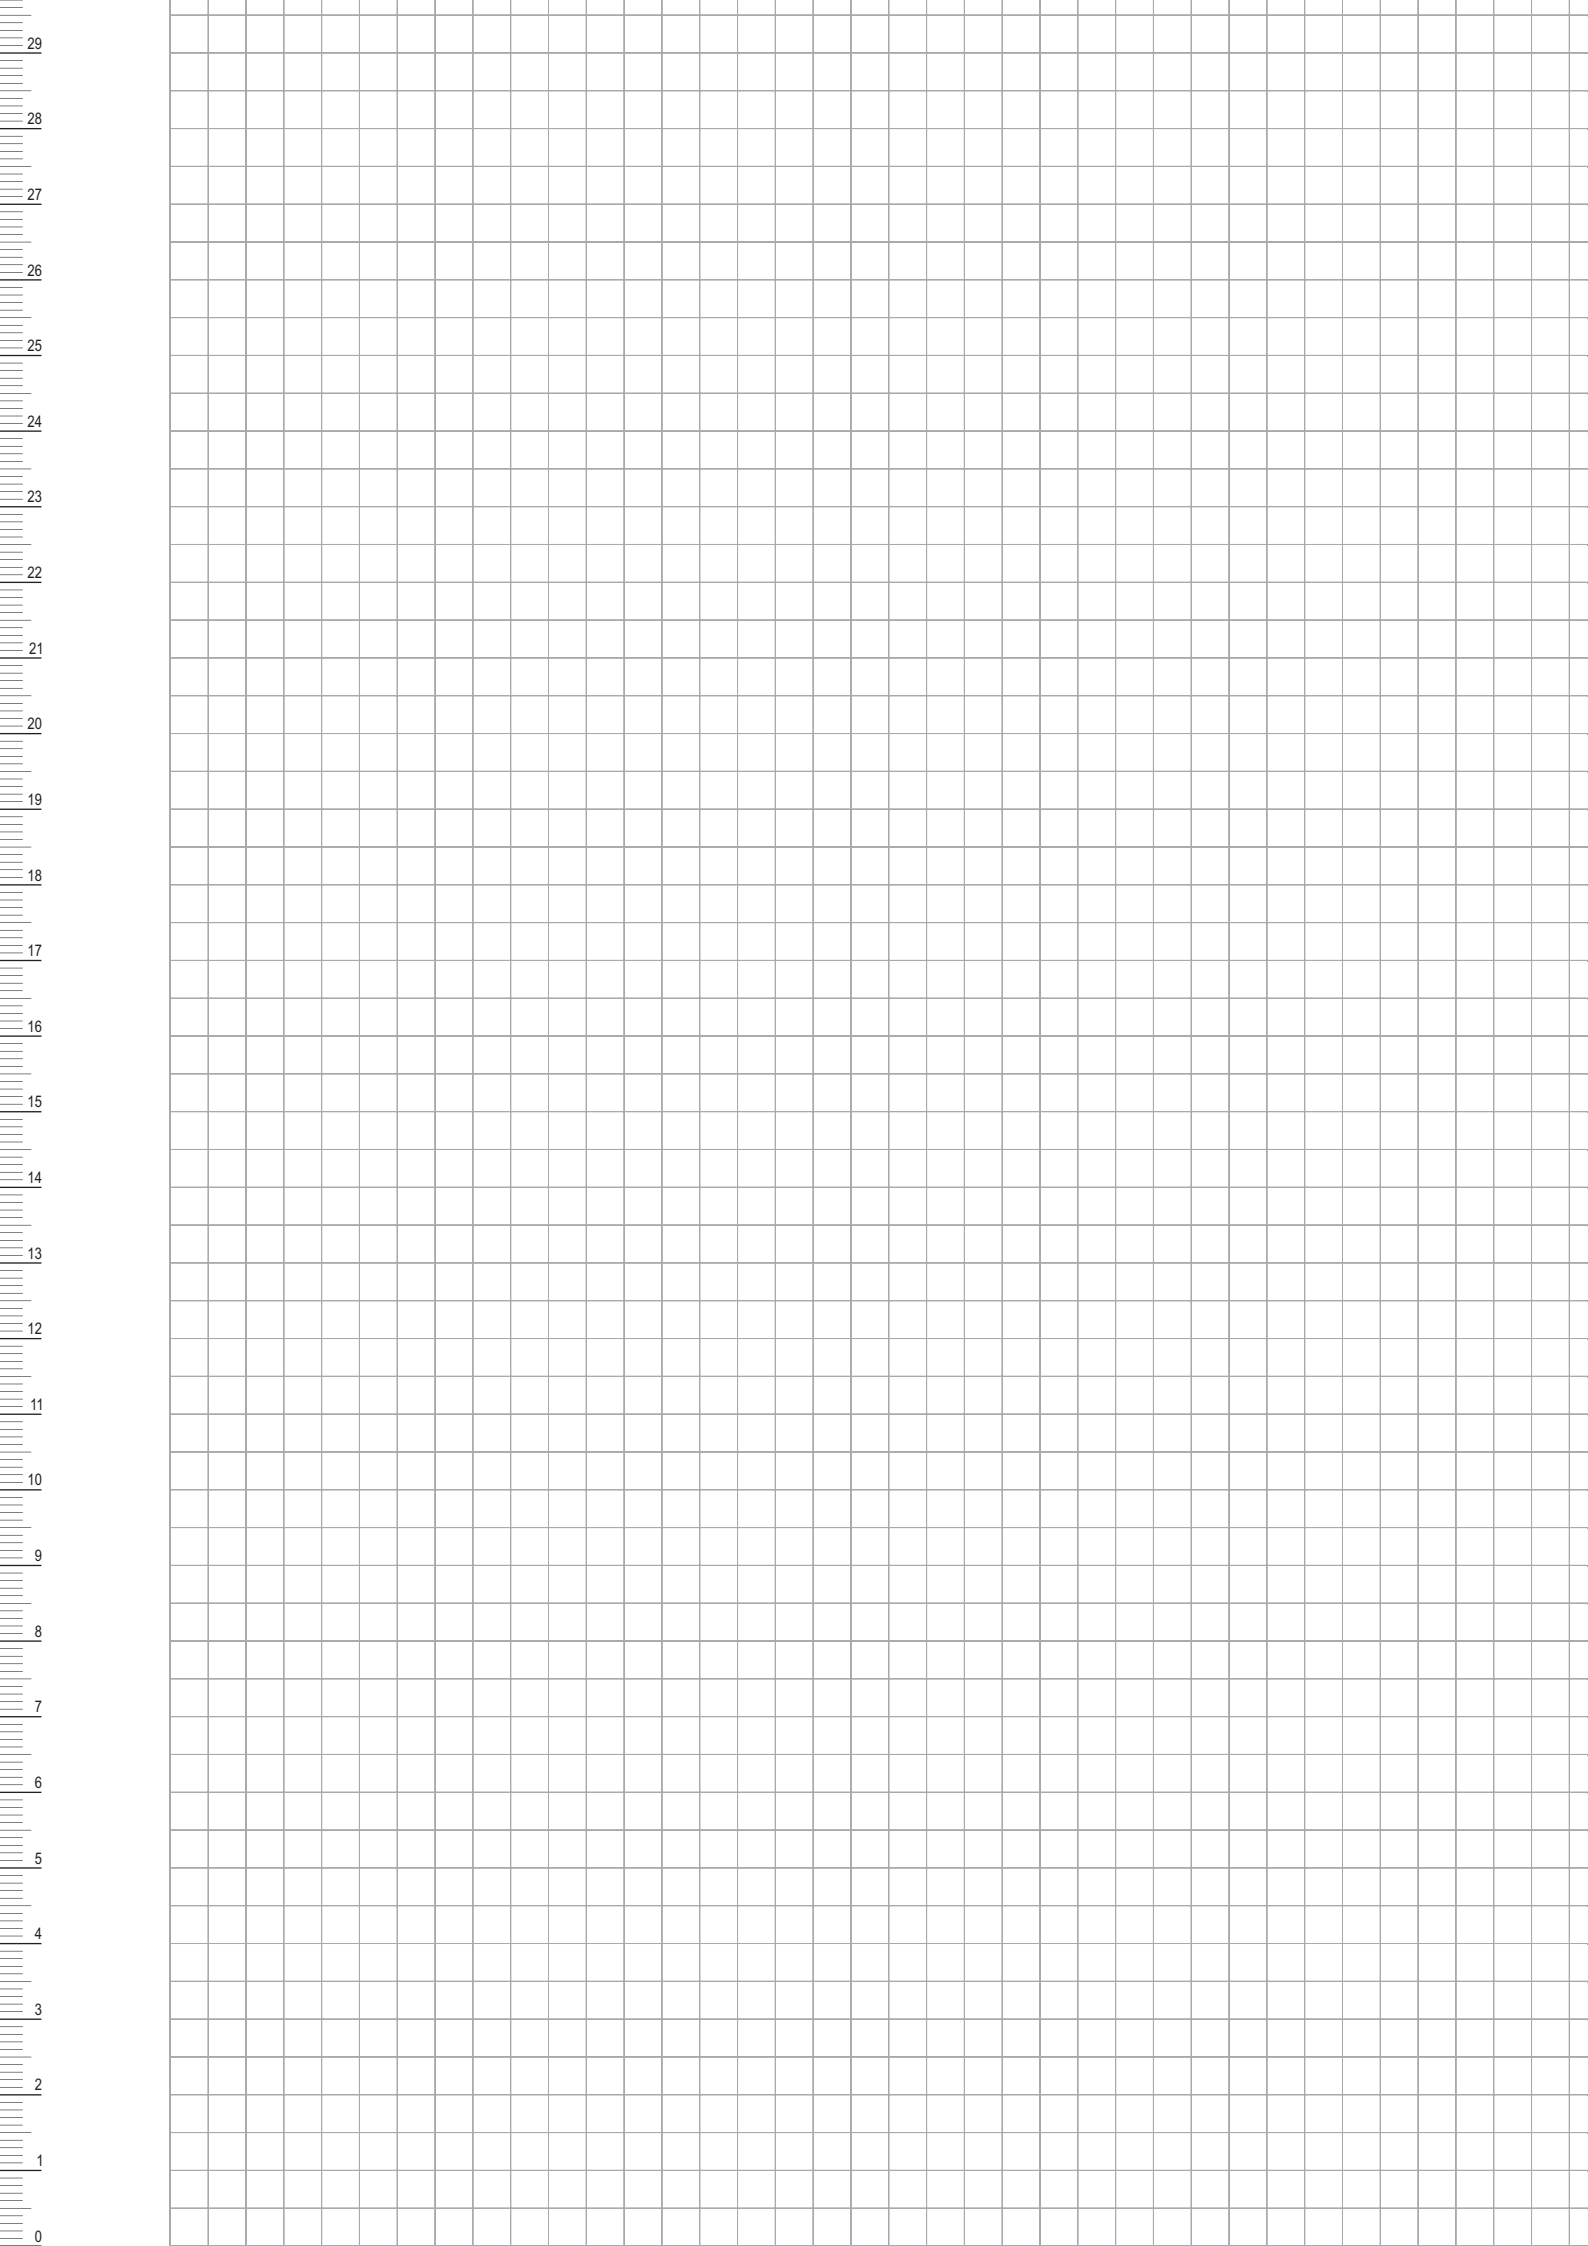
29
28
27
26
25
24
23
22
21
20
19
18
17
16
15
14
13
12
11
10
9
8
7
6
5
4
3
2
1
0

CUSTOM
SAFETY APPAREL

Ensure a professional image for your company



MARKING METHODS



EMBROIDERED



FLEX FILM



SCREEN PRINTING



THERMAL TRANSFER FILM

TO PLACE AN ORDER,
PLEASE CONTACT OUR DISTRIBUTOR

FREE QUOTATION & DESIGN!

STALCO

BUDUJEMY ***ZAUFANIE***

STALCO
Spółka z ograniczoną odpowiedzialnością S.K.A.
ul. Ofiar Katynia 1
32-050 Skawina
POLAND
Tel.: +48 12 350 04 10
e-mail: centrala@stalco.pl

www.stalco.pl

K002601
Katalog produktowy 2026
5 905947 992010